

RS PRO A10 SC Neutral white anthracite


neva
lux

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841085308

- Ideal for demanding environments such as pergolas or similar applications
- Non-visible high-frequency sensor with ø8 m range, 4000 K, 1172 lm, 10,7 W, 109,5 lm/W
- Robust aluminium housing with high impact resistance IK10 and protection class IP54
- Simple networking via Bluetooth Mesh Connect and commissioning via STEINEL Connect app
- Benefits of the Connected Lighting System and cross-range networking possible
- With plug-in terminals for easy installation

193 x 69 mm

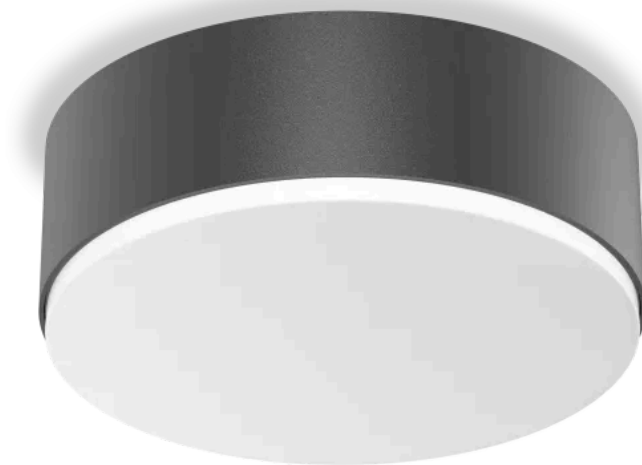

RS PRO A10 SC Neutral white anthracite

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841085308

Technical Data

IDENTIFICATION		Nevalux sensor technology		BT SIG Mesh		Settings via		Bluetooth App	
PU1 EAN		4007841085308				With remote control		No	
Material number		110090380				Twilight setting teach		Yes	
SAP designation		INNENLEUCHTE RS PRO A10 NW SC ANT				Base light function in percent		0 – 100 %	
Product name data sheet		RS PRO A10 SC Neutral white anthracite				Base light function percent from		0	
Product category		Sensor-switched LED indoor light				Base light function percent to		100	
Discount group		DL							
Source		Steinel Excel							
Product status		Normal							
Manufacturer		Steinel							
DIMENSIONS						HOUSING & MATERIAL			
Dimensions Ø × H		193 x 69 mm				Impact resistance		IK10	
PU1 net weight		0.835				Protection class (IP)		IP54	
ELECTRICAL						Protection class		II	
Mains connection		220 – 240 V / 50 – 60 Hz				Ambient temperature		from -20 up to 40 °C	
Power		10,7 W				Housing material		Aluminium	
SENSOR TECHNOLOGY						Cover material		PC, opal	
Max. mounting height		4,00 m				Mounting location		ceiling wall	
Sensor technology		High frequency				Application location		Indoors	
Transmission power		< 1 mW				Mounting type		Surface wiring	
HF technology		5,8 GHz				Application room		corridor / aisle function room / ancillary room warehouse kitchenette stairwell changing room WC / washroom	
With motion detector		Yes				Colour		Anthracite	
Detection		also through glass, wood and stud walls				Protection class ceiling		IP54	
Detection angle		360 °				SCOPE OF DELIVERY & WARRANTY			
Opening angle		160 °				Manufacturer warranty		5 years	
Segment-by-segment masking		No				House number sheet included		No	
Electronic scalability		Yes				CERTIFICATES & EPREL			
Mechanical scalability		No				EPREL category		Surrounded product with integrated light source	
Radial range		Ø 8 m (50 m²)							
Tangential range		Ø 8 m (50 m²)							
Mounting height		2,00 – 4,00 m							
Optimal mounting height		2,8 m							


RS PRO A10 SC Neutral white anthracite

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841085308

Illustrations

TECHNICAL DRAWINGS

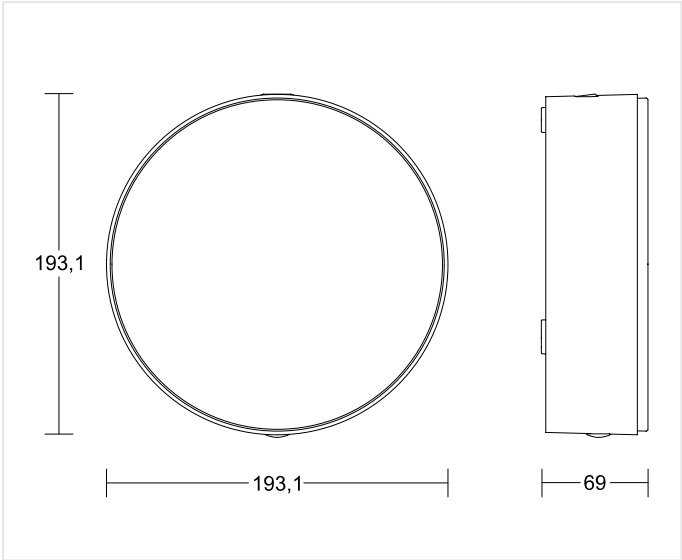

193 x 69 mm

MOUNTING HEIGHT

2,00 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

RS PRO A10 SC Neutral white anthracite

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841085308

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221386	Universal P-Set 3S	Suspension cable

ORDERING INFORMATION

Art.-Nr.

085308

EAN

4007841085308

Typ

RS PRO A10 SC Neutral white anthracite

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss