

IS 3360 MX Highbay COM1 - surface, sq.

neva
lux**MOTION DETECTOR**

EAN 4007841033569

65 x 95 x 95 mm



IS 3360 MX Highbay COM1 - surface, sq.

EAN 4007841033569

MOTION DETECTOR

Technical Data

IDENTIFICATION				SETTINGS	
PU1 EAN	4007841033569	Capacitive load in µF	176 µF	Twilight switch	Yes
Material number	110046033	Own consumption	0,26 W	Twilight setting	2 – 1000 lx
SAP designation	BEWEGUNGSMELDER IS 3360 MX-E COM1 AP WS	Switching output 1 number of LED/fluorescent lamps	8	Time setting	5 s – 15 Min.
Version	Motion detectors	Maximum inrush current	110 A	Base light function	No
Product name data sheet	IS 3360 MX Highbay COM1 - surface, sq.	SENSOR TECHNOLOGY		Main light adjustable	No
Product category	Motion detector	Max. mounting height	14,00 m	Functions	Normal / test mode Manual ON / ON-OFF
Discount group	B	Sensor technology	passive infrared	Settings via	Remote control Potentiometers Smart Remote
Source	Steinel Excel	With motion detector	Yes	With remote control	No
Product status	Normal	Detection angle	360 °	Twilight setting teach	Yes
Manufacturer	Steinel	Opening angle	180 °	HOUSING & MATERIAL	
DIMENSIONS		Sneak-under protection	Yes	Protection class (IP)	IP54
Dimensions L × W × H	65 x 95 x 95 mm	Segment-by-segment masking	Yes	Ambient temperature	from -20 up to 50 °C
PU1 net weight	0.176	Electronic scalability	No	Housing material	Plastic
ELECTRICAL		Mechanical scalability	No	Cover material	Plastic, opal
Mains connection	220 – 240 V / 50 – 60 Hz	Radial range	Ø 14 m (154 m²)	Cover material (scope of delivery)	shrouds
Power	2000 W	Tangential range	Ø 36 m (1018 m²)	Mounting location	ceiling
Switching output 1 resistive	2000 W	Switching zones	1416 switching zones	Application location	Indoors
Fluorescent lamps ECG	1500 W	Mounting height	4,00 – 14,00 m	Mounting type	Surface wiring
Fluorescent lamps uncompensated	1000 VA	Optimal mounting height	12 m	Material	Plastic
Fluorescent lamps series-compensated	400 VA	Nevalux sensor technology	On / Off	Application room	high-bay warehouse sports hall Indoors
Fluorescent lamps parallel-compensated	400 VA	CONNECTIVITY		Colour	white
Switching output 1 low-voltage halogen lamps	2000 VA	Networking	Yes	RAL colour	9003
LED lamps < 2 W	100 W	Type of networking	Master/master	SCOPE OF DELIVERY & WARRANTY	
LED lamps > 2 W < 8 W	300 W	Networking via	Cable	Manufacturer warranty	5 years
LED lamps > 8 W	600 W	LIGHTING TECHNOLOGY		Corner wall bracket included	No
		Soft light start	No		
		Continuous light	selectable, 4h		
		Constant light regulation	No		

IS 3360 MX Highbay COM1 - surface, sq.

MOTION DETECTOR

EAN 4007841033569

Illustrations

TECHNICAL DRAWINGS



65 x 95 x 95 mm

MOUNTING HEIGHT

4,00 – 14,00 m BEREICH	12 m OPTIMAL	14,00 m MAX
---------------------------	-----------------	----------------


IS 3360 MX Highbay COM1 - surface, sq.

EAN 4007841033569

MOTION DETECTOR


Wiring Diagrams

WIRING DIAGRAM 1

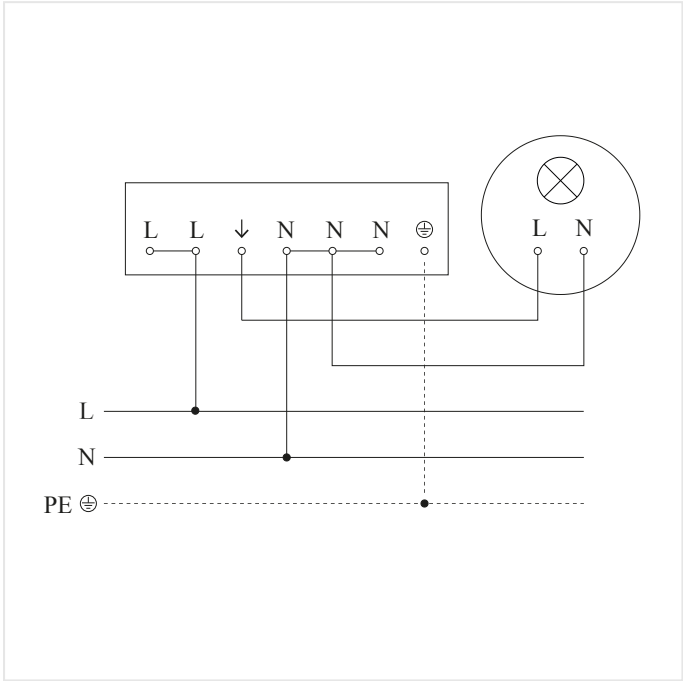

Master circuit diagram

WIRING DIAGRAM 2

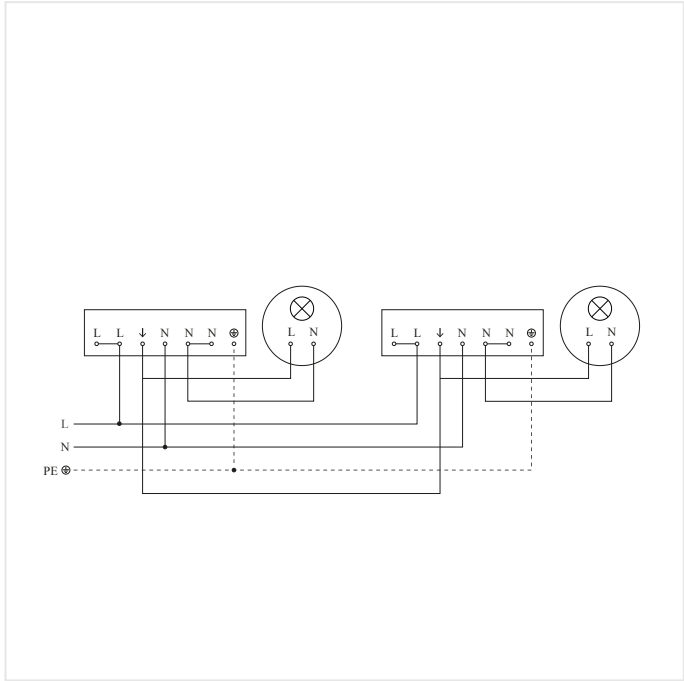

Master/slave interconnection circuit diagram

IS 3360 MX Highbay COM1 - surface, sq.

EAN 4007841033569

MOTION DETECTOR

Highlights



UV-resistant plastic



Large terminal compartment



Optional remote controls

IS 3360 MX Highbay COM1 - surface, sq.

MOTION DETECTOR

EAN 4007841033569

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

033569

EAN

4007841033569

Typ

IS 3360 MX Highbay COM1 - surface, sq.

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss