

RS PRO P2 S Emergency light - neutral white

neva
lux**SENSOR-SWITCHED LED INDOOR LIGHT**

EAN 4007841058579

320 x 110 mm



RS PRO P2 S Emergency light - neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841058579

Technical Data

IDENTIFICATION	
PU1 EAN	4007841058579
Material number	110081751
SAP designation	LED INNENLEUCHTE RS PRO P2 S NW EM
Product name data sheet	RS PRO P2 S Emergency light - neutral white
Product category	Sensor-switched LED indoor light
Discount group	I
Source	Steinel Excel
Product status	Normal
Manufacturer	Steinel
DIMENSIONS	
Dimensions Ø × H	320 x 110 mm
PU1 net weight	0.654
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Power	15,4 W
LED lamps > 8 W	250 W
Capacitive load in µF	88 µF
Switching output 1 number of LED/fluorescent lamps	50
B10 fuse (pcs)	54
B16 fuse (pcs)	87
C10 fuse (pcs)	90
C16 fuse (pcs)	145
Maximum inrush current	13 A
SENSOR TECHNOLOGY	
Max. mounting height	4,00 m
Sensor technology	High frequency
With motion detector	Yes

Detection angle	360 °
Electronic scalability	Yes
Mechanical scalability	No
Radial range	Ø 8 m (50 m²)
Tangential range	Ø 8 m (50 m²)
Mounting height	2 – 4 m
Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Networking via	Cable
LIGHTING TECHNOLOGY	
Measured luminous flux 360°	1731 lm
Colour temperature	4000 K
With illuminant	Yes, STEINEL LED system
Illuminant	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Luminous flux emergency light	38 lm
Photobiological safety per EN 62471	RG1
LIFETIME	
LED lifetime max. °C	50000 h
LED lifetime L70B50 25°C	> 60000 h
Luminous flux decline per LM80	L80B10
LED lifetime per IEC 62717 L70	100.000 h
LED lifetime per IEC 62717 L80	73.000 h

LED lifetime per IES TM-21 L70	60.000 h
LED lifetime per IES TM-21 L80	60.000 h
SETTINGS	
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Base light function	Yes
Base light function time	10/30 min, all night
Functions	Emergency light in compliance with EN 60598-2-22 for 3h
Base light function in percent	10 %
Base light function percent from	10
Base light function percent to	10
HOUSING & MATERIAL	
Impact resistance	IK03
Protection class (IP)	IP54
Protection class	II
Ambient temperature	from -10 up to 30 °C
Housing material	Plastic
Cover material	Plastic, opal
Mounting location	wall ceiling
Colour	white
Protection class ceiling	IP54
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
CERTIFICATES & EPREL	
Certificates	DEKRA
EPREL category	Surrounded product with integrated light source


RS PRO P2 S Emergency light - neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841058579

Illustrations

TECHNICAL DRAWINGS

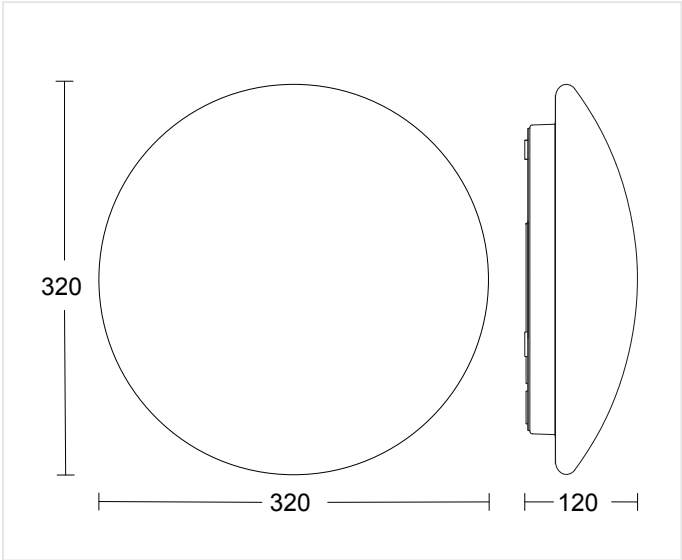

320 x 110 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------


RS PRO P2 S Emergency light - neutral white

EAN 4007841058579

SENSOR-SWITCHED LED INDOOR LIGHT


Wiring Diagrams

WIRING DIAGRAM 1

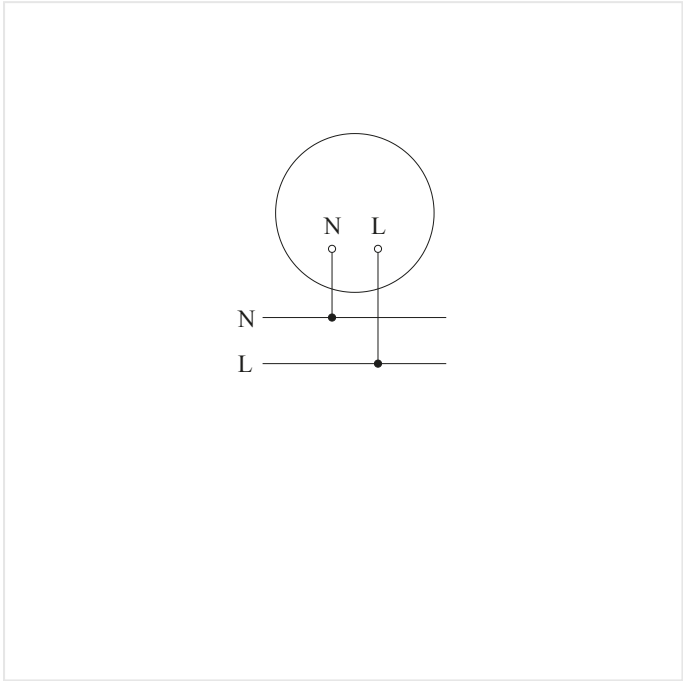

Master circuit diagram

WIRING DIAGRAM 2

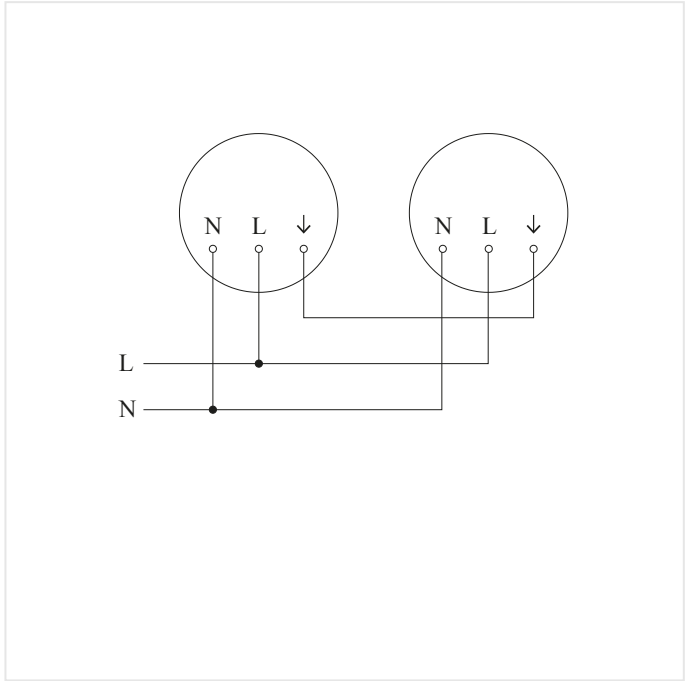

Master/master interconnection circuit diagram

RS PRO P2 S Emergency light - neutral white


EAN 4007841058579

SENSOR-SWITCHED LED INDOOR LIGHT

Highlights



Including STEINEL LED system

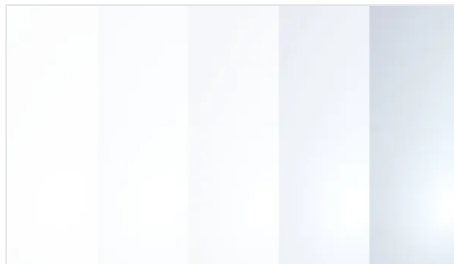

Intelligent soft light start



Interconnectable by cable (maximum of 10 units)



Optional basic lighting level 10 %



Emergency light module in compliance with EN 60598-2-22

RS PRO P2 S Emergency light - neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841058579

Accessories

ORDERING INFORMATION	
Art.-Nr.	058579
EAN	4007841058579
Typ	RS PRO P2 S Emergency light - neutral white
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	