

PD IR 4360-24 KNX - Surface wiring black

neva
lux

MOTION AND PRESENCE DETECTOR

EAN 4007841086107

- Our series for the common ranges
- Presence detector with 24 m motion detection and 7.5 m presence detection for integration into a KNX bus system
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Start of programming mode from a distance via Smart Remote remote control via app
- External approval and measurement in accordance with sensNORM

129 x 70 mm



PD IR 4360-24 KNX - Surface wiring black

MOTION AND PRESENCE DETECTOR

EAN 4007841086107

Technical Data

IDENTIFICATION		Segment-by-segment masking		Yes	Functions		Motions sensor Light sensor
PU1 EAN	4007841086107	Electronic scalability		No			Presence function Presence detector logic
Material number	110092742	Mechanical scalability		No	Settings via		Bus ETS software Smart Remote
SAP designation	PRAESENZMELDER PD IR 4360-24 KNX AP SW	Radial range		Ø 5.5 m (24 m²)	With remote control		No
Version	Motion and Presence Detector	Tangential range		Ø 24 m (452 m²)	Twilight setting teach		Yes
Product name data sheet	PD IR 4360-24 KNX - Surface wiring black	Switching zones		1436 switching zones	HOUSING & MATERIAL		
Product category	Motion and Presence Detector	Mounting height		2 – 10,00 m	Protection class (IP)		IP54
Discount group	PK	Presence range		Ø 7.5 m (44 m²)	Ambient temperature		from -20 up to 50 °C
Source	Steinel Excel	Optimal mounting height		2,8 m	Housing material		Plastic
Product status	Normal	Nevalux sensor technology		KNX	Cover material		Other
Manufacturer	Steinel	CONNECTIVITY			Cover material (scope of delivery)		shrouds
DIMENSIONS		Type of networking		Master/master	Mounting location		ceiling
Dimensions L × W × H	70 x 129 x 129 mm	Networking via		Cable	Application location		Indoors
Dimensions Ø × H	129 x 70 mm	KNX functions		Light level Light output 2x Constant-lighting control Photo-cell controller Basic light level function HVAC output Logic gate Presence output Sabotage protection Day / night function	Mounting type		Surface wiring
PU1 net weight	0.242				Material		Plastic
SENSOR TECHNOLOGY					Application room		one-person office function room / ancillary room Indoors warehouse
Max. mounting height	10,00 m	With bus coupler		Yes	Colour		black
Sensor technology	passive infrared	SETTINGS			RAL colour		9005
With motion detector	Yes	Twilight setting		2 – 800 lx	SCOPE OF DELIVERY & WARRANTY		
Detection angle	360 °	Time setting		10 s – 1092 Min.	Manufacturer warranty		5 years
Sneak-under protection	Yes				Corner wall bracket included		No


PD IR 4360-24 KNX - Surface wiring black

MOTION AND PRESENCE DETECTOR

EAN 4007841086107

Illustrations

TECHNICAL DRAWINGS

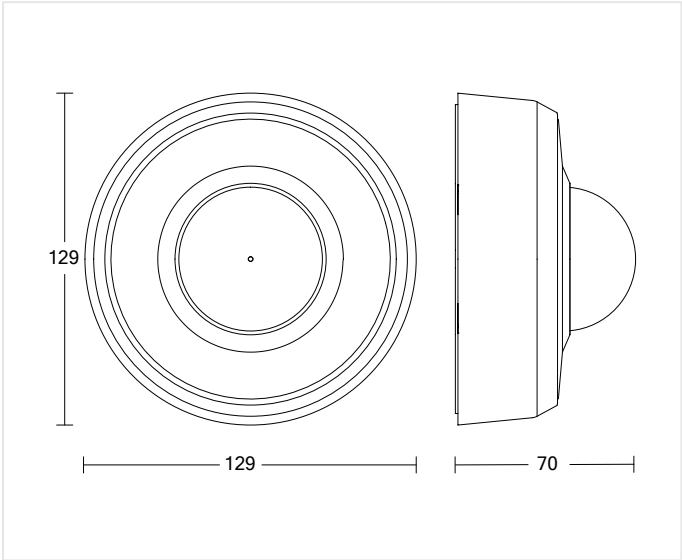

129 x 70 mm

MOUNTING HEIGHT

2 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
------------------------	------------------	----------------

PD IR 4360-24 KNX - Surface wiring black

MOTION AND PRESENCE DETECTOR

EAN 4007841086107

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

086107

EAN

4007841086107

Typ

PD IR 4360-24 KNX - Surface wiring black

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss