

XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841030070

- Spotlight with motion detector and fully swivelling LED panel in elegant opal look, ideal for illuminating larger areas such as driveways, patios or gardens
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Optional corner wall bracket available for reliable and uninterrupted monitoring of an area in front of two house walls
- Warm white light (3000 K) and long-life 19,3 W LEDs with 2124 lm, with an illumination of over 300 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

161 x 180 x 240 mm



XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030070

Technical Data

IDENTIFICATION					
PU1 EAN	4007841030070	Mechanical scalability	No	Time setting	8 s – 35 Min.
Material number	110094570	Radial range	r = 5 m (39 m²)	Base light function	No
SAP designation	LED STRAHLER XLED HOME 2 XL S WS V2	Tangential range	r = 10 m (157 m²)	Settings via	Potentiometers
Product name data sheet	XLED home 2 XL S white	Mounting height	1,8 – 4 m	Twilight setting teach	No
Product category	Sensor-switched LED floodlight	Optimal mounting height	2 m	HOUSING & MATERIAL	
Discount group	SH	CONNECTIVITY		Protection class (IP)	IP44
Source	Steinel Excel	Networking	No	Protection class	II
Product status	Discontinued item	LIGHTING TECHNOLOGY		Ambient temperature	from -20 up to 40 °C
Manufacturer	Steinel	Measured luminous flux 360°	2124 lm	Housing material	Plastic
DIMENSIONS		Colour temperature	3000 K	Cover material	Plastic, opal
Dimensions L x W x H	161 x 180 x 240 mm	LED colour deviation	SDCM3	Cover material (scope of delivery)	sticker
PU1 net weight	0.614	Colour rendering index	80-89	Mounting location	wall corner
ELECTRICAL		With illuminant	Yes, STEINEL LED system	Application location	Outdoors
Mains connection	220 – 240 V / 50 – 60 Hz	Illuminant	LED cannot be replaced	Mounting type	Surface wiring
Power	19,3 W	Base	without	Application room	outdoors all round the building terrace / balcony courtyard & driveway
SENSOR TECHNOLOGY		LED cooling system	HCMC (High Conductive Magnesium Composite)	Colour	white
Max. mounting height	4,00 m	Photobiological safety per EN 62471	Sonstige	SCOPE OF DELIVERY & WARRANTY	
Sensor technology	passive infrared	LIFETIME		Manufacturer warranty	5 years
With motion detector	Yes	LED lifetime max. °C	50000 h	CERTIFICATES & EPREL	
Detection angle	180 °	Luminous flux decline per LM80	L70B10	EPREL energy efficiency class	E
Sneak-under protection	Yes	SETTINGS		EPREL category	Light source
Segment-by-segment masking	Yes	Twilight switch	Yes		
Electronic scalability	No	Twilight setting	2 – 2000 lx		


XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030070

Illustrations

TECHNICAL DRAWINGS

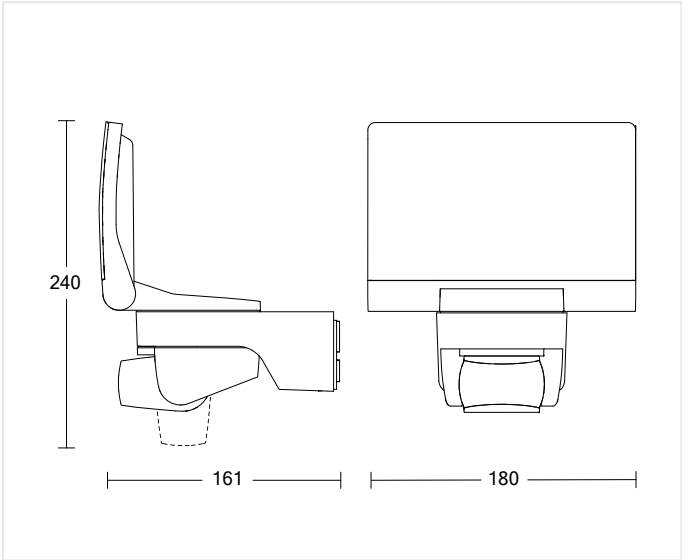

161 x 180 x 240 mm

MOUNTING HEIGHT

1,8 – 4 m BEREICH	2 m OPTIMAL	4,00 m MAX
----------------------	----------------	---------------


XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030070

Wiring Diagrams

WIRING DIAGRAM 1

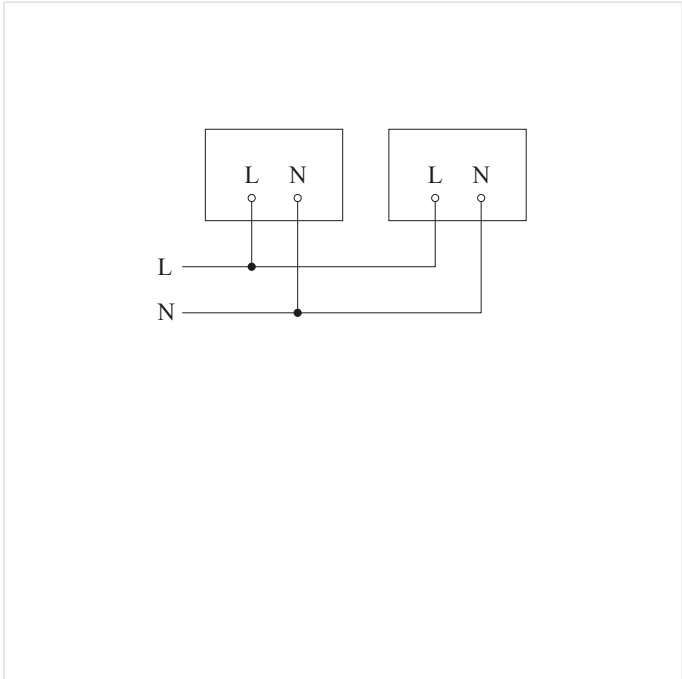


Circuit diagram

XLED home 2 XL S white

EAN 4007841030070

SENSOR-SWITCHED LED FLOODLIGHT

Highlights

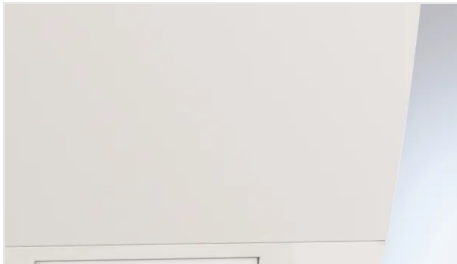


Including STEINEL LED system



HCMC cooling system



UV-resistant plastic

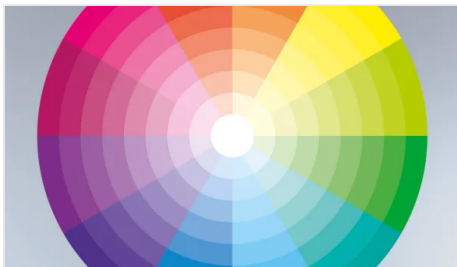

Colour rendering index Ra ≥ 80



Optional corner wall mount bracket

XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030070

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841055615	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse weiss	Accessory
 4007841053086	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse graphit	Accessory
 4007841055875	Eckwandhalter XLED Home 2/ Protect/ Pro 240 schwarz	Accessory
 4007841053109	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse silber	Accessory

ORDERING INFORMATION

Art.-Nr.

030070

EAN

4007841030070

Typ

XLED home 2 XL S white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss