

PD IR 4360-24 KNX - in-ceiling installation, white

neva
lux

MOTION AND PRESENCE DETECTOR

EAN 4007841086138

- Our series for the common ranges
- Presence detector with 24 m motion detection and 7.5 m presence detection for integration into a KNX bus system
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Start of programming mode from a distance via Smart Remote remote control via app
- External approval and measurement in accordance with sensNORM

109 x 114 mm



PD IR 4360-24 KNX - in-ceiling installation, white

MOTION AND PRESENCE DETECTOR

EAN 4007841086138

Technical Data

IDENTIFICATION		Segment-by-segment masking	Yes	Functions	Motions sensor Light sensor
PU1 EAN	4007841086138	Electronic scalability	No		Presence function Presence detector logic
Material number	110092753	Mechanical scalability	No	Settings via	Bus ETS software Smart Remote
SAP designation	PRAESENZMELDER PD IR 4360-24 KNX DE WS	Radial range	Ø 5.5 m (24 m²)	With remote control	No
Version	Motion and Presence Detector	Tangential range	Ø 24 m (452 m²)	Twilight setting teach	Yes
Product name data sheet	PD IR 4360-24 KNX - in-ceiling installation, white	Switching zones	1436 switching zones	HOUSING & MATERIAL	
Product category	Motion and Presence Detector	Mounting height	2 – 10,00 m	Protection class (IP)	IP20
Discount group	PK	Presence range	Ø 7.5 m (44 m²)	Ambient temperature	from -20 up to 50 °C
Source	Steinel Excel	Optimal mounting height	2,8 m	Housing material	Plastic
Product status	Normal	Nevalux sensor technology	KNX	Cover material	Other
Manufacturer	Steinel	CONNECTIVITY		Cover material (scope of delivery)	shrouds
DIMENSIONS		Type of networking	Master/master	Mounting location	ceiling
Dimensions L × W × H	114 x 109 x 109 mm	Networking via	Cable	Application location	Indoors
Dimensions Ø × H	109 x 114 mm	KNX functions	Light level Light output 2x Constant-lighting control Photo-cell controller Basic light level function HVAC output Logic gate Presence output Sabotage protection Day / night function	Mounting type	In-ceiling installation
PU1 net weight	0.197			Material	Plastic
SENSOR TECHNOLOGY				Application room	one-person office function room / ancillary room Indoors warehouse
Max. mounting height	10,00 m	With bus coupler	Yes	Colour	white
Sensor technology	passive infrared	SETTINGS		RAL colour	9010
With motion detector	Yes	Twilight setting	2 – 800 lx	SCOPE OF DELIVERY & WARRANTY	
Detection angle	360 °	Time setting	10 s – 1092 Min.	Manufacturer warranty	5 years
Sneak-under protection	Yes			Corner wall bracket included	No


PD IR 4360-24 KNX - in-ceiling installation, white

MOTION AND PRESENCE DETECTOR

EAN 4007841086138

Illustrations

TECHNICAL DRAWINGS

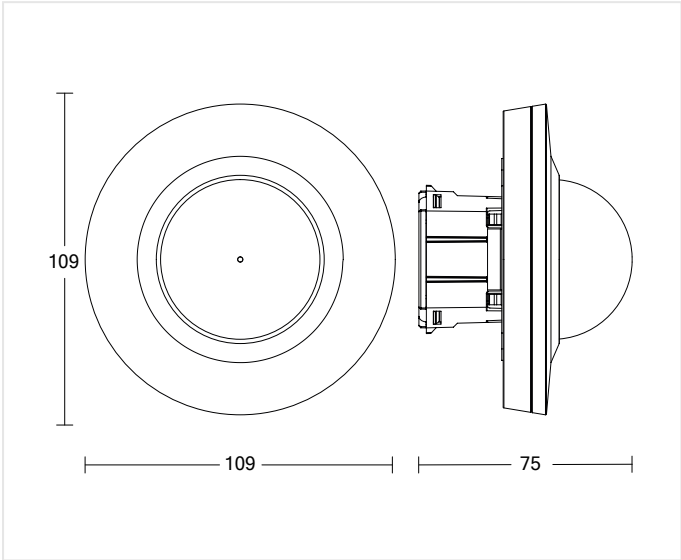

109 x 114 mm

MOUNTING HEIGHT

2 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
------------------------	------------------	----------------

PD IR 4360-24 KNX - in-ceiling installation, white

MOTION AND PRESENCE DETECTOR

EAN 4007841086138

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

086138

EAN

4007841086138

Typ

PD IR 4360-24 KNX - in-ceiling installation, white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss