

# IS 3360 40m KNX - concealed, sq. black

neva  
lux

PRESENCE DETECTOR

EAN 4007841068578

78 x 94 x 94 mm



IS 3360 40m KNX - concealed, sq. black

PRESENCE DETECTOR

EAN 4007841068578

Technical Data

| IDENTIFICATION          |                                          |                            |                                                                                                                                                                    |                              |                                                                                                                                                                                                   |
|-------------------------|------------------------------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PU1 EAN                 | 4007841068578                            | Segment-by-segment masking | Yes                                                                                                                                                                | Twilight setting             | 2 – 1000 lx                                                                                                                                                                                       |
| Material number         | 110078859                                | Electronic scalability     | No                                                                                                                                                                 | Time setting                 | 5 s – 15 Min.                                                                                                                                                                                     |
| SAP designation         | BEWEGUNGSMELDER IS 3360-E KNX V3.1 UP SW | Mechanical scalability     | No                                                                                                                                                                 | Base light function          | Yes                                                                                                                                                                                               |
| Version                 | Motion and Presence Detector             | Radial range               | Ø 8 m (50 m²)                                                                                                                                                      | Main light adjustable        | 0 - 100 %                                                                                                                                                                                         |
| Product name data sheet | IS 3360 40m KNX - concealed, sq. black   | Tangential range           | Ø 40 m (1257 m²)                                                                                                                                                   | Settings via                 | ETS software Remote control<br>Bus Smart Remote                                                                                                                                                   |
| Product category        | Presence detector                        | Switching zones            | 1416 switching zones                                                                                                                                               | Twilight setting teach       | Yes                                                                                                                                                                                               |
| Discount group          | BK                                       | Mounting height            | 2,50 – 4,00 m                                                                                                                                                      | HOUSING & MATERIAL           |                                                                                                                                                                                                   |
| Source                  | Steinel Excel                            | Presence range             | Ø 3 m (7 m²)                                                                                                                                                       | Protection class (IP)        | IP20                                                                                                                                                                                              |
| Product status          | Normal                                   | Optimal mounting height    | 2,8 m                                                                                                                                                              | Ambient temperature          | from -20 up to 50 °C                                                                                                                                                                              |
| Manufacturer            | Steinel                                  | Nevalux sensor technology  | KNX                                                                                                                                                                | Mounting location            | ceiling                                                                                                                                                                                           |
| DIMENSIONS              |                                          | CONNECTIVITY               |                                                                                                                                                                    | Application location         | Indoors                                                                                                                                                                                           |
| Dimensions L x W x H    | 78 x 94 x 94 mm                          | Networking                 | Yes                                                                                                                                                                | Mounting type                | Concealed wiring                                                                                                                                                                                  |
| PU1 net weight          | 0.133                                    | Type of networking         | Master/slave                                                                                                                                                       | Material                     | Plastic                                                                                                                                                                                           |
| ELECTRICAL              |                                          | Networking via             | KNX bus                                                                                                                                                            | Application room             | production facilities<br>recreation room changing room function room / ancillary room sports hall reception / lobby stairwell WC / washroom multi-storey / underground car park warehouse Indoors |
| Supply voltage detail   | KNX bus                                  | KNX functions              | Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 2x Presence output Day / night function Logic gate | Colour                       | black                                                                                                                                                                                             |
| SENSOR TECHNOLOGY       |                                          | With bus coupler           | Yes                                                                                                                                                                | RAL colour                   | 9005                                                                                                                                                                                              |
| Max. mounting height    | 4,00 m                                   | LIGHTING TECHNOLOGY        |                                                                                                                                                                    | SCOPE OF DELIVERY & WARRANTY |                                                                                                                                                                                                   |
| Sensor technology       | passive infrared                         | Continuous light           | selectable                                                                                                                                                         | Manufacturer warranty        | 5 years                                                                                                                                                                                           |
| With motion detector    | Yes                                      | Constant light regulation  | Yes                                                                                                                                                                | Corner wall bracket included | No                                                                                                                                                                                                |
| Detection angle         | 360 °                                    | SETTINGS                   |                                                                                                                                                                    |                              |                                                                                                                                                                                                   |
| Opening angle           | 180 °                                    | Twilight switch            | Yes                                                                                                                                                                |                              |                                                                                                                                                                                                   |
| Sneak-under protection  | Yes                                      |                            |                                                                                                                                                                    |                              |                                                                                                                                                                                                   |


IS 3360 40m KNX - concealed, sq. black

PRESENCE DETECTOR

EAN 4007841068578

Illustrations

TECHNICAL DRAWINGS

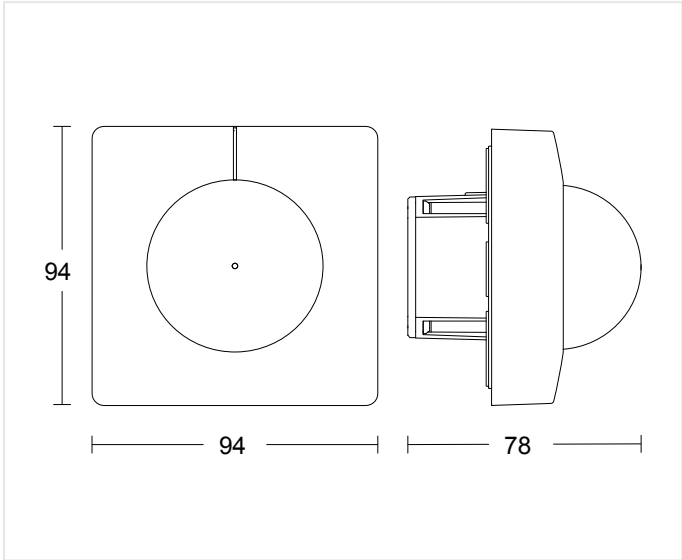

78 x 94 x 94 mm

MOUNTING HEIGHT

|                          |                  |               |
|--------------------------|------------------|---------------|
| 2,50 – 4,00 m<br>BEREICH | 2,8 m<br>OPTIMAL | 4,00 m<br>MAX |
|--------------------------|------------------|---------------|

# IS 3360 40m KNX - concealed, sq. black

EAN 4007841068578

PRESENCE DETECTOR

## Highlights



UV-resistant plastic



Optional remote controls




Smart Remote remote control optional

IS 3360 40m KNX - concealed, sq. black

PRESENCE DETECTOR

EAN 4007841068578

Accessories

| ARTICLE NUMBER                                                                                   | DESCRIPTION                                     | CATEGORY  |
|--------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------|
|  4007841593018   | Service Fernbedienung RC6 KNX                   | Other     |
|  4007841592912   | Nutzer Fernbedienung RC7 KNX                    | Accessory |
|  4007841009151   | Smart Remote                                    | Accessory |
|  4007841056728  | Schwarze Blende für IR-Sensoren Unterputz eckig | Accessory |
|  4007841056742 | Schwarze Blende für IR-Sensoren Unterputz rund  | Accessory |

ORDERING INFORMATION

Art.-Nr.

068578

EAN

4007841068578

Typ

IS 3360 40m KNX - concealed, sq. black

nevalux

nevalux AG  
Neugrütstrasse 2  
8610 Uster  
+41 44 508 78 78  
info@nevalux.swiss