

RS PRO R20 plus SC Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841067724

350 x 55 mm




RS PRO R20 plus SC Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841067724

Illustrations

TECHNICAL DRAWINGS

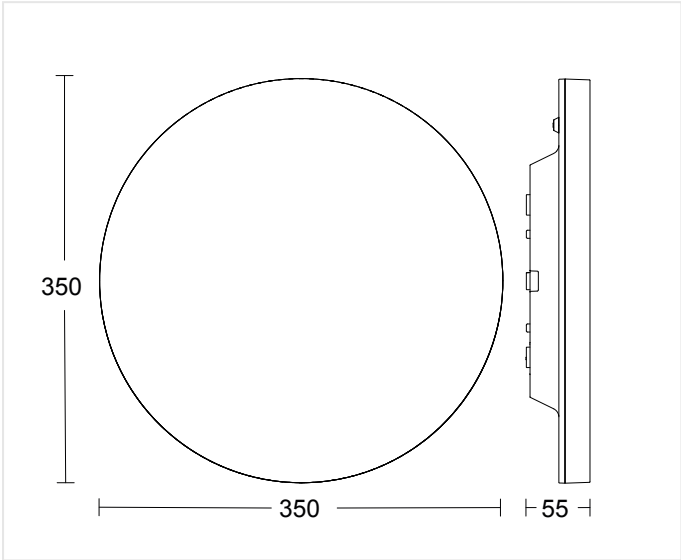

350 x 55 mm

MOUNTING HEIGHT


2,00 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

RS PRO R20 plus SC Neutral white


EAN 4007841067724

SENSOR-SWITCHED LED INDOOR LIGHT

Wiring Diagrams

WIRING DIAGRAM 1

Slave/wireless master interconnection circuit diagram

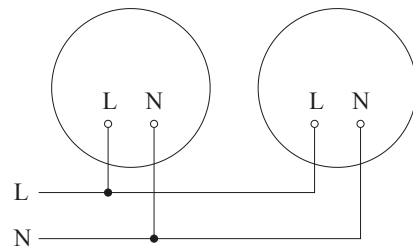WIRING DIAGRAM 2

Master/master interconnection circuit diagram

RS PRO R20 plus SC Neutral white


EAN 4007841067724

SENSOR-SWITCHED LED INDOOR LIGHT

Highlights



Including STEINEL LED system

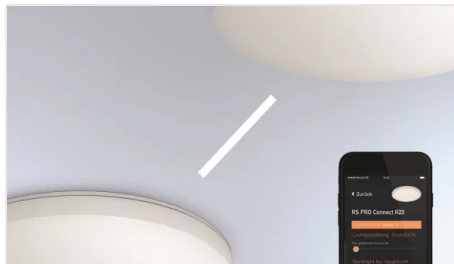

Interconnectable and adjustable via Bluetooth



Impact-resistant material rated to IK07



Backlight function




Optional basic lighting level 10 - 50 %



Optional main light brightness 50 - 100%



Optional emergency light

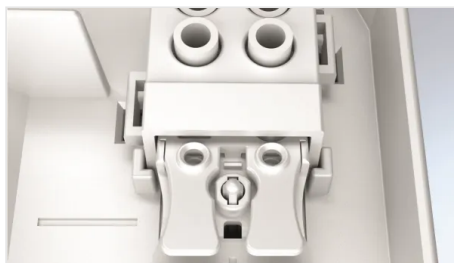

Modern plug-in terminals for straightforward installation

RS PRO R20 plus SC Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841067724

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841064143	Notlicht-Modul R-Serie	Accessory
 4007841087234	Adapter R-Serie für Notlichtweiche	Accessory
 4007841084653	Funktaster PB2-Bluetooth	System components
 4007841084660	Funktaster PB4-Bluetooth	System components
 221386	Universal P-Set 3S	Suspension cable
 4007841067335	Relais REL5A-Bluetooth	System components
 4007841067342	Tasterkoppler PC4-Bluetooth	System components

ORDERING INFORMATION

Art.-Nr.

067724

EAN

4007841067724

Typ

RS PRO R20 plus SC Neutral white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss