


anele C620

ANELE CONNECT

neva
lux

620 x 620 x 8.5 mm (Einbautiefe: 40 mm)

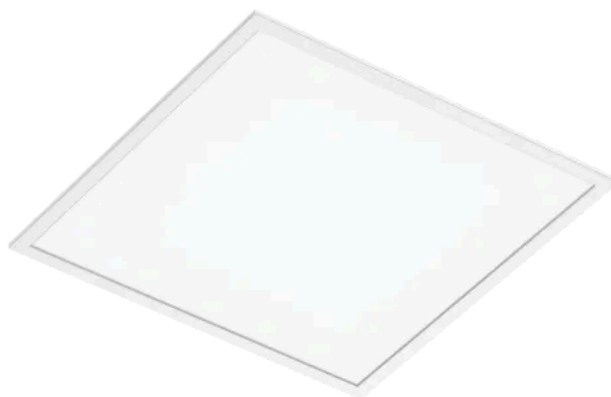

anele C620

ANELE CONNECT

Technical Data

IDENTIFICATION		With light sensor		No	With emergency light		No
Source	woocommerce	LIGHTING TECHNOLOGY			Suitable for light band configuration		No
Product status	Normal	Colour temperature		4000 K	HOUSING & MATERIAL		
Manufacturer	Nevalux	LED colour deviation		SDCM3	Protection class (IP)		IP20
DIMENSIONS		Colour rendering index		80-89	Protection class		I
Dimensions L x W x H	620 x 620 x 8.5 mm (Einbautiefe: 40 mm)	Illuminant		LED	Ambient temperature		-20...45 °C
ELECTRICAL		Luminous flux		3960 lm	Housing material		Aluminum
Mains connection	200...240 V / 50 – 60 Hz	Beam angle		90°	Cover material		Microprismatic acrylic glass
Power	33 W	Luminaire luminous efficacy		120 lm/W	Mounting type		In-ceiling installation
Replaceable driver	Yes	Glare value		UGR < 19	Colour		White
Type of wiring	Suitable for through wiring	LIFETIME			SCOPE OF DELIVERY & WARRANTY		
SENSOR TECHNOLOGY		LED lifespan (25 °C)		50000 h	Manufacturer warranty		5 years
With motion detector	No	SETTINGS			CERTIFICATES & EPREL		
Nevalux sensor technology	DALI 2	DALI dimming		Yes	EPREL energy efficiency class		E

anele C620

ANELE CONNECT

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221638	anele APG 595	Installation housing
 221639	anele APG 620	Installation housing
 221640	anele DEF	Mounting kit
 221641	anele P-Set	Suspension cable
 220721	Emergency Package 1h (50V/2.5W/Box)	Emergency lighting

ORDERING INFORMATION

Art.-Nr.

221637

Typ

anele C620

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss