

XLED home 2 SC white

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841065454

- Spotlight with motion detector and fully swivelling LED panel in noble opal look
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Wireless networking via Bluetooth and easy setting via STEINEL Connect App
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Functions: night saving mode and timer
- Warm white light (3000 K) and long-life 13,8 W LEDs with 1550 lm, with an illumination of max. 150 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

161 x 180 x 218 mm



XLED home 2 SC white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841065454

Technical Data

IDENTIFICATION		Tangential range		r = 10 m (157 m²)		Functions		Group parameterisation	
PU1 EAN		4007841065454		Mounting height		1,8 – 4 m		Manual ON / ON-OFF	
Material number		110082216		Optimal mounting height		2 m		Neighbouring group function	
SAP designation		LED STRAHLER XLED HOME 2 SC WS		Nevalux sensor technology		BT SIG Mesh, On / Off		Master/slave override Night economy mode Timer	
Product name data sheet		XLED home 2 SC white		CONNECTIVITY		Settings via		Bluetooth	
Product category		Sensor-switched LED floodlight		Networking		Twilight setting teach		Yes	
Discount group		SCH		Type of networking		Master/master Master/slave		HOUSING & MATERIAL	
Source		Steinel Excel		Networking via		Bluetooth		Impact resistance	
Product status		Normal		LIGHTING TECHNOLOGY		Protection class (IP)		IP44	
Manufacturer		Steinel		Measured luminous flux 360°		Protection class		II	
DIMENSIONS		Dimensions L x W x H		Colour temperature		Ambient temperature		from -20 up to 40 °C	
PU1 net weight		0.576		LED colour deviation		Housing material		HCMC	
ELECTRICAL		Mains connection		Colour rendering index		Cover material		Plastic, opal	
Power		13,8 W		With illuminant		Mounting location		wall corner	
SENSOR TECHNOLOGY		Max. mounting height		Illuminant		Application location		Outdoors	
Sensor technology		passive infrared		Base		Mounting type		Surface wiring	
With motion detector		Yes		LED cooling system		Application room		outdoors all round the building terrace / balcony courtyard & driveway	
Detection angle		180 °		Soft light start		Colour		white	
Opening angle		90 °		Continuous light		SCOPE OF DELIVERY & WARRANTY		Manufacturer warranty	
Sneak-under protection		Yes		SETTINGS		Corner wall bracket included		5 years	
Segment-by-segment masking		Yes		Twilight switch		CERTIFICATES & EPREL		EPREL energy efficiency class	
Radial range		r = 5 m (39 m²)		Twilight setting		EPREL category		Light source	
				Time setting					
				Base light function					
				Main light adjustable					


XLED home 2 SC white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841065454

Illustrations

TECHNICAL DRAWINGS

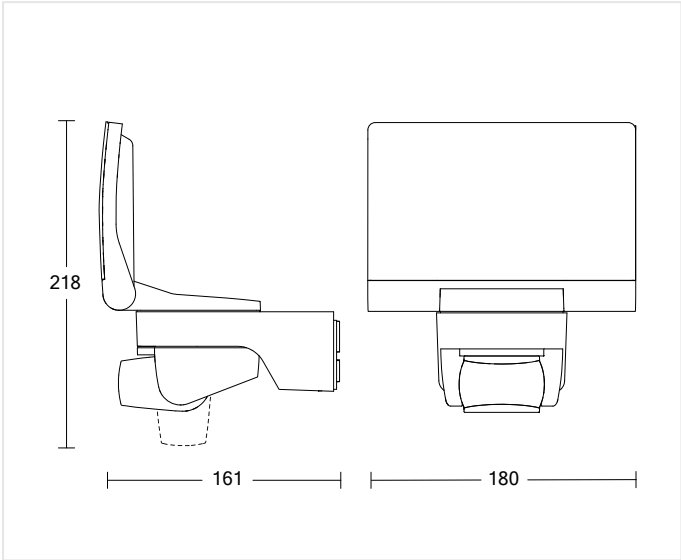

161 x 180 x 218 mm

MOUNTING HEIGHT

1,8 – 4 m BEREICH	2 m OPTIMAL	4,00 m MAX
---	-----------------------------------	----------------------------------


XLED home 2 SC white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841065454

Wiring Diagrams

WIRING DIAGRAM 1

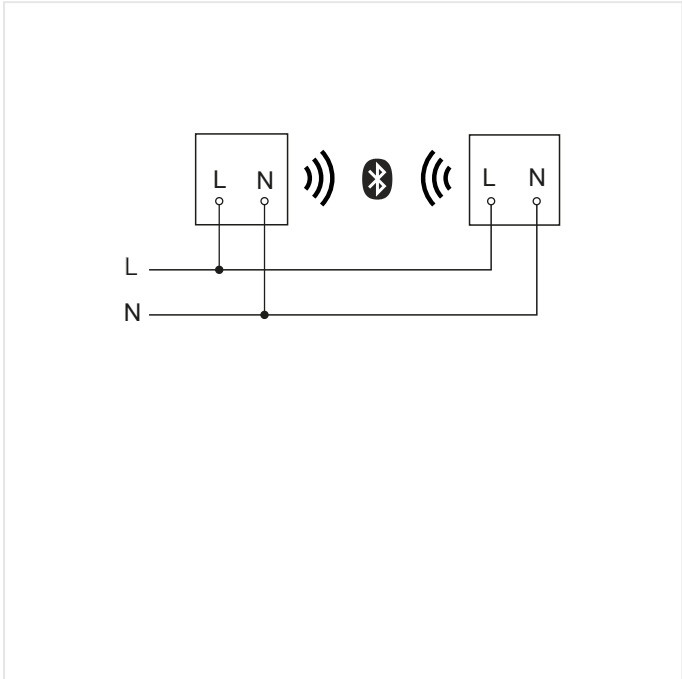


Master/master interconnection circuit diagram

XLED home 2 SC white

EAN 4007841065454

SENSOR-SWITCHED LED FLOODLIGHT

Highlights

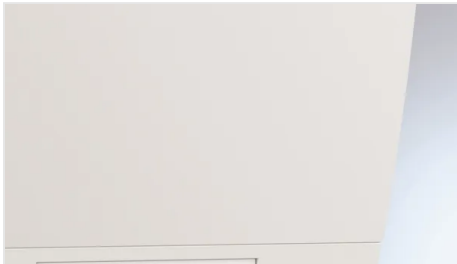


Including STEINEL LED system



HCMC cooling system



UV-resistant plastic

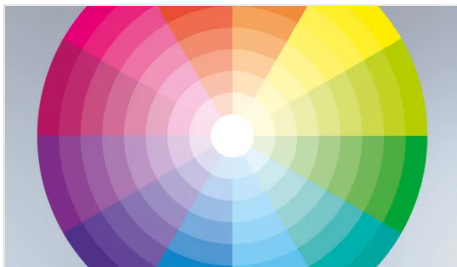

Colour rendering index $R_a \geq 80$

XLED home 2 SC white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841065454

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841088620	Funkschalter TapDuo C	System components
 4007841055875	Eckwandhalter XLED Home 2/ Protect/ Pro 240 schwarz	Accessory
 4007841053086	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse graphit	Accessory
 4007841055615	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse weiss	Accessory

ORDERING INFORMATION

Art.-Nr.

065454

EAN

4007841065454

Typ

XLED home 2 SC white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss