

IS 3360 DALI-2 Input Device - surface, rd.

neva
lux**PRESENCE DETECTOR**

EAN 4007841057251

126 x 65 mm



IS 3360 DALI-2 Input Device - surface, rd.

PRESENCE DETECTOR

EAN 4007841057251

Technical Data

IDENTIFICATION		SENSOR TECHNOLOGY		SETTINGS	
PU1 EAN	4007841057251	Max. mounting height	4,00 m	Twilight switch	Yes
Material number	110061476	Sensor technology	passive infrared	Twilight setting	2 – 1000 lx
SAP designation	BEWEGUNGSMELDER IS 3360-R DALI2 AP WS	With motion detector	Yes	Base light function	No
Version	Motion and Presence Detector	Detection angle	360 °	Main light adjustable	No
Product name data sheet	IS 3360 DALI-2 Input Device - surface, rd.	Opening angle	180 °	Settings via	Bus
Product category	Presence detector	Sneak-under protection	Yes	With remote control	No
Discount group	B	Segment-by-segment masking	Yes	Twilight setting teach	No
Source	Steinel Excel	Electronic scalability	No	HOUSING & MATERIAL	
Product status	Normal	Mechanical scalability	No	Protection class (IP)	IP54
Manufacturer	Steinel	Radial range	Ø 8 m (50 m²)	Ambient temperature	from -20 up to 50 °C
DIMENSIONS		Tangential range	Ø 40 m (1257 m²)	Mounting location	ceiling
Dimensions L x W x H	65 x 95 x 95 mm	Switching zones	1416 switching zones	Application location	Outdoors Indoors
Dimensions Ø x H	126 x 65 mm	Mounting height	2,5 – 4,00 m	Mounting type	Surface wiring
PU1 net weight	0.16	Presence range	Ø 3 m (7 m²)	Material	Plastic
ELECTRICAL		Optimal mounting height	2,8 m	Application room	production facilities recreation room changing room function room / ancillary room sports hall reception / lobby stairwell WC / washroom multi-storey / underground car park outdoors warehouse Indoors
Mains connection	12 – 22,5 V / 50 – 60 Hz	Nevalux sensor technology	DALI 2	Colour	white
Supply voltage detail	DALI bus	CONNECTIVITY		RAL colour	9003
Switching output 1 potential-free	No	Networking	Yes	SCOPE OF DELIVERY & WARRANTY	
Control output DALI	Addressable/slave	Type of networking	Master/slave	Manufacturer warranty	5 years
Max. current consumption per IEC 62386-101	24 mA	Networking via	DALI bus	Corner wall bracket included	No
Typical current consumption at 16 V input voltage	5 mA	Number of DALI participants	3	CERTIFICATES & EPREL	
Max. current consumption at 10 V input voltage in regular operation	7 mA	With bus coupler	Yes	Certificates	DALI-2
		LIGHTING TECHNOLOGY			
		Soft light start	No		
		Constant light regulation	No		


IS 3360 DALI-2 Input Device - surface, rd.

PRESENCE DETECTOR

EAN 4007841057251

Illustrations

TECHNICAL DRAWINGS

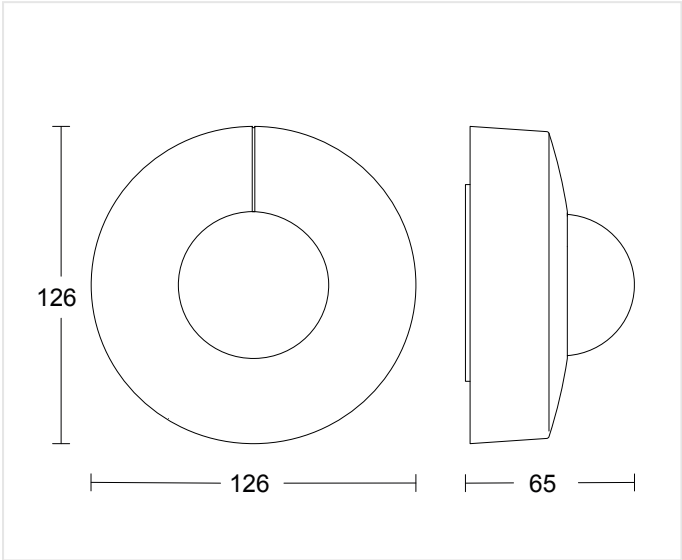

126 x 65 mm

MOUNTING HEIGHT

2,5 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
-------------------------	------------------	---------------

IS 3360 DALI-2 Input Device - surface, rd.

PRESENCE DETECTOR

EAN 4007841057251

Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram

IS 3360 DALI-2 Input Device - surface, rd.

EAN 4007841057251

PRESENCE DETECTOR

Highlights



UV-resistant plastic



Large terminal compartment

IS 3360 DALI-2 Input Device - surface, rd.

PRESENCE DETECTOR

EAN 4007841057251

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

057251

EAN

4007841057251

Typ

IS 3360 DALI-2 Input Device - surface, rd.

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss