

IS 3360 DALI-2 APC - surface, sq.

PRESENCE DETECTOR

neva
lux

EAN 4007841010560

65 x 95 x 95 mm



IS 3360 DALI-2 APC - surface, sq.

PRESENCE DETECTOR

EAN 4007841010560

Technical Data

IDENTIFICATION		Mechanical scalability		No	With remote control		No
PU1 EAN	4007841010560	Radial range	Ø 8 m (50 m²)		Twilight setting teach		Yes
Material number	110038923	Tangential range	Ø 40 m (1257 m²)		Base light function in percent	10 – 50 %	
SAP designation	BEWEGUNGSMELDER IS 3360-E DALI AP WS	Switching zones	1416 switching zones		Base light function percent from	10	
Version	Motion and Presence Detector	Mounting height	2,50 – 4,00 m		Base light function percent to	50	
Product name data sheet	IS 3360 DALI-2 APC - surface, sq.	Presence range	Ø 3 m (7 m²)		HOUSING & MATERIAL		
Product category	Presence detector	Optimal mounting height	2,8 m		Protection class (IP)	IP54	
Discount group	B	Nevalux sensor technology	DALI 2		Ambient temperature	from -20 up to 50 °C	
Source	Steinel Excel	CONNECTIVITY			Mounting location	ceiling	
Product status	Normal	Networking	Yes		Application location	Outdoors Indoors	
Manufacturer	Steinel	Type of networking	Master/slave		Mounting type	Surface wiring	
DIMENSIONS		Networking via	Cable		Material	Plastic	
Dimensions L x W x H	65 x 95 x 95 mm	LIGHTING TECHNOLOGY			Application room	production facilities recreation room changing room function room / ancillary room sports hall reception / lobby stairwell WC / washroom multi-storey / underground car park outdoors warehouse Indoors	
PU1 net weight	0.164	Soft light start	Yes		Colour	white	
ELECTRICAL		Continuous light	selectable, 4h		RAL colour	9003	
Mains connection	220 – 240 V / 50 – 60 Hz	Constant light regulation	Yes		SCOPE OF DELIVERY & WARRANTY		
Control output DALI	Broadcast 1x30 electronic ballasts	SETTINGS			Manufacturer warranty	5 years	
SENSOR TECHNOLOGY		Twilight switch	Yes		Corner wall bracket included	No	
Max. mounting height	4,00 m	Twilight setting	2 – 1000 lx		CERTIFICATES & EPREL		
Sensor technology	passive infrared	Time setting	5 s – 15 Min.		Certificates	DALI-2	
Detection angle	360 °	Base light function	Yes				
Opening angle	180 °	Base light function time	1-30 min all night				
Sneak-under protection	Yes	Main light adjustable	50 - 100 %				
Segment-by-segment masking	Yes	Functions	Normal / test mode Manual ON / ON-OFF Constant-lighting control ON-OFF				
Electronic scalability	No	Settings via	Remote control Potentiometers Smart Remote				


IS 3360 DALI-2 APC - surface, sq.

PRESENCE DETECTOR

EAN 4007841010560

Illustrations

TECHNICAL DRAWINGS

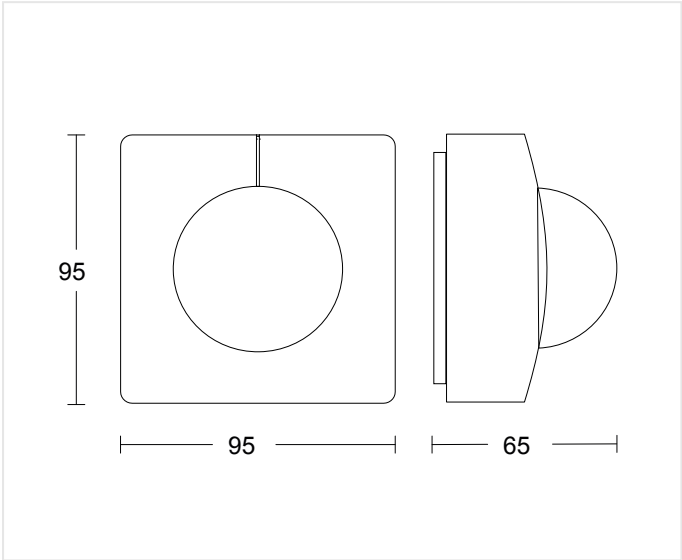

65 x 95 x 95 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


IS 3360 DALI-2 APC - surface, sq.

PRESENCE DETECTOR

EAN 4007841010560


Wiring Diagrams

WIRING DIAGRAM 1

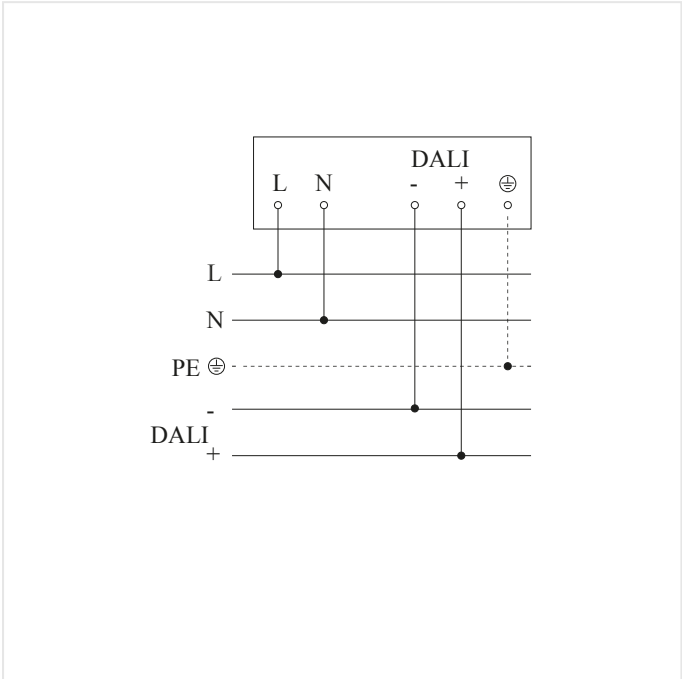

Master circuit diagram

WIRING DIAGRAM 2

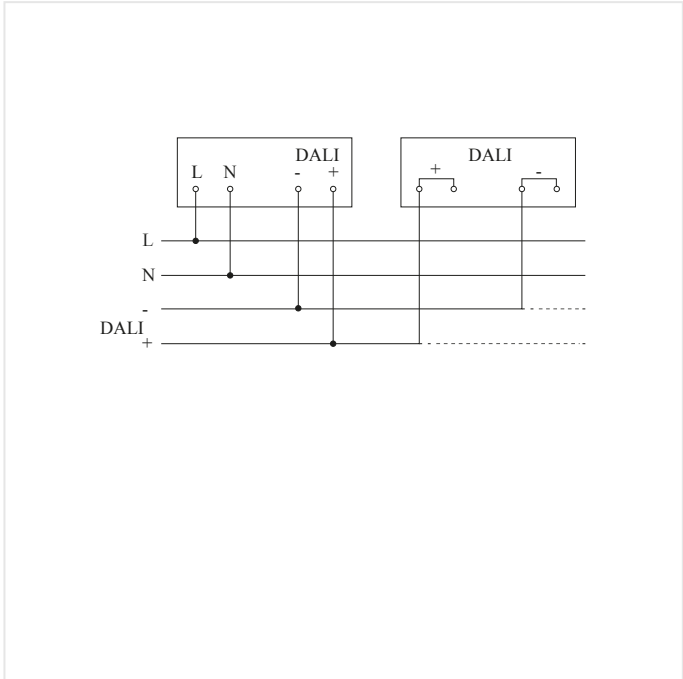

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

IS 3360 DALI-2 APC - surface, sq.


EAN 4007841010560

PRESENCE DETECTOR

Highlights



UV-resistant plastic

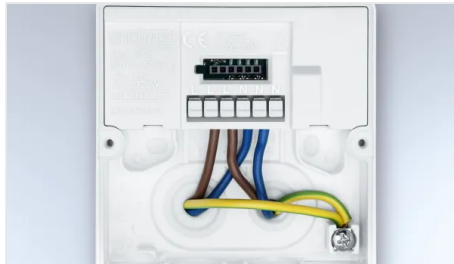

Large terminal compartment



Optional remote controls

IS 3360 DALI-2 APC - surface, sq.

PRESENCE DETECTOR

EAN 4007841010560

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory

ORDERING INFORMATION

Art.-Nr.

010560

EAN

4007841010560

Typ

IS 3360 DALI-2 APC - surface, sq.

neva
lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss