


# zwena connect HF C600 3K

ZWENA CONNECT C

**neva**  
**lux**

600 x 82 mm

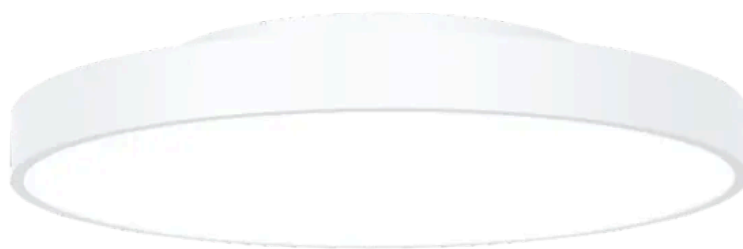

# zwena connect HF C600 3K

ZWENA CONNECT C

## Technical Data

| IDENTIFICATION       |                             | Nevalux sensor technology   |  | Smartlink, BT SIG Mesh       | With emergency light                          |  | No                             |
|----------------------|-----------------------------|-----------------------------|--|------------------------------|-----------------------------------------------|--|--------------------------------|
| Source               | woocommerce                 | With light sensor           |  | Yes                          | Direct/indirect ratio separately controllable |  | No                             |
| Product status       | Normal                      | CONNECTIVITY                |  |                              | With program-controlled lighting control      |  | Yes                            |
| Manufacturer         | Nevalux                     | With radio network control  |  | Yes                          | Constant light output control                 |  | Yes                            |
| DIMENSIONS           |                             | LIGHTING TECHNOLOGY         |  |                              | HOUSING & MATERIAL                            |  |                                |
| Dimensions Ø × H     | 600 x 82 mm                 | Colour temperature          |  | 3000 K                       | Protection class (IP)                         |  | IP20                           |
| ELECTRICAL           |                             | LED colour deviation        |  | SDCM3                        | Protection class                              |  | I                              |
| Mains connection     | 200...240 V / 50 – 60 Hz    | Colour rendering index      |  | 80-89                        | Ambient temperature                           |  | -20...45 °C                    |
| Power                | 48 W                        | Illuminant                  |  | LED                          | Housing material                              |  | Aluminum                       |
| Replaceable driver   | Yes                         | Luminous flux               |  | 5250 lm (Down 3500, Up 1750) | Cover material                                |  | Microprismatic acrylic glass   |
| Type of wiring       | Suitable for through wiring | Beam angle                  |  | Down 95°, Up 100°            | Mounting type                                 |  | Ceiling / wall surface-mounted |
| LED rated current    | 1300 mA                     | Luminaire luminous efficacy |  | 109 lm/W                     | Colour                                        |  | White                          |
| SENSOR TECHNOLOGY    |                             | Glare value                 |  | UGR < 18                     | SCOPE OF DELIVERY & WARRANTY                  |  |                                |
| Sensor technology    | High frequency              | LIFETIME                    |  |                              | Manufacturer warranty                         |  | 5 years                        |
| With motion detector | Yes                         | LED lifespan (25 °C)        |  | 50000 h                      | CERTIFICATES & EPREL                          |  |                                |
| Detection angle      | 360°                        | SETTINGS                    |  |                              | EPREL energy efficiency class                 |  | E                              |
| Radial range         | Ø 8 m (50 m²)               | DALI dimming                |  | Yes                          |                                               |  |                                |
| Tangential range     | Ø 8 m (50 m²)               |                             |  |                              |                                               |  |                                |
| Mounting height      | < 4 m                       |                             |  |                              |                                               |  |                                |

# zwena connect HF C600 3K

ZWENA CONNECT C

## Illustrations


### MOUNTING HEIGHT

|                                        |
|----------------------------------------|
| <div>&lt; 4 m</div> <div>BEREICH</div> |
|----------------------------------------|

# zwena connect HF C600 3K

ZWENA CONNECT C

## Accessories

| ARTICLE NUMBER                                                                            | DESCRIPTION                                 | CATEGORY             |
|-------------------------------------------------------------------------------------------|---------------------------------------------|----------------------|
|  221618   | Emergency Package 1h (50V/3.5W)             | Emergency lighting   |
|  221570   | Connect TK2 BLM                             | Pushbutton interface |
|  221591   | Smartlink T-Board PB4                       | Wireless push-button |
|  221970  | Bluetooth EDIZIO.liv SNAPFIX Low Energy PB2 | Wireless push-button |
|  221971 | Bluetooth EDIZIO.liv SNAPFIX Low Energy PB4 | Wireless push-button |

ORDERING INFORMATION

Art.-Nr.

222051

Typ

zwena connect HF C600 3K

neva  
lux

nevalux AG  
Neugrütstrasse 2  
8610 Uster  
+41 44 508 78 78  
info@nevalux.swiss