

IS 3360 DALI-2 APC - concealed, rd.

PRESENCE DETECTOR

neva
lux

EAN 4007841033521

124 x 78 mm



IS 3360 DALI-2 APC - concealed, rd.

PRESENCE DETECTOR

EAN 4007841033521

Technical Data

IDENTIFICATION		Electronic scalability		No	With remote control		No
PU1 EAN	4007841033521	Mechanical scalability		No	Twilight setting teach		Yes
Material number	110046029	Radial range		Ø 8 m (50 m²)	Base light function in percent		10 – 50 %
SAP designation	BEWEGUNGSMELDER IS 3360-R DALI UP WS	Tangential range		Ø 40 m (1257 m²)	Base light function percent from		10
Version	Motion and Presence Detector	Switching zones		1416 switching zones	Base light function percent to		50
Product name data sheet	IS 3360 DALI-2 APC - concealed, rd.	Mounting height		2,50 – 4,00 m	HOUSING & MATERIAL		
Product category	Presence detector	Presence range		Ø 3 m (7 m²)	Protection class (IP)		IP20
Discount group	B	Optimal mounting height		2,8 m	Ambient temperature		from -20 up to 50 °C
Source	Steinel Excel	Nevalux sensor technology		DALI 2	Mounting location		ceiling
Product status	Normal	CONNECTIVITY			Application location		Indoors
Manufacturer	Steinel	Networking		Yes	Mounting type		Concealed wiring
DIMENSIONS		Type of networking		Master/slave	Material		Plastic
Dimensions Ø × H		Networking via		Cable	Application room		production facilities recreation room changing room function room / ancillary room sports hall reception / lobby stairwell WC / washroom multi-storey / underground car park warehouse Indoors
PU1 net weight		LIGHTING TECHNOLOGY			Colour		white
ELECTRICAL		Soft light start		Yes	RAL colour		9003
Mains connection		Continuous light		selectable, 4h	SCOPE OF DELIVERY & WARRANTY		
Control output DALI		Constant light regulation		Yes	Manufacturer warranty		5 years
SENSOR TECHNOLOGY		SETTINGS			Corner wall bracket included		No
Max. mounting height		Twilight switch		Yes	CERTIFICATES & EPREL		
Sensor technology		Twilight setting		2 – 1000 lx	Certificates		DALI-2
With motion detector		Time setting		5 s – 15 Min.			
Detection angle		Base light function		Yes			
Opening angle		Base light function time		1-30 min all night			
Sneak-under protection		Main light adjustable		50 - 100 %			
Segment-by-segment masking		Functions		Normal / test mode Manual ON / ON-OFF Constant-lighting control ON-OFF			
		Settings via		Remote control Potentiometers Smart Remote			


IS 3360 DALI-2 APC - concealed, rd.

PRESENCE DETECTOR

EAN 4007841033521

Illustrations

TECHNICAL DRAWINGS

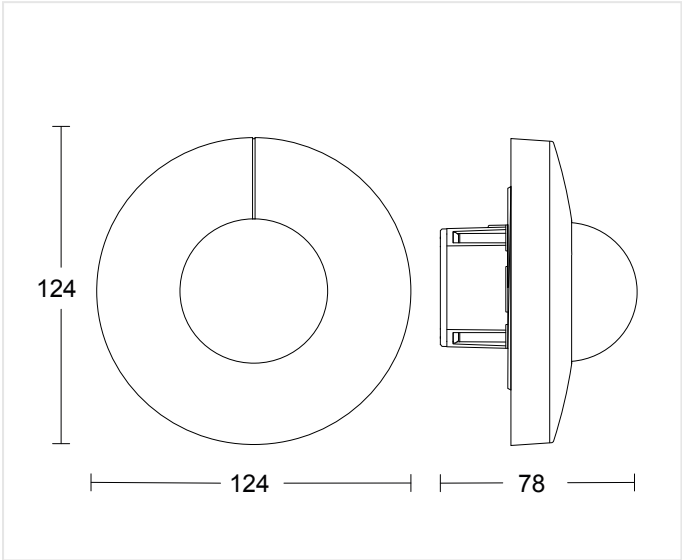

124 x 78 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


IS 3360 DALI-2 APC - concealed, rd.

PRESENCE DETECTOR

EAN 4007841033521


Wiring Diagrams

WIRING DIAGRAM 1

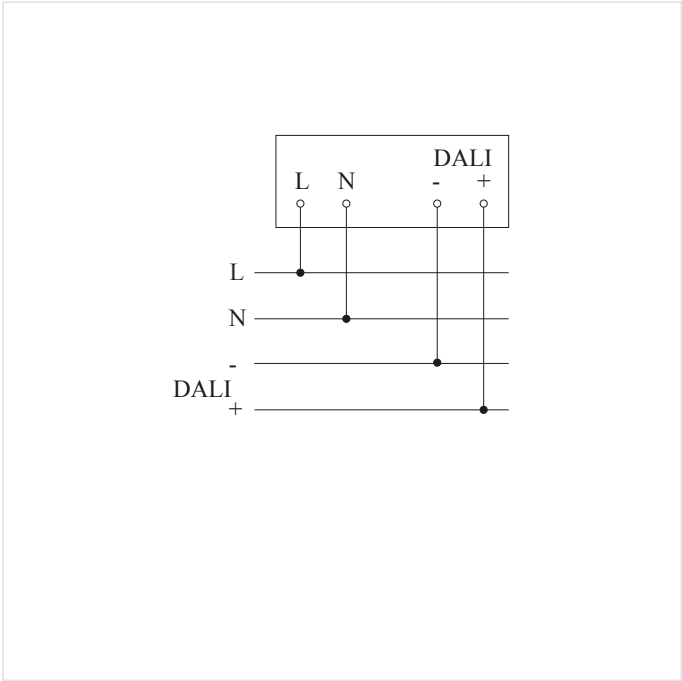

Master circuit diagram

WIRING DIAGRAM 2

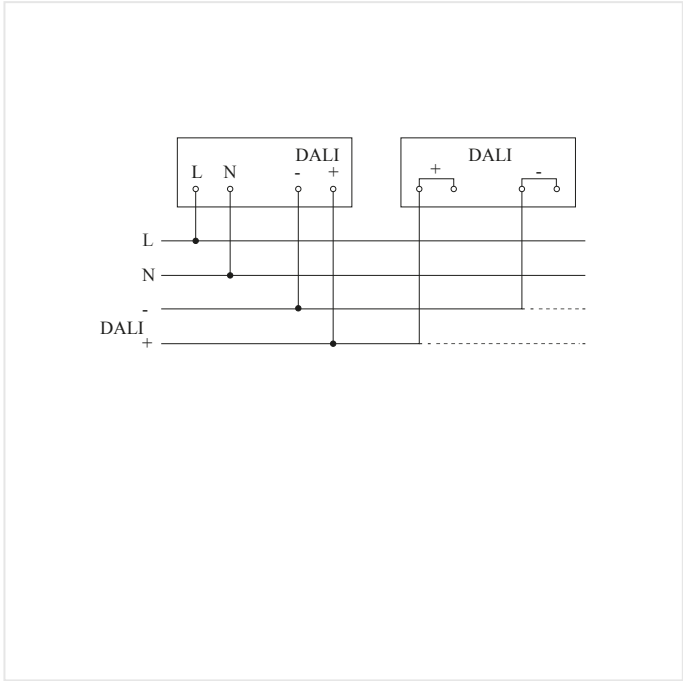

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

IS 3360 DALI-2 APC - concealed, rd.

EAN 4007841033521

PRESENCE DETECTOR

Highlights



UV-resistant plastic



Optional remote controls

IS 3360 DALI-2 APC - concealed, rd.

PRESENCE DETECTOR

EAN 4007841033521

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841056742	Schwarze Blende für IR-Sensoren Unterputz rund	Accessory
 4007841056728	Schwarze Blende für IR-Sensoren Unterputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

033521

EAN

4007841033521

Typ

IS 3360 DALI-2 APC - concealed, rd.

neva
lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss