

IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

neva
lux

EAN 4007841068523

65 x 95 x 95 mm



IS 3360 40m COM1 - surface, sq. black

EAN 4007841068523

PRESENCE DETECTOR

Technical Data

IDENTIFICATION			
PU1 EAN	4007841068523	LED lamps > 8 W	600 W
Material number	110078854	Capacitive load in µF	176 µF
SAP designation	BEWEGUNGSMELDER IS 3360-E COM1 AP SW	Switching output 1 number of LED/fluorescent lamps	8
Version	Motion and Presence Detector	Maximum inrush current	110 A
Product name data sheet	IS 3360 40m COM1 - surface, sq. black	SENSOR TECHNOLOGY	
Product category	Presence detector	Max. mounting height	4,00 m
Discount group	B	Sensor technology	passive infrared
Source	Steinel Excel	With motion detector	Yes
Product status	Normal	Detection angle	360 °
Manufacturer	Steinel	Opening angle	180 °
DIMENSIONS		Sneak-under protection	Yes
Dimensions L x W x H	65 x 95 x 95 mm	Segment-by-segment masking	Yes
PU1 net weight	0.176	Electronic scalability	No
ELECTRICAL		Mechanical scalability	No
Mains connection	220 – 240 V / 50 – 60 Hz	Radial range	Ø 8 m (50 m²)
Power	2000 W	Tangential range	Ø 40 m (1257 m²)
Switching output 1 resistive	2000 W	Switching zones	1416 switching zones
Fluorescent lamps ECG	1500 W	Mounting height	2,50 – 4,00 m
Fluorescent lamps uncompensated	1000 VA	Presence range	Ø 3 m (7 m²)
Fluorescent lamps series-compensated	400 VA	Optimal mounting height	2,8 m
Fluorescent lamps parallel-compensated	400 VA	Nevalux sensor technology	On / Off
Switching output 1 low-voltage halogen lamps	2000 VA	CONNECTIVITY	
LED lamps < 2 W	100 W	Networking	Yes
LED lamps > 2 W < 8 W	300 W	Type of networking	Master/master
		Networking via	Cable
		LIGHTING TECHNOLOGY	
		Soft light start	No
		Continuous light	selectable, 4h
		Constant light regulation	No
		SETTINGS	
		Twilight switch	Yes
		Twilight setting	2 – 1000 lx
		Time setting	5 s – 15 Min.
		Base light function	No
		Main light adjustable	No
		Functions	Normal / test mode Manual ON / ON-OFF
		Settings via	Remote control Potentiometers Smart Remote
		With remote control	No
		Twilight setting teach	Yes
		HOUSING & MATERIAL	
		Protection class (IP)	IP54
		Ambient temperature	from -20 up to 50 °C
		Mounting location	ceiling
		Application location	Outdoors Indoors
		Mounting type	Surface wiring
		Material	Plastic
		Application room	production facilities recreation room changing room function room / ancillary room sports hall reception / lobby stairwell WC / washroom multi-storey / underground car park outdoors warehouse Indoors
		Colour	black
		RAL colour	9005
		SCOPE OF DELIVERY & WARRANTY	
		Manufacturer warranty	5 years
		Corner wall bracket included	No

IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

EAN 4007841068523

Illustrations

TECHNICAL DRAWINGS



65 x 95 x 95 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------


IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

EAN 4007841068523


Wiring Diagrams

WIRING DIAGRAM 1

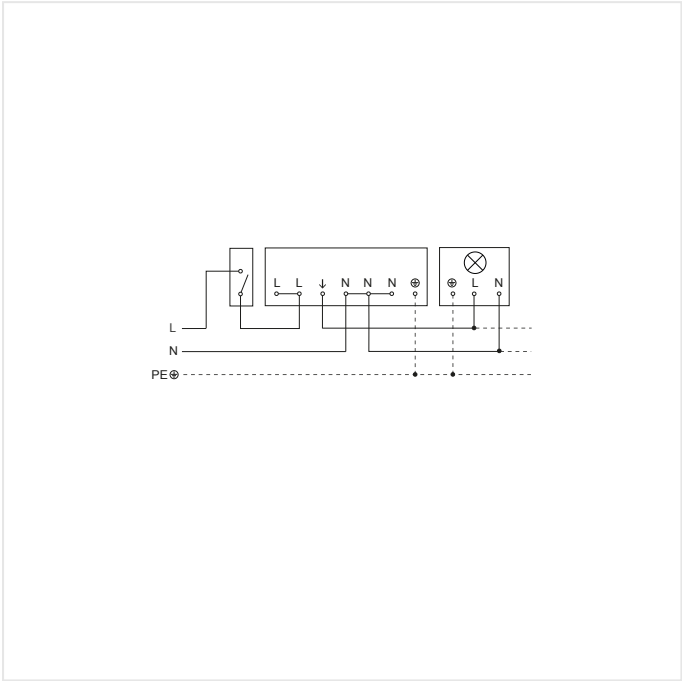

Light without neutral conductor

WIRING DIAGRAM 2

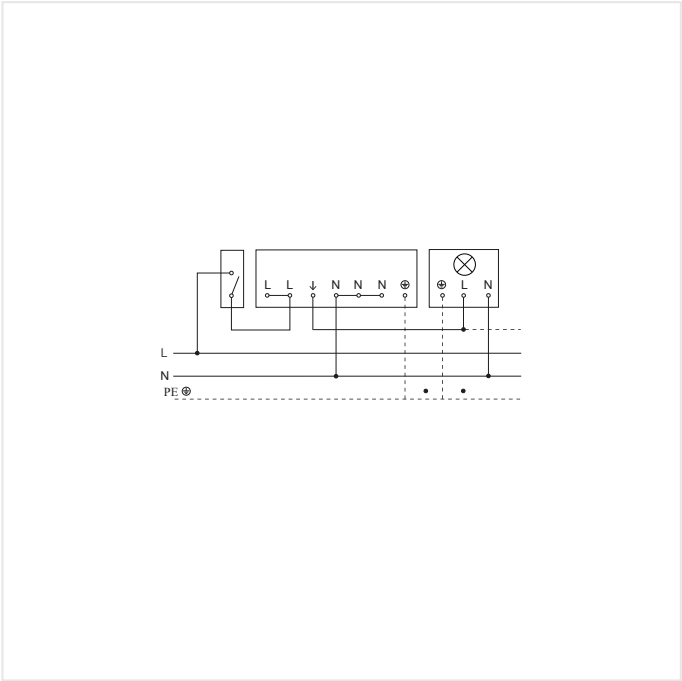

Circuit diagram for interconnecting several sensors

IS 3360 40m COM1 - surface, sq. black

EAN 4007841068523

PRESENCE DETECTOR

Highlights



UV-resistant plastic



Large terminal compartment



Optional remote controls

IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

EAN 4007841068523

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841009151	Smart Remote	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

068523

EAN

4007841068523

Typ

IS 3360 40m COM1 - surface, sq. black

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss