

XLED home 2 S black

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841033071

- Spotlight with motion detector and fully swivelling LED panel in noble opal look
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Optional corner wall bracket available for reliable and uninterrupted monitoring of an area in front of two house walls
- Warm white light (3000 K) and long-life 13,7 W LEDs with 1550 lm, with an illumination of max. 150 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

161 x 180 x 218 mm



XLED home 2 S black

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033071

Technical Data

IDENTIFICATION					
PU1 EAN	4007841033071	Mechanical scalability	No	Twilight setting	2 – 2000 lx
Material number	110094566	Radial range	r = 5 m (39 m²)	Time setting	8 s – 35 Min.
SAP designation	LED STRAHLER XLED HOME 2 S SW V2	Tangential range	r = 10 m (157 m²)	Base light function	No
Product name data sheet	XLED home 2 S black	Mounting height	1,80 – 4,00 m	Main light adjustable	No
Product category	Sensor-switched LED floodlight	Optimal mounting height	2 m	Settings via	Potentiometers
Discount group	SH	CONNECTIVITY		Twilight setting teach	No
Source	Steinel Excel	Networking		HOUSING & MATERIAL	
Product status	Discontinued item	LIGHTING TECHNOLOGY		Impact resistance	IK03
Manufacturer	Steinel	Measured luminous flux 360°	1550 lm	Protection class (IP)	IP44
DIMENSIONS		Colour temperature	3000 K	Protection class	II
Dimensions L x W x H	161 x 180 x 218 mm	LED colour deviation	SDCM3	Ambient temperature	from -20 up to 40 °C
PU1 net weight	0.565	Colour rendering index	80-89	Housing material	HCMC
ELECTRICAL		With illuminant	Yes, STEINEL LED system	Cover material	Plastic, opal
Mains connection	220 – 240 V / 50 – 60 Hz	Illuminant	LED cannot be replaced	Mounting location	wall corner
Power	13,7 W	Base	without	Application location	Outdoors
SENSOR TECHNOLOGY		LED cooling system	HCMC (High Conductive Magnesium Composite)	Mounting type	Surface wiring
Max. mounting height	4,00 m	Soft light start	No	Application room	outdoors all round the building terrace / balcony courtyard & driveway
Sensor technology	passive infrared	Photobiological safety per EN 62471	Sonstige	Colour	black
With motion detector	Yes	LIFETIME		SCOPE OF DELIVERY & WARRANTY	
Detection angle	180 °	LED lifetime max. °C	50000 h	Manufacturer warranty	5 years
Opening angle	35 °	LED lifetime L70B50 25°C	> 60000 h	Corner wall bracket included	No
Sneak-under protection	Yes	Luminous flux decline per LM80	L70B10	CERTIFICATES & EPREL	
Segment-by-segment masking	Yes	SETTINGS		EPREL energy efficiency class	E
Electronic scalability	No	Twilight switch	Yes	EPREL category	Light source


XLED home 2 S black

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033071

Illustrations

TECHNICAL DRAWINGS

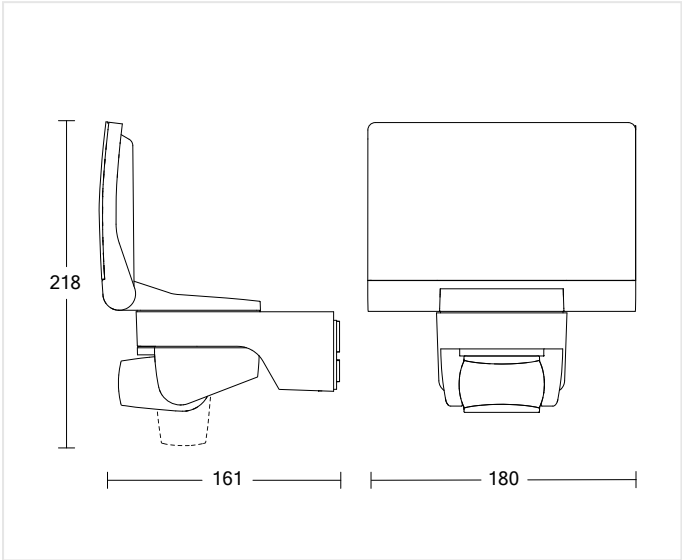

161 x 180 x 218 mm

MOUNTING HEIGHT

1,80 – 4,00 m BEREICH	2 m OPTIMAL	4,00 m MAX
---	-----------------------------------	----------------------------------


XLED home 2 S black

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033071

Wiring Diagrams

WIRING DIAGRAM 1

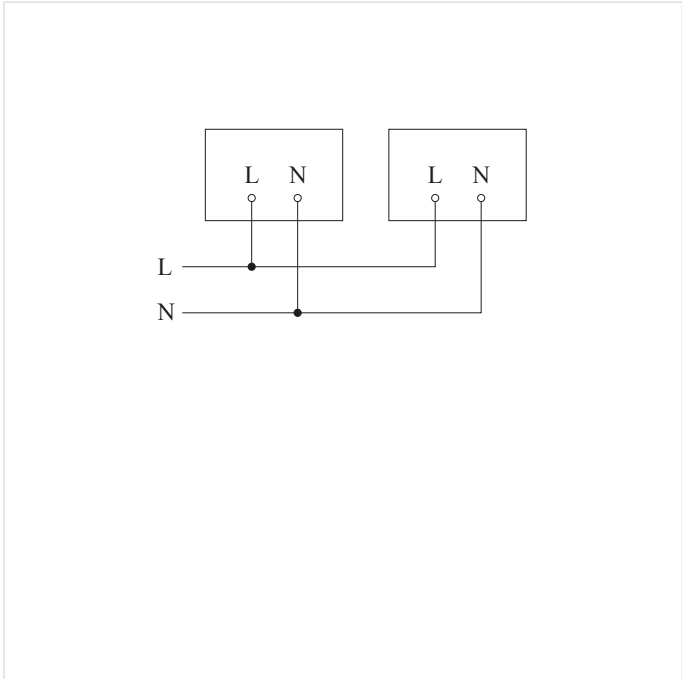


Circuit diagram

XLED home 2 S black


EAN 4007841033071

SENSOR-SWITCHED LED FLOODLIGHT

Highlights

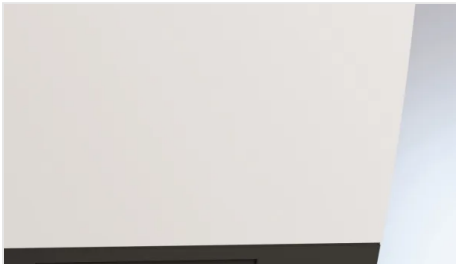


Including STEINEL LED system

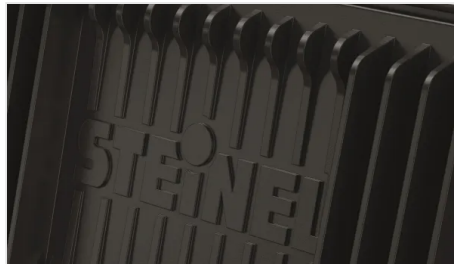

HCMC cooling system



UV-resistant plastic

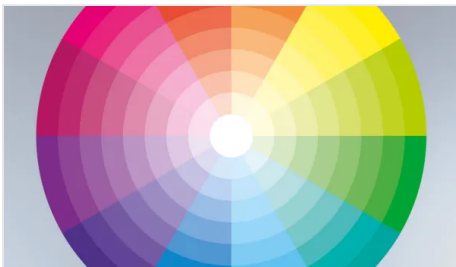

Colour rendering index Ra $\geq$ 80

XLED home 2 S black

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033071

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841055875	Eckwandhalter XLED Home 2/ Protect/ Pro 240 schwarz	Accessory
 4007841053086	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse graphit	Accessory
 4007841055615	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse weiss	Accessory
 4007841053109	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse silber	Accessory

ORDERING INFORMATION

Art.-Nr.

033071

EAN

4007841033071

Typ

XLED home 2 S black

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss