

IS 3360 COM1 - surface, rd. white

PRESENCE DETECTOR

neva
lux

EAN 4007841033446

126 x 65 mm



IS 3360 COM1 - surface, rd. white

PRESENCE DETECTOR

EAN 4007841033446

Technical Data

IDENTIFICATION				SETTINGS	
PU1 EAN	4007841033446	LED lamps > 8 W	600 W	Twilight switch	Yes
Material number	110046021	Capacitive load in µF	176 µF	Twilight setting	2 – 1000 lx
SAP designation	BEWEGUNGSMELDER IS 3360-R COM1 AP WS	Switching output 1 number of LED/fluorescent lamps	8	Time setting	5 s – 15 Min.
Version	Motion and Presence Detector	Maximum inrush current	110 A	Base light function	No
Product name data sheet	IS 3360 COM1 - surface, rd. white	SENSOR TECHNOLOGY		Main light adjustable	No
Product category	Presence detector	Max. mounting height	4,00 m	Functions	Normal / test mode Manual ON / ON-OFF
Discount group	B	Sensor technology	passive infrared	Settings via	Remote control Potentiometers Smart Remote
Source	Steinel Excel	With motion detector	Yes	With remote control	No
Product status	Normal	Detection angle	360 °	Twilight setting teach	Yes
Manufacturer	Steinel	Opening angle	180 °	HOUSING & MATERIAL	
DIMENSIONS		Sneak-under protection	Yes	Protection class (IP)	IP54
Dimensions Ø × H	126 x 65 mm	Segment-by-segment masking	Yes	Ambient temperature	from -20 up to 50 °C
PU1 net weight	0.183	Electronic scalability	No	Mounting location	ceiling
ELECTRICAL		Mechanical scalability	No	Application location	Outdoors Indoors
Mains connection	220 – 240 V / 50 – 60 Hz	Radial range	Ø 8 m (50 m²)	Mounting type	Surface wiring
Power	2000 W	Tangential range	Ø 40 m (1257 m²)	Material	Plastic
Switching output 1 resistive	2000 W	Switching zones	1416 switching zones	Application room	production facilities recreation room changing room function room / ancillary room sports hall reception / lobby stairwell WC / washroom multi-storey / underground car park outdoors warehouse Indoors
Fluorescent lamps ECG	1500 W	Mounting height	2,50 – 4,00 m	Colour	white
Fluorescent lamps uncompensated	1000 VA	Presence range	Ø 3 m (7 m²)	RAL colour	9003
Fluorescent lamps series-compensated	400 VA	Optimal mounting height	2,8 m	SCOPE OF DELIVERY & WARRANTY	
Fluorescent lamps parallel-compensated	400 VA	Nevalux sensor technology	On / Off	Manufacturer warranty	5 years
Switching output 1 low-voltage halogen lamps	2000 VA	CONNECTIVITY		Corner wall bracket included	No
LED lamps < 2 W	100 W	Networking	Yes		
LED lamps > 2 W < 8 W	300 W	Type of networking	Master/master		
		Networking via	Cable		
		LIGHTING TECHNOLOGY			
		Soft light start	No		
		Continuous light	selectable, 4h		
		Constant light regulation	No		


IS 3360 COM1 - surface, rd. white

PRESENCE DETECTOR

EAN 4007841033446

Illustrations

TECHNICAL DRAWINGS

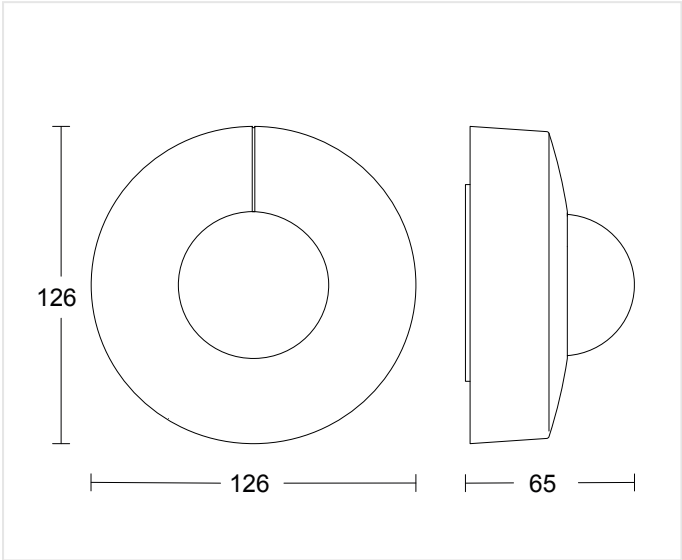

126 x 65 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


IS 3360 COM1 - surface, rd. white

EAN 4007841033446

PRESENCE DETECTOR


Wiring Diagrams

WIRING DIAGRAM 1

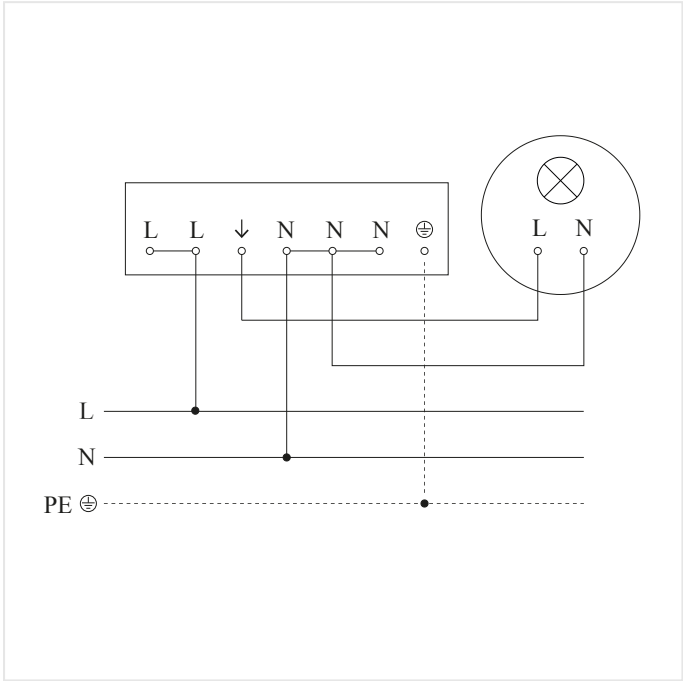

Circuit diagram

WIRING DIAGRAM 2

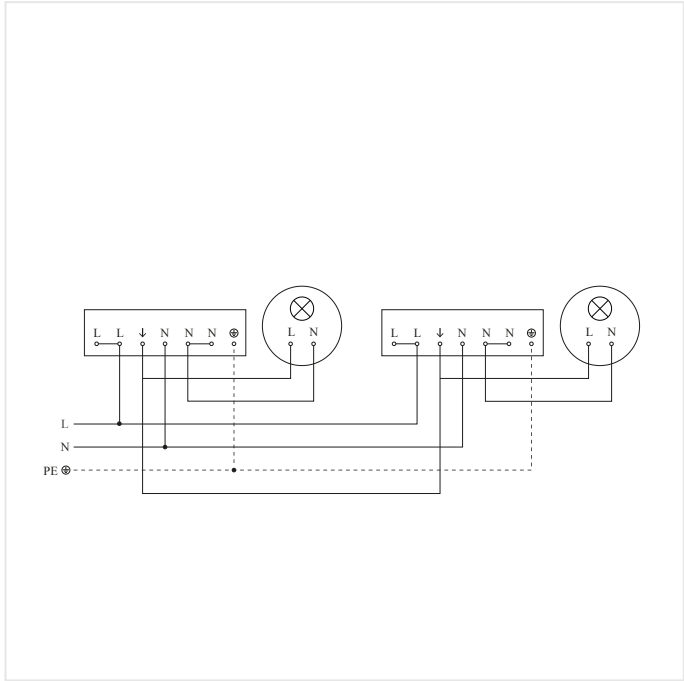

Circuit diagram for interconnecting several sensors

IS 3360 COM1 - surface, rd. white

EAN 4007841033446

PRESENCE DETECTOR

Highlights



UV-resistant plastic



Large terminal compartment



Optional remote controls

IS 3360 COM1 - surface, rd. white

PRESENCE DETECTOR

EAN 4007841033446

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

033446

EAN

4007841033446

Typ

IS 3360 COM1 - surface, rd. white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss