

PD IR 4360-8 KNX - Surface wiring black

neva
lux

MOTION AND PRESENCE DETECTOR

EAN 4007841086169

- Our series for the common ranges
- Presence detector with 8 m motion detection and 6 m presence detection for integration into a KNX bus system
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Start of programming mode from a distance via Smart Remote remote control via app
- External approval and measurement in accordance with sensNORM

129 x 65 mm



PD IR 4360-8 KNX - Surface wiring black

MOTION AND PRESENCE DETECTOR

EAN 4007841086169

Technical Data

IDENTIFICATION			Segment-by-segment masking			Yes			Functions			Motions sensor Light sensor Presence function Presence detector logic		
PU1 EAN			Electronic scalability			No								
Material number			Mechanical scalability			No			Settings via			Smart Remote ETS software Bus		
SAP designation			Radial range			Ø 4.5 m (16 m²)			With remote control			No		
Version			Tangential range			Ø 8 m (50 m²)			Twilight setting teach			Yes		
			Switching zones			492 switching zones			HOUSING & MATERIAL					
Product name data sheet			Mounting height			2 – 4 m			Protection class (IP)			IP54		
			Presence range			Ø 6 m (28 m²)			Ambient temperature			from -20 up to 50 °C		
Product category			Optimal mounting height			2,8 m			Housing material			Plastic		
Discount group			Nevalux sensor technology			KNX			Cover material			Other		
Source			CONNECTIVITY						Cover material (scope of delivery)			shrouds		
Product status			Type of networking			Master/master			Mounting location			ceiling		
Manufacturer			Networking via			Cable			Application location			Indoors		
DIMENSIONS			KNX functions			Light level Light output 2x Constant-lighting control Photo-cell controller Basic light level function HVAC output Logic gate Presence output Sabotage protection Day / night function			Mounting type			Surface wiring		
Dimensions L × W × H									Material			Plastic		
Dimensions Ø × H									Application room			one-person office function room / ancillary room Indoors warehouse		
PU1 net weight									Colour			black		
SENSOR TECHNOLOGY			With bus coupler			Yes			RAL colour			9005		
Max. mounting height			SETTINGS						SCOPE OF DELIVERY & WARRANTY					
Sensor technology			Twilight setting			2 – 800 lx			Manufacturer warranty			5 years		
With motion detector			Time setting			10 s – 1092 Min.			Corner wall bracket included			No		
Detection angle														
Sneak-under protection														


PD IR 4360-8 KNX - Surface wiring black

MOTION AND PRESENCE DETECTOR

EAN 4007841086169

Illustrations

TECHNICAL DRAWINGS

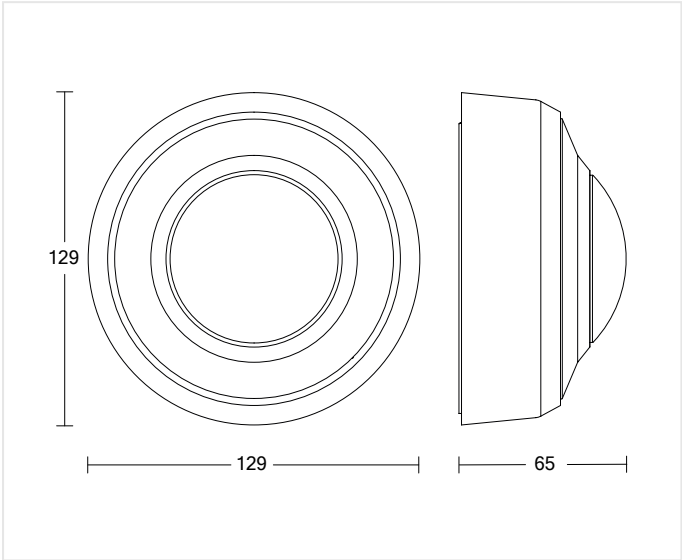

129 x 65 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---------------------------------------	-------------------------------------	----------------------------------

PD IR 4360-8 KNX - Surface wiring black

MOTION AND PRESENCE DETECTOR

EAN 4007841086169

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

086169

EAN

4007841086169

Typ

PD IR 4360-8 KNX - Surface wiring black

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss