

PD IR 4360-8 COM1 - in-ceiling installation black

neva
lux

MOTION AND PRESENCE DETECTOR

EAN 4007841085094

- Our series for the common ranges
- Presence detector with 8 m motion detection and 6 m presence detection for switching light
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Key input and parallel switching of multiple sensors to expand the detection range
- External approval and measurement in accordance with sensNORM

109 x 109 mm



PD IR 4360-8 COM1 - in-ceiling installation black

MOTION AND PRESENCE DETECTOR

EAN 4007841085094

Technical Data

IDENTIFICATION		Sensor technology		passive infrared		Main light adjustable		No	
PU1 EAN	4007841085094	With motion detector			Yes	Functions	Motions sensor	Light sensor	Presence
Material number	110090127	Detection angle			360 °		Presence function	detector logic	Semi-/fully
SAP designation	PRAESENZMELDER PD IR 4360-8 COM1 DE SW	Sneak-under protection			Yes		automatic	Potentiometer	Relay output
Version	Motion and Presence Detector	Segment-by-segment masking			Yes			Normal / test mode	
Product name data sheet	PD IR 4360-8 COM1 - in-ceiling installation black	Electronic scalability			No	Settings via	Remote control	Smart Remote	Potentiometers
Product category	Motion and Presence Detector	Mechanical scalability			No	With remote control	No		
Discount group	P	Radial range			Ø 4.5 m (16 m²)	Twilight setting teach	Yes		
Source	Steinel Excel	Tangential range			Ø 8 m (50 m²)	HOUSING & MATERIAL			
Product status	Normal	Switching zones			492 switching zones	Protection class (IP)	IP20		
Manufacturer	Steinel	Mounting height			2 – 4 m	Ambient temperature	from -20 up to 50 °C		
DIMENSIONS		Presence range			Ø 6 m (28 m²)	Housing material	Plastic		
Dimensions Ø × H	109 x 109 mm	Optimal mounting height			2,8 m	Cover material	Other		
PU1 net weight	0.208	Nevalux sensor technology			On / Off	Cover material (scope of delivery)	shrouds		
ELECTRICAL		CONNECTIVITY				Mounting location	ceiling		
Mains connection	50 – 60 Hz	Networking			Yes	Application location	Indoors		
Switching output 1 resistive	2000 W	Type of networking			Master/master	Mounting type	In-ceiling installation		
LED lamps > 8 W	500 W	Networking via			Cable	Material	Plastic		
Capacitive load in µF	176 µF	LIGHTING TECHNOLOGY				Application room	one-person office function room / ancillary room Indoors warehouse		
Switching output 1 number of LED/fluorescent lamps	50	Soft light start			Yes	Colour	black		
Maximum inrush current	800 A	Constant light regulation			No	RAL colour	9010		
SENSOR TECHNOLOGY		SETTINGS				SCOPE OF DELIVERY & WARRANTY			
Max. mounting height	4,00 m	Twilight switch			Yes	Manufacturer warranty	5 years		
		Twilight setting			2 – 1000 lx	Corner wall bracket included	No		
		Time setting			5 s – 60 Min.				


PD IR 4360-8 COM1 - in-ceiling installation black

MOTION AND PRESENCE DETECTOR

EAN 4007841085094

Illustrations

TECHNICAL DRAWINGS

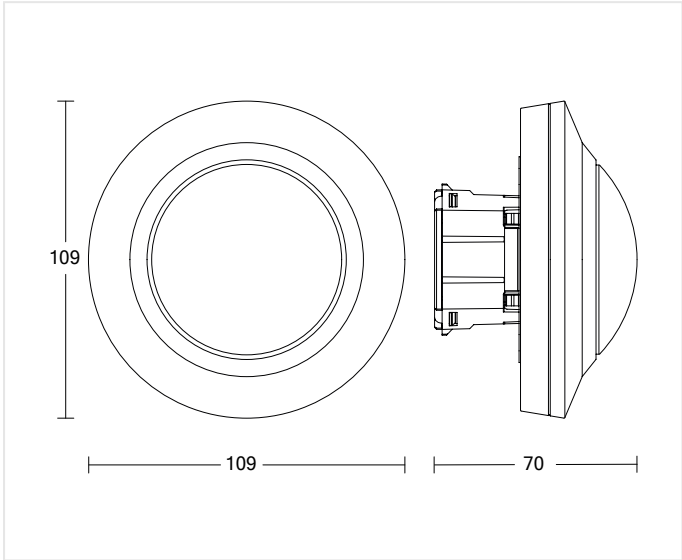

109 x 109 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------


PD IR 4360-8 COM1 - in-ceiling installation black

EAN 4007841085094

MOTION AND PRESENCE DETECTOR


Wiring Diagrams

WIRING DIAGRAM 1

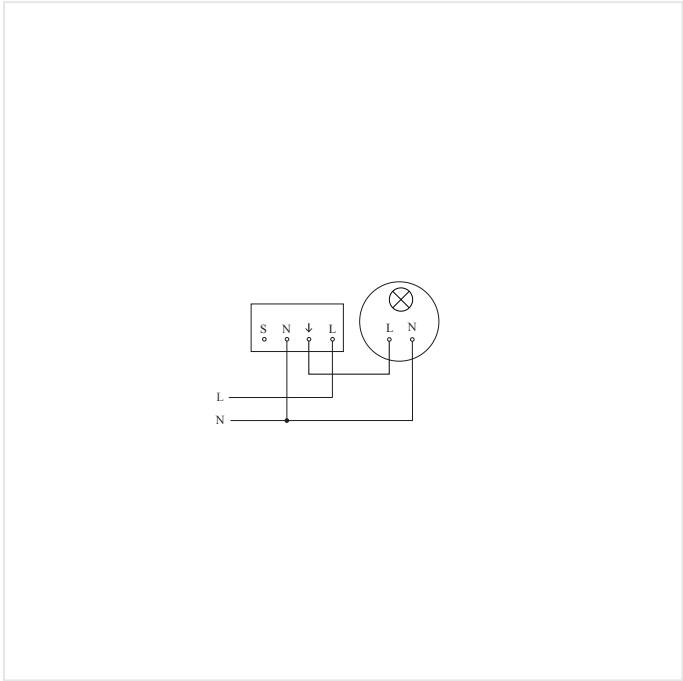

Circuit diagram

WIRING DIAGRAM 2

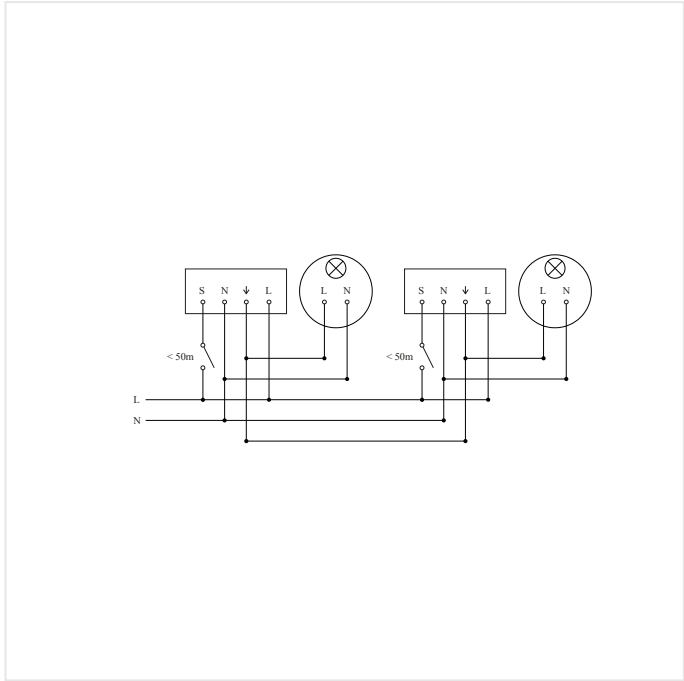

Circuit diagram for interconnecting max. 10 sensors

PD IR 4360-8 COM1 - in-ceiling installation black

MOTION AND PRESENCE DETECTOR

EAN 4007841085094

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

085094

EAN

4007841085094

Typ

PD IR 4360-8 COM1 - in-ceiling installation black

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss