

True Presence DALI-2 APC - concealed

PRESENCE DETECTOR

neva
lux

EAN 4007841057961

50 x 103 x 103 mm



True Presence DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841057961

Technical Data

IDENTIFICATION	
PU1 EAN	4007841057961
Material number	110062732
SAP designation	PRAESENZMELDER TRUE PRESENCE DALI2APC UP
Version	Presence detector
Product name data sheet	True Presence DALI-2 APC - concealed
Product category	Presence detector
Discount group	TP
Source	Steinel Excel
Product status	Normal
Manufacturer	Steinel
DIMENSIONS	
Dimensions L × W × H	50 x 103 x 103 mm
PU1 net weight	0.171
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Own consumption	1 W
Control output DALI	Broadcast 64 electronic ballasts / Addressable
SENSOR TECHNOLOGY	
Max. mounting height	12,00 m
Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	7,2 GHz
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	160 °

Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	Yes
Mechanical scalability	No
Radial range	Ø 15 m (177 m²)
Tangential range	Ø 15 m (177 m²)
Mounting height	2,00 – 12,00 m
Presence range	Ø 15 m (177 m²)
True Presence range	Ø 9 m (64 m²)
Optimal mounting height	2,8 m
Max. mounting height True Presence detection	4,00 m
Nevalux sensor technology	BT Open Mesh, DALI 2
CONNECTIVITY	
Networking	Yes
Type of networking	Master/slave
Networking via	Bluetooth DALI bus
LIGHTING TECHNOLOGY	
Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 2000 lx
Time setting	20 s – 60 Min.
Base light function	Yes
Base light function time	1-60 min, all night
Main light adjustable	10 - 100 %

Functions	Selecting programmed lighting scenarios Semi-/fully automatic Constant-lighting control ON-OFF Lighting scenario Manual ON / ON-OFF Neighbouring group function Normal / test mode TouchDIM function
Settings via	Bluetooth
With remote control	No
Twilight setting teach	Yes
HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	classroom lecture hall one-person office open-plan office high-bay warehouse production facilities conference room / meeting room hotel room care room duty room recreation room dining hall / staff restaurant changing room kitchenette sports hall reception / lobby WC / washroom warehouse
Indoors	
Colour	white
RAL colour	9003
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No
CERTIFICATES & EPREL	
Certificates	DALI-2


True Presence DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841057961

Illustrations

TECHNICAL DRAWINGS

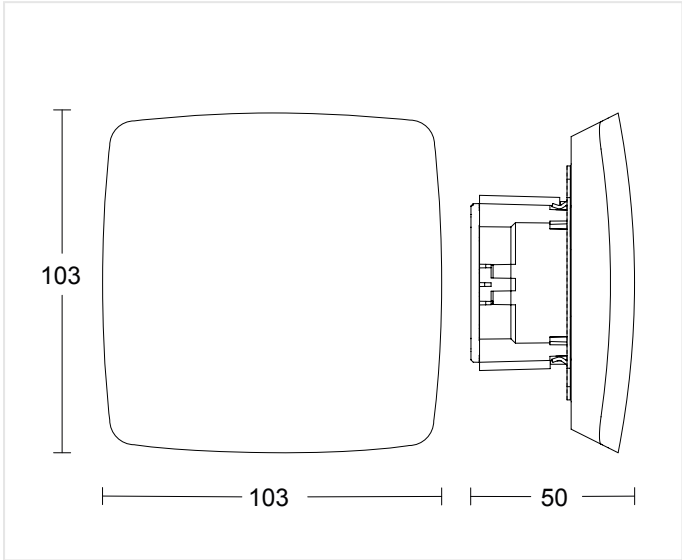

50 x 103 x 103 mm

MOUNTING HEIGHT

2,00 – 12,00 m BEREICH	2,8 m OPTIMAL	12,00 m MAX
---------------------------	------------------	----------------


True Presence DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841057961


Wiring Diagrams

WIRING DIAGRAM 1

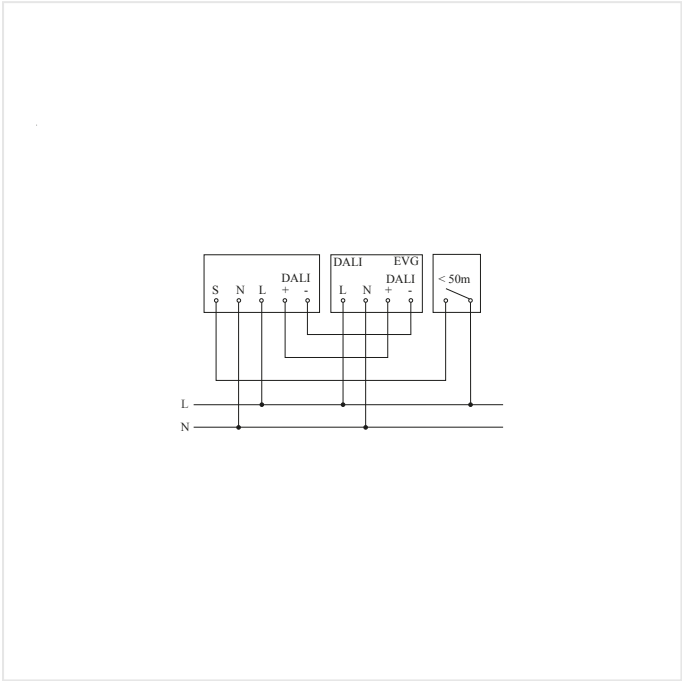

Master circuit diagram

WIRING DIAGRAM 2

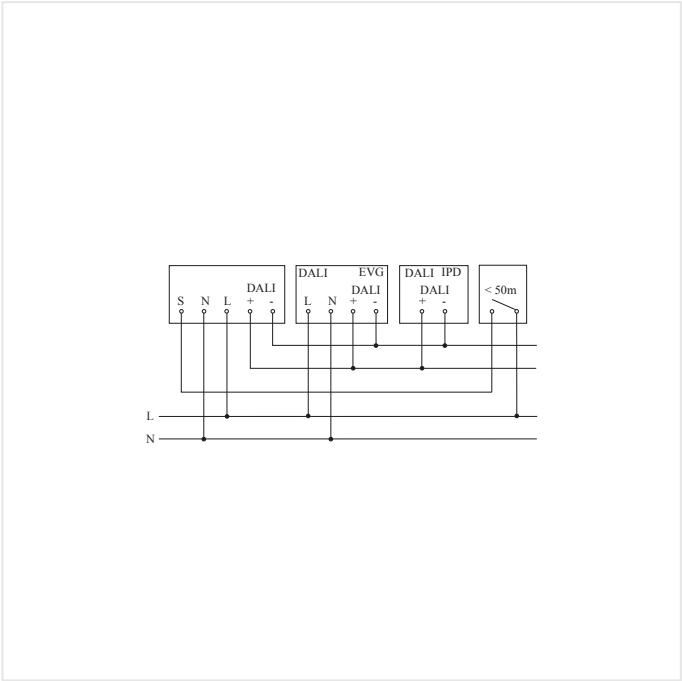

Master/slave interconnection circuit diagram

True Presence DALI-2 APC - concealed


EAN 4007841057961

PRESENCE DETECTOR

Highlights



UV-resistant plastic

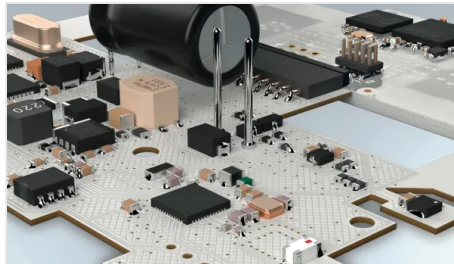

Digital high frequency sensor

True Presence DALI-2 APC - concealed

EAN 4007841057961

PRESENCE DETECTOR

Accessories

ORDERING INFORMATION

Art.-Nr. 057961

EAN 4007841057961

Typ True Presence DALI-2 APC - concealed

**neva
lux**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss