

RS PRO A20 SC Neutral white anthracite

neva
lux

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841085322

- Ideal for demanding environments such as pergolas or similar applications
- Non-visible high-frequency sensor with ø8 m range, 4000 K, 1514 lm, 12,4 W, 122,1 lm/W
- Robust aluminium housing with high impact resistance IK10 and protection class IP54
- Simple networking via Bluetooth Mesh Connect and commissioning via STEINEL Connect app
- Benefits of the Connected Lighting System and cross-range networking possible
- With plug-in terminals for easy installation

262 x 69 mm



RS PRO A20 SC Neutral white anthracite

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841085322

Technical Data

IDENTIFICATION		Nevalux sensor technology		BT SIG Mesh		Settings via		Bluetooth App	
PU1 EAN		4007841085322				With remote control		No	
Material number		110090382				Twilight setting teach		Yes	
SAP designation		INNENLEUCHTE RS PRO A20 NW SC ANT				Base light function in percent		0 – 100 %	
Product name data sheet		RS PRO A20 SC Neutral white anthracite				Base light function percent from		0	
Product category		Sensor-switched LED indoor light				Base light function percent to		100	
Discount group		DL				HOUSING & MATERIAL			
Source		Steinel Excel				Impact resistance		IK10	
Product status		Normal				Protection class (IP)		IP54	
Manufacturer		Steinel				Protection class		II	
DIMENSIONS						Ambient temperature		from -20 up to 40 °C	
Dimensions Ø × H		262 x 69 mm				Housing material		Aluminium	
PU1 net weight		1.29				Cover material		PC, opal	
ELECTRICAL						Mounting location		ceiling wall	
Mains connection		220 – 240 V / 50 – 60 Hz				Application location		Indoors	
Power		12,4 W				Mounting type		Surface wiring	
SENSOR TECHNOLOGY						Application room		corridor / aisle function room / ancillary room warehouse kitchenette stairwell changing room WC / washroom	
Max. mounting height		4,00 m				Colour		Anthracite	
Sensor technology		High frequency				Protection class ceiling		IP54	
Transmission power		< 1 mW				SCOPE OF DELIVERY & WARRANTY			
HF technology		5,8 GHz				Manufacturer warranty		5 years	
With motion detector		Yes				House number sheet included		No	
Detection		also through glass, wood and stud walls				CERTIFICATES & EPREL			
Detection angle		360 °				EPREL category		Surrounded product with integrated light source	
Opening angle		160 °							
Segment-by-segment masking		No							
Electronic scalability		Yes							
Mechanical scalability		No							
Radial range		Ø 8 m (50 m²)							
Tangential range		Ø 8 m (50 m²)							
Mounting height		2,00 – 4,00 m							
Optimal mounting height		2,8 m							


RS PRO A20 SC Neutral white anthracite

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841085322

Illustrations

TECHNICAL DRAWINGS

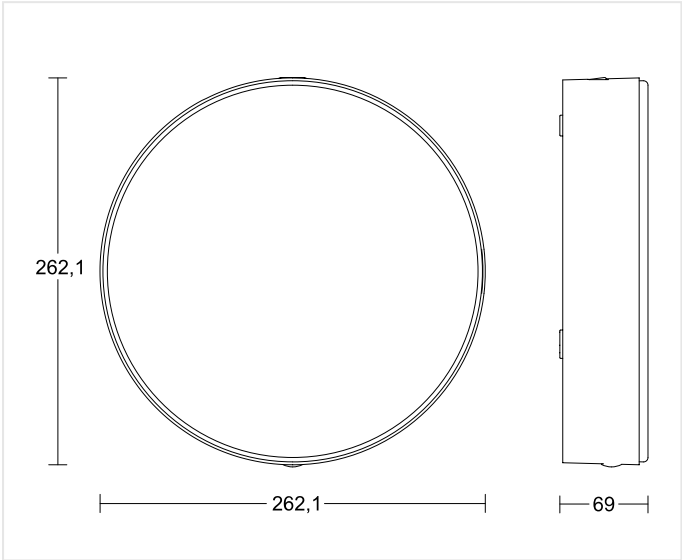

262 x 69 mm

MOUNTING HEIGHT

2,00 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

RS PRO A20 SC Neutral white anthracite

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841085322

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221386	Universal P-Set 3S	Suspension cable

ORDERING INFORMATION

Art.-Nr.

085322

EAN

4007841085322

Typ

RS PRO A20 SC Neutral white anthracite

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss