

PD IR 4360-24 KNX - concealed white

MOTION AND PRESENCE DETECTOR

neva
lux

EAN 4007841086152

- Our series for the common ranges
- Presence detector with 24 m motion detection and 7.5 m presence detection for integration into a KNX bus system
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Start of programming mode from a distance via Smart Remote remote control via app
- External approval and measurement in accordance with sensNORM

109 x 74 mm



PD IR 4360-24 KNX - concealed white

MOTION AND PRESENCE DETECTOR

EAN 4007841086152

Technical Data

IDENTIFICATION			Segment-by-segment masking			Yes			Functions			Motions sensor Light sensor Presence function Presence detector logic		
PU1 EAN			4007841086152											
Material number			110092755			Electronic scalability			No					
SAP designation			PRAESENZMELDER PD IR 4360-24 KNX UP WS			Mechanical scalability			No			Settings via		
						Radial range			Ø 5.5 m (24 m²)			Bus ETS software Smart Remote		
Version			Motion and Presence Detector			Tangential range			Ø 24 m (452 m²)			With remote control		
						Switching zones			1436 switching zones			Twilight setting teach		
Product name data sheet			PD IR 4360-24 KNX - concealed white			Mounting height			2 – 10,00 m					
Product category			Motion and Presence Detector			Presence range			Ø 7.5 m (44 m²)					
Discount group			PK			Optimal mounting height			2,8 m			HOUSING & MATERIAL		
Source			Steinel Excel			Nevalux sensor technology			KNX			Protection class (IP)		
Product status			Normal			CONNECTIVITY						Ambient temperature		
Manufacturer			Steinel			Type of networking			Master/master			from -20 up to 50 °C		
DIMENSIONS						Networking via			Cable			Housing material		
Dimensions L × W × H			74 x 109 x 109 mm			KNX functions			Light level Light output 2x Constant-lighting control Photo-cell controller Basic light level function HVAC output Logic gate Presence output Sabotage protection Day / night function			Cover material		
Dimensions Ø × H			109 x 74 mm									Cover material (scope of delivery)		
PU1 net weight			0.151			With bus coupler			Yes			Mounting location		
SENSOR TECHNOLOGY						SETTINGS						Application location		
Max. mounting height			10,00 m			Twilight setting			2 – 800 lx			Mounting type		
Sensor technology			passive infrared			Time setting			10 s – 1092 Min.			Material		
With motion detector			Yes									Application room		
Detection angle			360 °									one-person office function room / ancillary room Indoors warehouse		
Sneak-under protection			Yes									Colour		
												RAL colour		
												SCOPE OF DELIVERY & WARRANTY		
												Manufacturer warranty		
												5 years		
												Corner wall bracket included		
												No		


PD IR 4360-24 KNX - concealed white

MOTION AND PRESENCE DETECTOR

EAN 4007841086152

Illustrations

TECHNICAL DRAWINGS

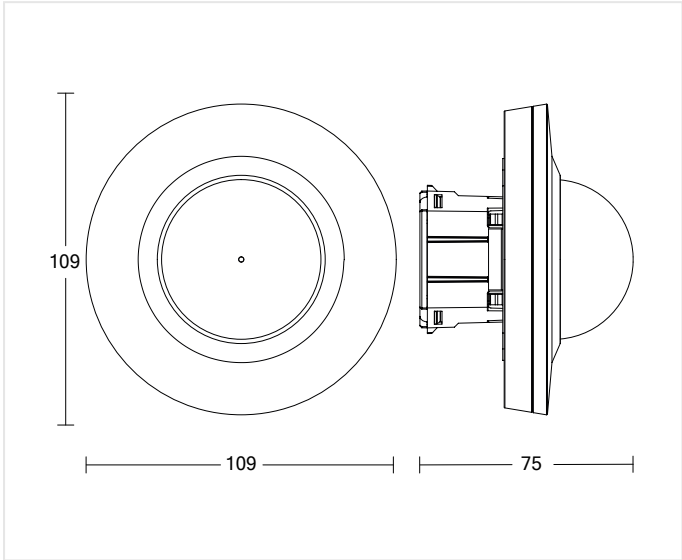

109 x 74 mm

MOUNTING HEIGHT

2 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
------------------------	------------------	----------------

PD IR 4360-24 KNX - concealed white

MOTION AND PRESENCE DETECTOR

EAN 4007841086152

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

086152

EAN

4007841086152

Typ

PD IR 4360-24 KNX - concealed white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss