

MD IR 4360-24 COM1 - Concealed wiring

neva
lux

MOTION DETECTOR

EAN 4007841086923

- Our series for the common ranges
- Motion detector with 24 m range for switching light
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Key input and parallel switching of multiple sensors to expand the detection range
- External approval and measurement in accordance with sensNORM

109 x 74 mm



MD IR 4360-24 COM1 - Concealed wiring

MOTION DETECTOR

EAN 4007841086923

Technical Data

IDENTIFICATION			
PU1 EAN	4007841086923	Sensor technology	passive infrared
Material number	110093187	With motion detector	Yes
SAP designation	BEWEGUNGSMELDER MD IR 4360-24 COM1 UP WS	Detection angle	360 °
Version	Motion detectors	Sneak-under protection	Yes
Product name data sheet	MD IR 4360-24 COM1 - Concealed wiring	Segment-by-segment masking	Yes
Product category	Motion detector	Electronic scalability	No
Discount group	B	Mechanical scalability	No
Source	Steinel Excel	Radial range	Ø 5.5 m (24 m²)
Product status	Normal	Tangential range	Ø 24 m (452 m²)
Manufacturer	Steinel	Switching zones	1436 switching zones
DIMENSIONS		Mounting height	2 – 10,00 m
Dimensions Ø × H	109 x 74 mm	Optimal mounting height	2,8 m
PU1 net weight	0.169	Nevalux sensor technology	On / Off
ELECTRICAL		CONNECTIVITY	
Mains connection	50 – 60 Hz	Networking	Yes
Switching output 1 resistive	2000 W	Type of networking	Master/master
LED lamps > 8 W	500 W	Networking via	Cable
Capacitive load in µF	176 µF	LIGHTING TECHNOLOGY	
Switching output 1 number of LED/fluorescent lamps	50	Soft light start	Yes
Maximum inrush current	800 A	Constant light regulation	No
SENSOR TECHNOLOGY		SETTINGS	
Max. mounting height	10,00 m	Twilight switch	Yes
		Twilight setting	2 – 1000 lx
		Time setting	5 s – 60 Min.
		Main light adjustable	No
		Functions	Motions sensor Light sensor Semi-/fully automatic Potentiometer Relay output Normal / test mode
		Settings via	Remote control Smart Remote Potentiometers
		With remote control	No
		Twilight setting teach	Yes
		HOUSING & MATERIAL	
		Protection class (IP)	IP20
		Ambient temperature	from -20 up to 50 °C
		Housing material	Plastic
		Cover material	Other
		Cover material (scope of delivery)	shrouds
		Mounting location	ceiling
		Application location	Indoors
		Mounting type	Concealed wiring
		Material	Plastic
		Application room	one-person office function room / ancillary room Indoors warehouse
		Colour	white
		RAL colour	9010
		SCOPE OF DELIVERY & WARRANTY	
		Manufacturer warranty	5 years
		Corner wall bracket included	No


MD IR 4360-24 COM1 - Concealed wiring

MOTION DETECTOR

EAN 4007841086923

Illustrations

TECHNICAL DRAWINGS

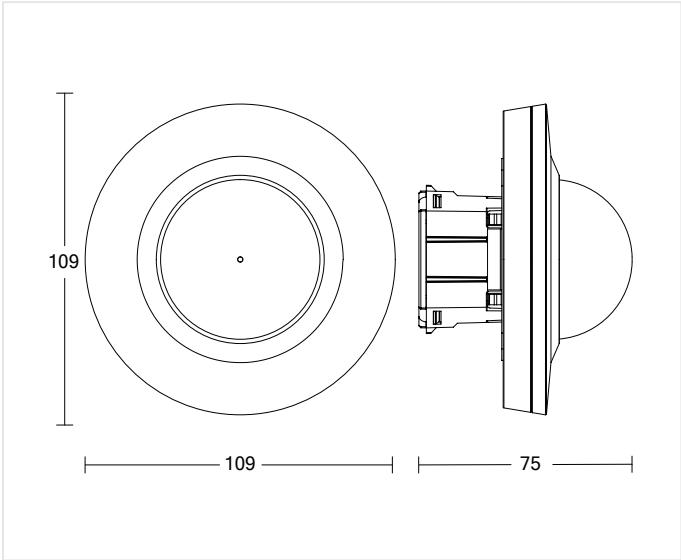

109 x 74 mm

MOUNTING HEIGHT

2 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
------------------------	------------------	----------------


MD IR 4360-24 COM1 - Concealed wiring

MOTION DETECTOR

EAN 4007841086923


Wiring Diagrams

WIRING DIAGRAM 1

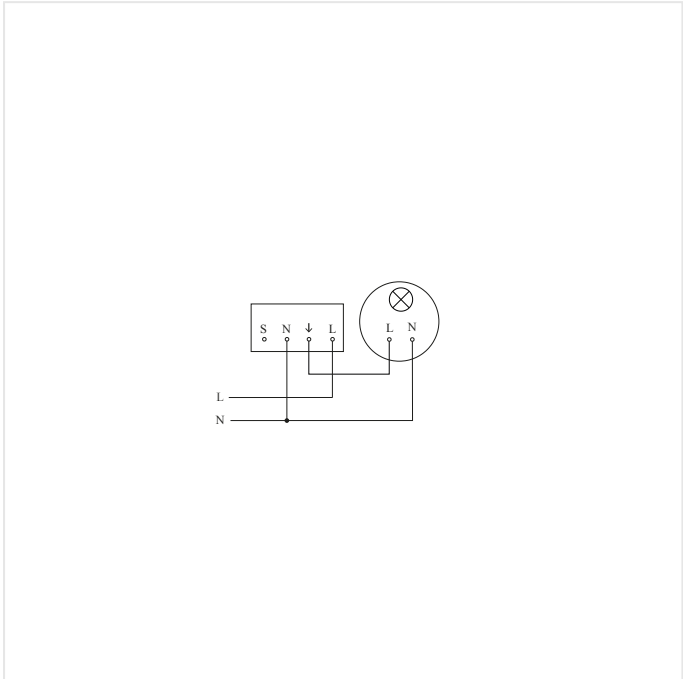

Circuit diagram

WIRING DIAGRAM 2

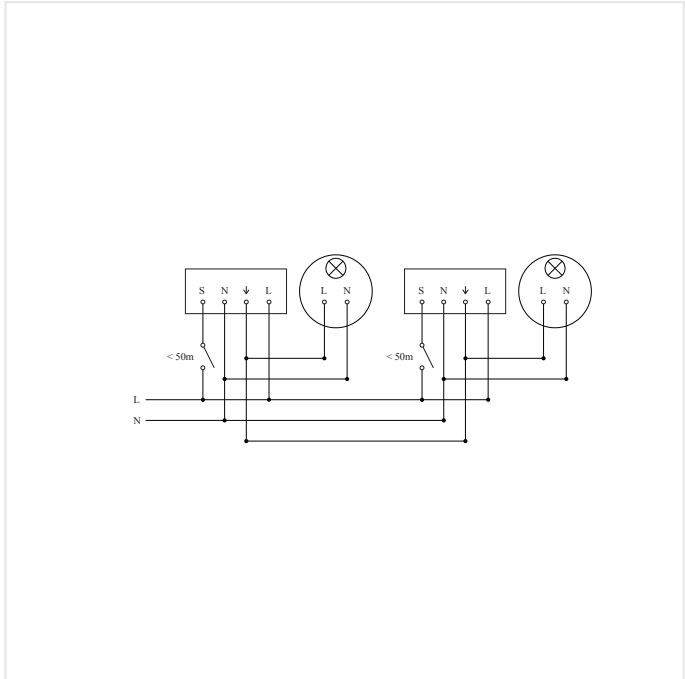

Circuit diagram for interconnecting max. 10 sensors

MD IR 4360-24 COM1 - Concealed wiring

MOTION DETECTOR

EAN 4007841086923

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

086923

EAN

4007841086923

Typ

MD IR 4360-24 COM1 - Concealed wiring

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss