


anele C595

ANELE CONNECT

neva
lux

595 x 595 x 8.5 mm (Einbautiefe: 40 mm)

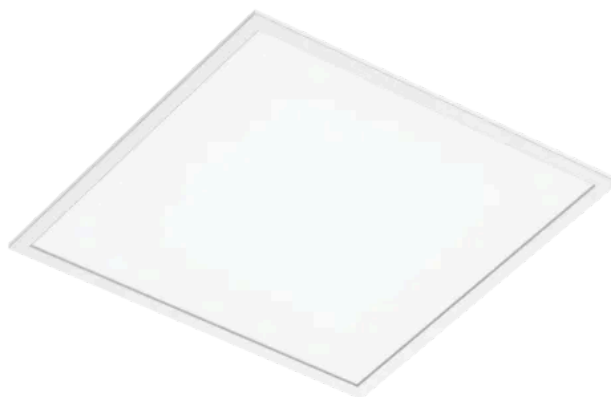

anele C595

ANELE CONNECT

Technical Data

IDENTIFICATION

Source	woocommerce
Product status	Normal
Manufacturer	Nevalux

DIMENSIONS

Dimensions L x W x H	595 x 595 x 8.5 mm (Einbautiefe: 40 mm)
----------------------	--

ELECTRICAL

Mains connection	200...240 V / 50 – 60 Hz
Power	33 W
Replaceable driver	Yes
Type of wiring	Suitable for through wiring

SENSOR TECHNOLOGY

With motion detector	No
Nevalux sensor technology	DALI 2, On / Off

With light sensor	No
-------------------	----

LIGHTING TECHNOLOGY

Colour temperature	4000 K
LED colour deviation	SDCM3
Colour rendering index	80-89
Illuminant	LED
Luminous flux	3960 lm
Beam angle	90°
Luminaire luminous efficacy	120 lm/W
Glare value	UGR < 19

LIFETIME

LED lifespan (25 °C)	50000 h
----------------------	---------

SETTINGS

DALI dimming	Yes
--------------	-----

With emergency light	No
----------------------	----

Suitable for light band configuration	No
---------------------------------------	----

HOUSING & MATERIAL

Protection class (IP)	IP20
Protection class	I
Ambient temperature	-20...45 °C
Housing material	Aluminum
Cover material	Microprismatic acrylic glass
Mounting type	In-ceiling installation
Colour	White

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
-----------------------	---------

CERTIFICATES & EPREL

EPREL energy efficiency class	E
-------------------------------	---

anele C595

ANELE CONNECT

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221638	anele APG 595	Installation housing
 221639	anele APG 620	Installation housing
 221640	anele DEF	Mounting kit
 221641	anele P-Set	Suspension cable
 220721	Emergency Package 1h (50V/2.5W/Box)	Emergency lighting

ORDERING INFORMATION

Art.-Nr.

221636

Typ

anele C595

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss