

LS 150 white

FLOODLIGHT WITHOUT SENSOR

neva
lux

EAN 4007841069223

- Spotlight without motion detector with robust aluminium spotlight head and optimum light diffusion thanks to ceramic reflector
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Spotlight head can be swivelled horizontally by 80° and vertically by 150°
- Optional corner wall bracket available for optimal illumination of an area in front of two house walls
- Neutral white light (4000 K) and long-life 14,7 W LEDs with 1375 lm, with an illumination of max. 150 sqm
- Incl. mounting accessories - plastic-free packaging

178 x 157 x 178 mm



LS 150 white

FLOODLIGHT WITHOUT SENSOR

EAN 4007841069223

Technical Data

IDENTIFICATION		CONNECTIVITY		HOUSING & MATERIAL	
PU1 EAN	4007841069223	Networking	No	Impact resistance	IK03
Material number	110082777	LIGHTING TECHNOLOGY		Protection class (IP)	IP44
SAP designation	LED STRAHLER LS 150 WS	Measured luminous flux 360°	1486 lm	Protection class	I
Product name data sheet	LS 150 white	Colour temperature	4000 K	Ambient temperature	from -10 up to 30 °C
Product category	Floodlight without sensor	LED colour deviation	SDCM3	Housing material	Aluminium
Discount group	SCH	Colour rendering index	80-89	Cover material	Glass transparent
Source	Steinel Excel	With illuminant	Yes, STEINEL LED system	Mounting location	wall
Product status	Normal	Illuminant	LED cannot be replaced	Application location	Outdoors
Manufacturer	Steinel	Base	without	Mounting type	Surface wiring
DIMENSIONS		LED cooling system	Passive Thermo Control	Application room	garden front door courtyard & driveway multi-storey / underground car park all round the building terrace / balcony
Dimensions L x W x H	178 x 157 x 178 mm	Soft light start	No	Colour	white
PU1 net weight	0.81	Efficiency without cover	77 lm/W	SCOPE OF DELIVERY & WARRANTY	
ELECTRICAL		LIFETIME		Manufacturer warranty	3 years
Mains connection	220 – 240 V / 50 – 60 Hz	LED lifetime max. °C	50000 h	Corner wall bracket included	No
Power	14,7 W	LED lifetime L70B50 25°C	> 36000 h	CERTIFICATES & EPREL	
SENSOR TECHNOLOGY		SETTINGS		EPREL energy efficiency class	E
With motion detector	No	Base light function	No	EPREL category	Light source
Nevalux sensor technology	On / Off	Main light adjustable	No		


LS 150 white

EAN 4007841069223

FLOODLIGHT WITHOUT SENSOR

Illustrations

TECHNICAL DRAWINGS

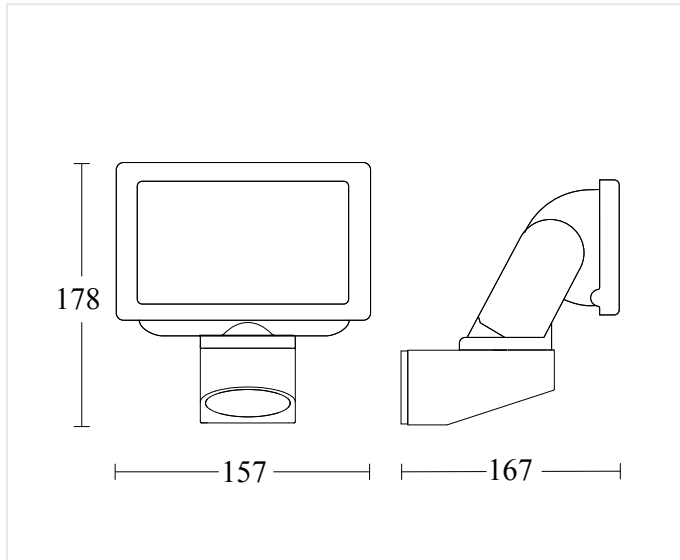

178 x 157 x 178 mm


LS 150 white

FLOODLIGHT WITHOUT SENSOR

EAN 4007841069223

Wiring Diagrams

WIRING DIAGRAM 1

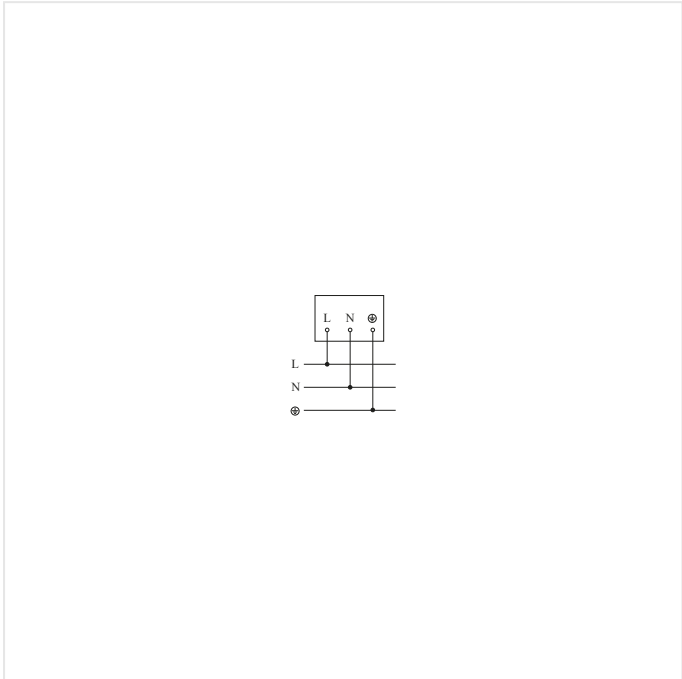

Circuit diagram

LS 150 white

EAN 4007841069223

FLOODLIGHT WITHOUT SENSOR


Highlights



Including STEINEL LED system



UV-resistant plastic

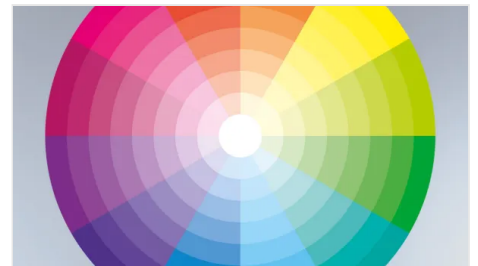

Colour rendering index Ra $\geq$ 80



Optional corner wall mount bracket

LS 150 white

FLOODLIGHT WITHOUT SENSOR

EAN 4007841069223

Accessories

ORDERING INFORMATION

Art.-Nr.	069223
EAN	4007841069223
Typ	LS 150 white

neva

lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss