

L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

neva
lux

EAN 4007841007874

- Outdoor light with motion detector with high-quality stainless steel base and opal glass
- Perfect complement to the GL 60 S floor and path luminaire
- Automatic light thanks to 240 ° Infrared sensor with up to 12 m detection of movement
- Functions: pleasant soft light start, 4 hours continuous light
- Incl. E27 LED bulb with warm white light (3000 K) with 703 lm at 9,87 W
- Incl. mounting accessories - plastic-free packaging

177 x 102 x 426 mm



L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007874

Technical Data

IDENTIFICATION	
PU1 EAN	4007841007874
Material number	110034357
SAP designation	LED AUSSENLEUCHTE L 260 S
Product name data sheet	L 260 S
Product category	Sensor-switched LED outdoor light
Discount group	AH
Source	Steinel Excel
Product status	Normal
Manufacturer	Steinel
DIMENSIONS	
Dimensions L x W x H	177 x 102 x 426 mm
PU1 net weight	1.736
ELECTRICAL	
Mains connection	230 – 240 V / 50 Hz
Power	9,87 W
SENSOR TECHNOLOGY	
Max. mounting height	6,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	240 °
Opening angle	180 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes

Electronic scalability	No
Mechanical scalability	No
Radial range	r = 6 m (75 m²)
Tangential range	r = 12 m (302 m²)
Mounting height	1,80 – 6,00 m
Optimal mounting height	2 m
CONNECTIVITY	
Networking	No
Slave mode adjustable	No
LIGHTING TECHNOLOGY	
Measured luminous flux 360°	703 lm
Efficiency	71,2 lm/W
Colour temperature	3000 K
LED colour deviation	SDCM3
Colour rendering index	80-89
With illuminant	Yes, LED lamp
Illuminant	LED can be replaced
Base	E27
LED cooling system	Passive Thermo Control
Soft light start	Yes
Continuous light	selectable, 4h
LIFETIME	
LED lifetime max. °C	25000 h
SETTINGS	
Twilight switch	Yes

Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Base light function	No
Settings via	Potentiometers
With remote control	No
HOUSING & MATERIAL	
Impact resistance	IK03
Protection class (IP)	IP44
Protection class	I
Ambient temperature	from -20 up to 50 °C
Housing material	Stainless steel
Cover material	Glass opal
Cover material (scope of delivery)	shrouds
Mounting location	wall
Application location	Outdoors
Mounting type	Surface wiring
Application room	outdoors front door all round the building terrace / balcony courtyard & driveway
Colour	Silver
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	3 years
CERTIFICATES & EPREL	
EPREL category	Surrounded product with separate light source (e.g. E27)


L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007874

Illustrations

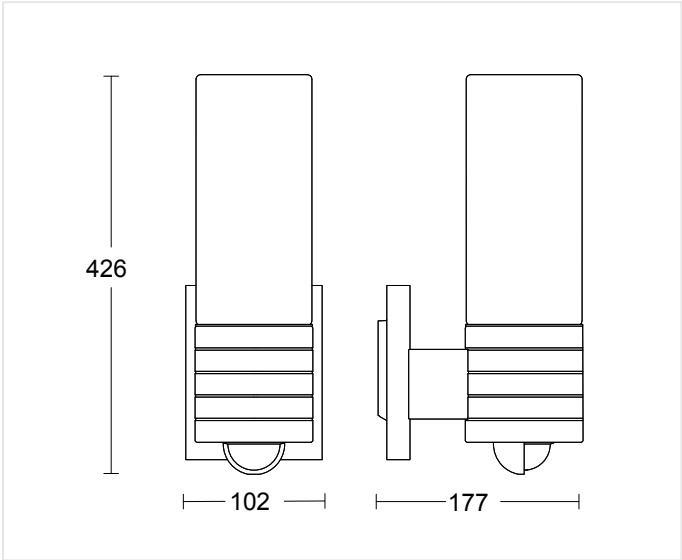TECHNICAL DRAWINGS



177 x 102 x 426 mm

MOUNTING HEIGHT

1,80 – 6,00 m BEREICH	2 m OPTIMAL	6,00 m MAX
--------------------------	----------------	---------------


L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007874

Wiring Diagrams

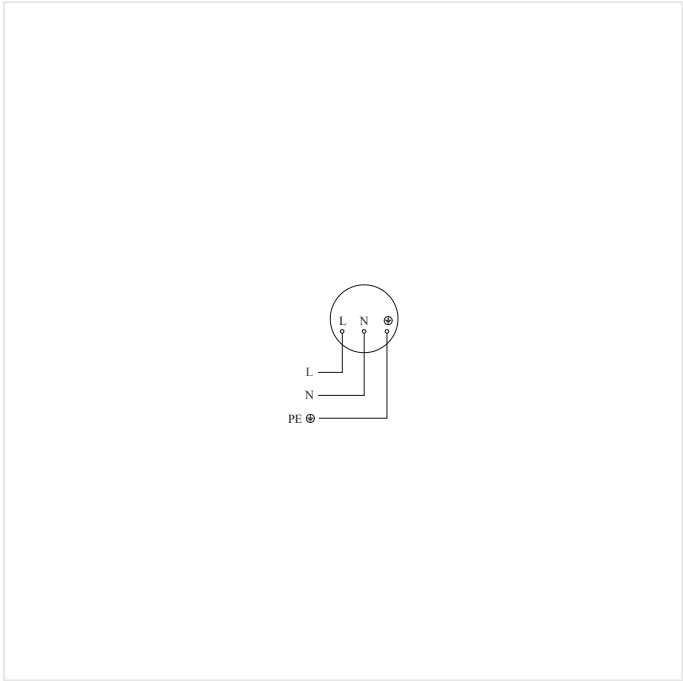WIRING DIAGRAM 1






Circuit diagram

L 260 S

EAN 4007841007874

SENSOR-SWITCHED LED OUTDOOR LIGHT

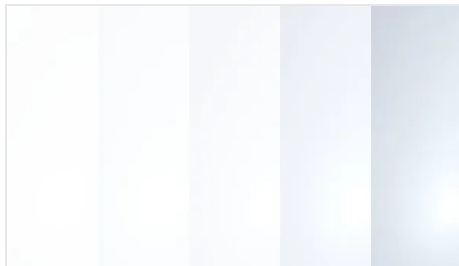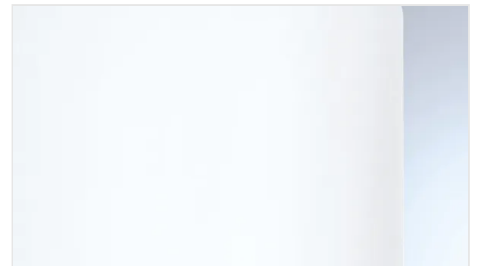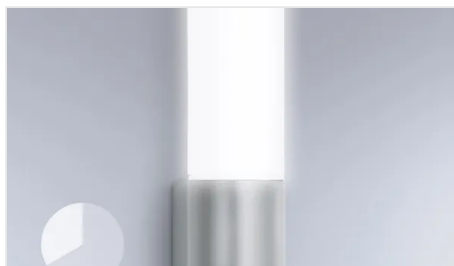Highlights

**Intelligent soft light start****High-quality stainless steel****High-quality opal glass shade****Including innovative LED lamp****4-hour manual override (optional)**

L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007874

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841008314	LED Leuchtstab L 260 S	Accessory
 4007841001353	Ersatzglas für L 260 S	Spare Part

ORDERING INFORMATION

Art.-Nr.

007874

EAN

4007841007874

Typ

L 260 S

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss