

PD IR 4360-8 DALI-2 Input Device - in-ceiling installation, white

neva
lux**MOTION AND PRESENCE DETECTOR****EAN 4007841085735**

- Our series for the common ranges
- Presence detector with 8 m motion detection and 6 m presence detection for integration into a DALI-2 lighting management system
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Transmission of presence and brightness value information to a DALI-2 Application Controller or a BMS
- External approval and measurement in accordance with sensNORM and DALI-2 certified according to IEC 62386

109 x 109 mm



PD IR 4360-8 DALI-2 Input Device - in-ceiling installation, white

MOTION AND PRESENCE DETECTOR

EAN 4007841085735

Technical Data

IDENTIFICATION		SENSOR TECHNOLOGY		Twilight setting teach	
PU1 EAN	4007841085735	Max. mounting height	4,00 m		No
Material number	110091476	Sensor technology	passive infrared	HOUSING & MATERIAL	
SAP designation	PRAESENZMELDER PD IR 4360-8DALI2-IPDDEWS	With motion detector	Yes	Protection class (IP)	IP20
Version	Motion and Presence Detector	Detection angle	360 °	Ambient temperature	from -20 up to 50 °C
Product name data sheet	PD IR 4360-8 DALI-2 Input Device - in-ceiling installation, white	Sneak-under protection	Yes	Housing material	Plastic
Product category	Motion and Presence Detector	Segment-by-segment masking	Yes	Cover material	Other
Discount group	P	Electronic scalability	No	Cover material (scope of delivery)	shrouds
Source	Steinel Excel	Mechanical scalability	No	Mounting location	ceiling
Product status	Normal	Radial range	Ø 4.5 m (16 m²)	Application location	Indoors
Manufacturer	Steinel	Tangential range	Ø 8 m (50 m²)	Mounting type	In-ceiling installation
DIMENSIONS		Switching zones	492 switching zones	Material	Plastic
Dimensions L x W x H	109 x 109 x 109 mm	Mounting height	2 – 4 m	Application room	one-person office function room / ancillary room Indoors warehouse
Dimensions Ø x H	109 x 109 mm	Presence range	Ø 6 m (28 m²)	Colour	white
PU1 net weight	0.194	Optimal mounting height	2,8 m	RAL colour	9010
ELECTRICAL		Nevalux sensor technology	DALI 2	SCOPE OF DELIVERY & WARRANTY	
Supply voltage detail	DALI bus	CONNECTIVITY		Manufacturer warranty	5 years
Max. current consumption per IEC 62386-101	84 mA	Type of networking	Master/master	Corner wall bracket included	No
Typical current consumption at 16 V input voltage	12 mA	Networking via	Cable	CERTIFICATES & EPREL	
Max. current consumption at 10 V input voltage in regular operation	17 mA	With bus coupler	Yes	Certificates	DALI-2
		SETTINGS			
		Functions	Motions sensor Light sensor Presence function Presence detector logic		
		Settings via	Bus		
		With remote control	No		


PD IR 4360-8 DALI-2 Input Device - in-ceiling installation, white

MOTION AND PRESENCE DETECTOR

EAN 4007841085735

Illustrations

TECHNICAL DRAWINGS

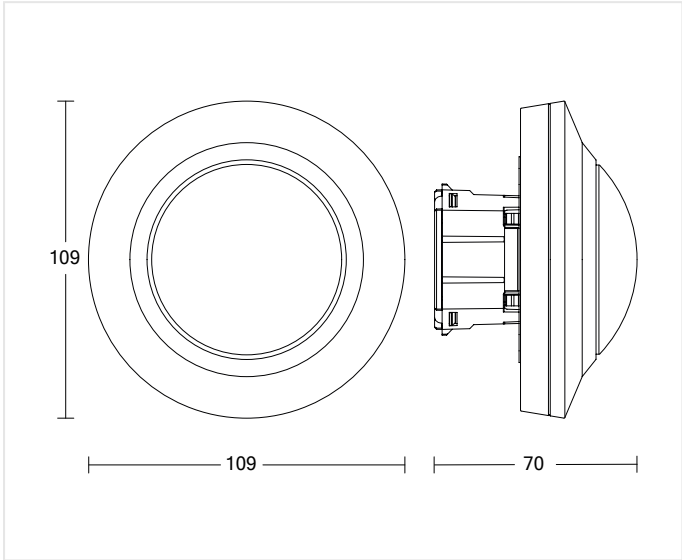

109 x 109 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---------------------------------------	-------------------------------------	----------------------------------


PD IR 4360-8 DALI-2 Input Device - in-ceiling installation, white

MOTION AND PRESENCE DETECTOR

EAN 4007841085735


Wiring Diagrams

WIRING DIAGRAM 1

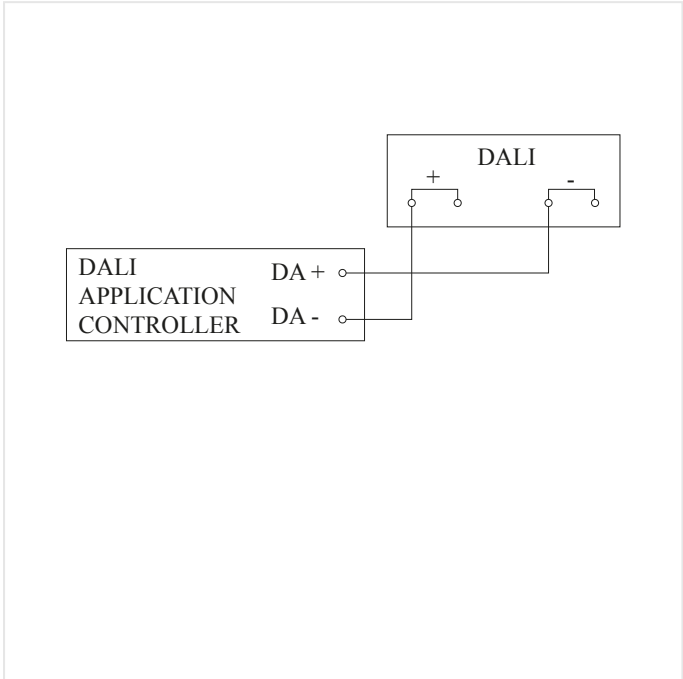

Circuit diagram

WIRING DIAGRAM 2

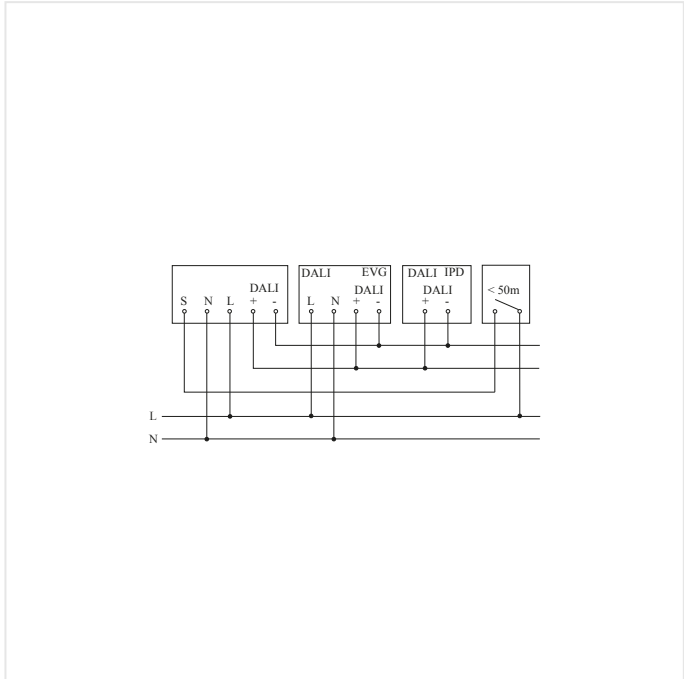

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

PD IR 4360-8 DALI-2 Input Device - in-ceiling installation, white

MOTION AND PRESENCE DETECTOR

EAN 4007841085735

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

085735

EAN

4007841085735

Typ

PD IR 4360-8 DALI-2 Input Device - in-ceiling installation, white

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss