

RS PRO A20 SC Neutral white white


SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841088323

- Ideal for demanding environments such as pergolas or similar applications
- Non-visible high-frequency sensor with ø8 m range, 4000 K, 1514 lm, 12,4 W, 122,1 lm/W
- Robust aluminium housing with high impact resistance IK10 and protection class IP54
- Simple networking via Bluetooth Mesh Connect and commissioning via STEINEL Connect app
- Benefits of the Connected Lighting System and cross-range networking possible
- With plug-in terminals for easy installation

262 x 69 mm

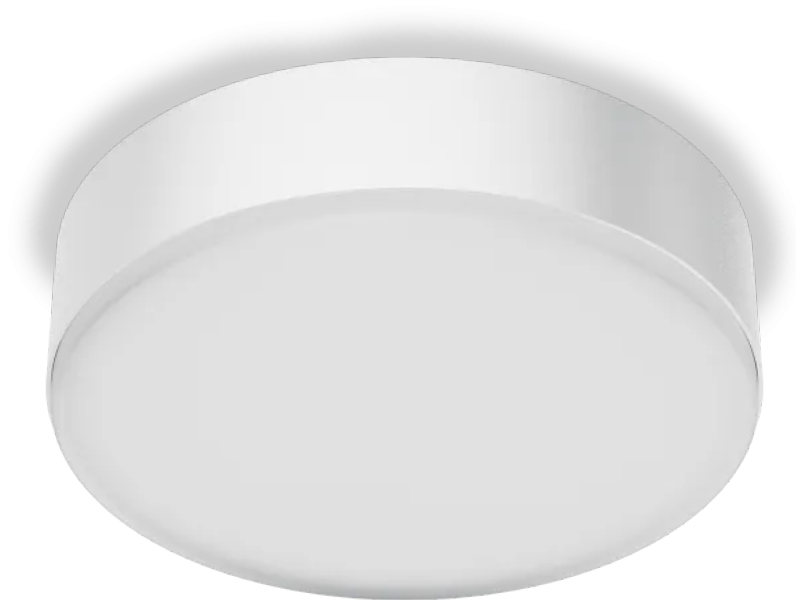

RS PRO A20 SC Neutral white white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841088323

Technical Data

IDENTIFICATION		Nevalux sensor technology		BT SIG Mesh		Settings via		Bluetooth App	
PU1 EAN		4007841088323				With remote control		No	
Material number		110098225				Twilight setting teach		Yes	
SAP designation		INNENLEUCHTE RS PRO A20 NW SC WS				Base light function in percent		0 – 100 %	
Product name data sheet		RS PRO A20 SC Neutral white white				Base light function percent from		0	
Product category		Sensor-switched LED indoor light				Base light function percent to		100	
Discount group		DL							
Source		Steinel Excel							
Product status		Normal							
Manufacturer		Steinel							
DIMENSIONS				CONNECTIVITY				HOUSING & MATERIAL	
Dimensions Ø × H		262 x 69 mm		Networking		Yes		Impact resistance	
PU1 net weight		1.29		Type of networking		Master/master		Protection class (IP)	
				Networking via		Bluetooth Mesh		Protection class	
				Slave mode adjustable		Yes		Ambient temperature	
				LIGHTING TECHNOLOGY				Housing material	
				Measured luminous flux 360°		1514 lm		Cover material	
				Colour temperature		4000 K		Mounting location	
				LED colour deviation		SDCM3		Application location	
				With illuminant		Yes, STEINEL LED system		Mounting type	
				Illuminant		LED cannot be replaced		Application room	
				Base		without		corridor / aisle function room / ancillary room warehouse kitchenette stairwell changing room WC / washroom	
				LED cooling system		Passive Thermo Control		Colour	
				Soft light start		Yes		Protection class ceiling	
				Continuous light		selectable			
				Efficiency without cover		165,48 lm/W		SCOPE OF DELIVERY & WARRANTY	
				LIFETIME				Manufacturer warranty	
				LED lifetime L70B50 25°C		> 60000 h		House number sheet included	
				LED lifetime per IEC 62717 L70		> 60.000 Std.		CERTIFICATES & EPREL	
				SETTINGS				EPREL category	
				Twilight switch		Yes		Surrounded product with integrated light source	
				Twilight setting		2 – 2000 lx			
				Time setting		10 s – 60 Min.			
				Base light function		Yes			
				Base light function time		1-60 min			
				Main light adjustable		0 - 100 %			
				Functions		Selecting programmed lighting scenarios Motions sensor DIM function Adjustable fade time when switching on and off Semi-/fully automatic Neighbouring group function Encrypted communication Timer			
</									


RS PRO A20 SC Neutral white white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841088323

Illustrations

TECHNICAL DRAWINGS

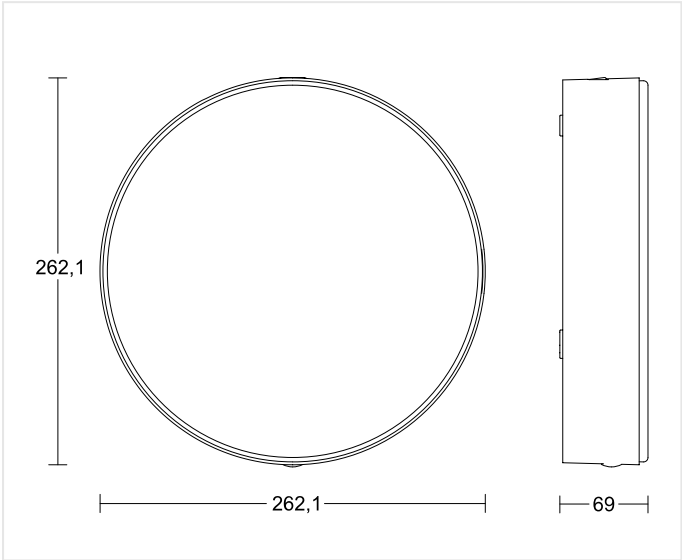

262 x 69 mm

MOUNTING HEIGHT

2,00 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

RS PRO A20 SC Neutral white white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841088323

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221386	Universal P-Set 3S	Suspension cable

ORDERING INFORMATION

Art.-Nr.

088323

EAN

4007841088323

Typ

RS PRO A20 SC Neutral white white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss