

Hallway KNX - in-ceiling installation

PRESENCE DETECTOR

neva
lux

EAN 4007841079475

105 x 103 x 103 mm



Hallway KNX - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079475

Technical Data

IDENTIFICATION		Detection		also through glass, wood and stud walls	Continuous light	selectable
PU1 EAN	4007841079475	Detection angle	360 °		Constant light regulation	Yes
Material number	110082767	Opening angle	140 °		SETTINGS	
SAP designation	PRAESENZMELDER HALLWAY KNX V3.5 DE	Sneak-under protection	Yes		Twilight switch	Yes
Version	Presence detector	Segment-by-segment masking	No		Twilight setting	10 – 1000 lx
Product name data sheet	Hallway KNX - in-ceiling installation	Electronic scalability	Yes		Time setting	10 s – 1092 Min.
Product category	Presence detector	Mechanical scalability	No		Base light function	Yes
Discount group	TPK	Radial range	25 x 3 m (75 m²)		Main light adjustable	0 - 100 %
Source	Steinel Excel	Tangential range	25 x 3 m (75 m²)		Settings via	ETS software Bluetooth Bus
Product status	Normal	Mounting height	2 – 4 m		With remote control	No
Manufacturer	Steinel	Optimal mounting height	2,8 m		Twilight setting teach	Yes
DIMENSIONS		Nevalux sensor technology	BT Open Mesh, KNX		HOUSING & MATERIAL	
Dimensions L x W x H	105 x 103 x 103 mm	CONNECTIVITY			Protection class (IP)	IP20
PU1 net weight	0.185	Networking	Yes		Ambient temperature	from -25 up to 50 °C
ELECTRICAL		Type of networking	Master/master Master/slave		Mounting location	ceiling
Mains connection	30 V	Networking via	KNX bus		Application location	Indoors
Own consumption	0,7 W	KNX functions	Comfort Photo-cell controller Individual pyro evaluation Basic light level function Light level HVAC output Constant-lighting control Light output 4x Presence output Day / night function Dewpoint Logic gate Humidity output Temperature output		Mounting type	In-ceiling installation
Supply voltage detail	KNX bus				Material	Plastic
SENSOR TECHNOLOGY					Application room	Indoors corridor / aisle
Max. mounting height	4,00 m				Colour	white
Sensor technology	High frequency				RAL colour	9003
Transmission power	< 1 mW				SCOPE OF DELIVERY & WARRANTY	
HF technology	5,8 GHz	With bus coupler	Yes		Manufacturer warranty	5 years
With motion detector	Yes	LIGHTING TECHNOLOGY			Corner wall bracket included	No
		Soft light start	Yes			


Hallway KNX - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079475

Illustrations

TECHNICAL DRAWINGS

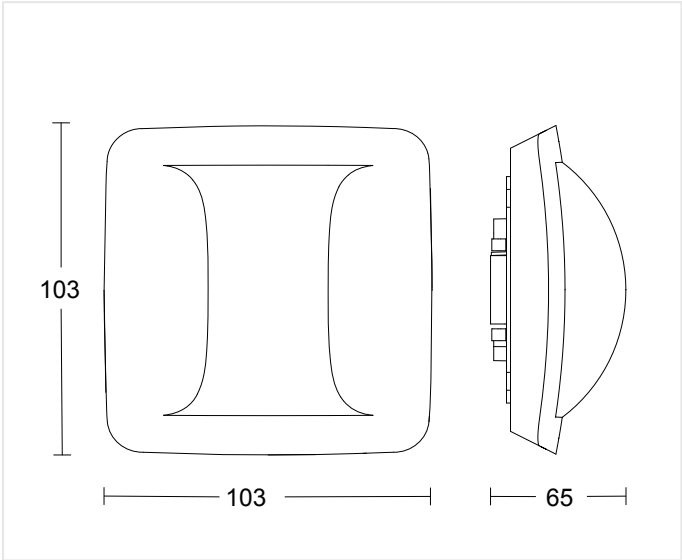

105 x 103 x 103 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------

Hallway KNX - in-ceiling installation

EAN 4007841079475

PRESENCE DETECTOR

Highlights



UV-resistant plastic

Hallway KNX - in-ceiling installation

EAN 4007841079475

PRESENCE DETECTOR

Accessories

ORDERING INFORMATION

Art.-Nr. 079475

EAN 4007841079475

Typ Hallway KNX - in-ceiling installation

**neva
lux**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss