

PD IR 4360-24 DALI-2 Input Device - Surface wiring black

neva
lux**MOTION AND PRESENCE DETECTOR****EAN 4007841085834**

- Our series for the common ranges
- Presence detector with 24 m motion detection and 7.5 m presence detection for integration into a DALI-2 lighting management system
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Transmission of presence and brightness value information to a DALI-2 Application Controller or a BMS
- External approval and measurement in accordance with sensNORM and DALI-2 certified according to IEC 62386

129 x 70 mm



PD IR 4360-24 DALI-2 Input Device - Surface wiring black

EAN 4007841085834

MOTION AND PRESENCE DETECTOR

Technical Data

IDENTIFICATION		SENSOR TECHNOLOGY		With remote control	
PU1 EAN	4007841085834	Max. mounting height	10,00 m	Twilight setting teach	No
Material number	110091490	Sensor technology	passive infrared		
SAP designation	PRAESENZMELDER PD IR4360-24DALI2-IPDAPSW	With motion detector	Yes	HOUSING & MATERIAL	
Version	Motion and Presence Detector	Detection angle	360 °	Protection class (IP)	IP54
Product name data sheet	PD IR 4360-24 DALI-2 Input Device - Surface wiring black	Sneak-under protection	Yes	Ambient temperature	from -20 up to 50 °C
Product category	Motion and Presence Detector	Segment-by-segment masking	Yes	Housing material	Plastic
Discount group	P	Electronic scalability	No	Cover material	Other
Source	Steinel Excel	Mechanical scalability	No	Cover material (scope of delivery)	shrouds
Product status	Normal	Radial range	Ø 5.5 m (24 m²)	Mounting location	ceiling
Manufacturer	Steinel	Tangential range	Ø 24 m (452 m²)	Application location	Indoors
DIMENSIONS		Switching zones	1436 switching zones	Mounting type	Surface wiring
Dimensions L × W × H	70 x 129 x 129 mm	Mounting height	2 – 10,00 m	Material	Plastic
Dimensions Ø × H	129 x 70 mm	Presence range	Ø 7.5 m (44 m²)	Application room	one-person office function room / ancillary room Indoors warehouse
PU1 net weight	0.244	Optimal mounting height	2,8 m	Colour	black
ELECTRICAL		Nevalux sensor technology	DALI 2	RAL colour	9005
Supply voltage detail	DALI bus	CONNECTIVITY		SCOPE OF DELIVERY & WARRANTY	
Max. current consumption per IEC 62386-101	84 mA	Type of networking	Master/master	Manufacturer warranty	5 years
Typical current consumption at 16 V input voltage	12 mA	Networking via	Cable	Corner wall bracket included	No
Max. current consumption at 10 V input voltage in regular operation	17 mA	With bus coupler	Yes	CERTIFICATES & EPREL	
		SETTINGS		Certificates	DALI-2
		Functions	Motions sensor Light sensor Presence function Presence detector logic		
		Settings via	Bus		


PD IR 4360-24 DALI-2 Input Device - Surface wiring black

MOTION AND PRESENCE DETECTOR

EAN 4007841085834

Illustrations

TECHNICAL DRAWINGS

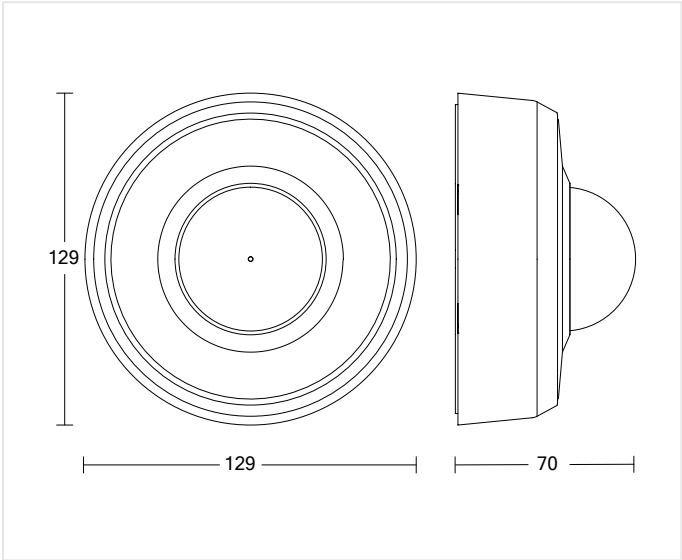

129 x 70 mm

MOUNTING HEIGHT

2 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
------------------------	------------------	----------------


PD IR 4360-24 DALI-2 Input Device - Surface wiring black

EAN 4007841085834

MOTION AND PRESENCE DETECTOR


Wiring Diagrams

WIRING DIAGRAM 1

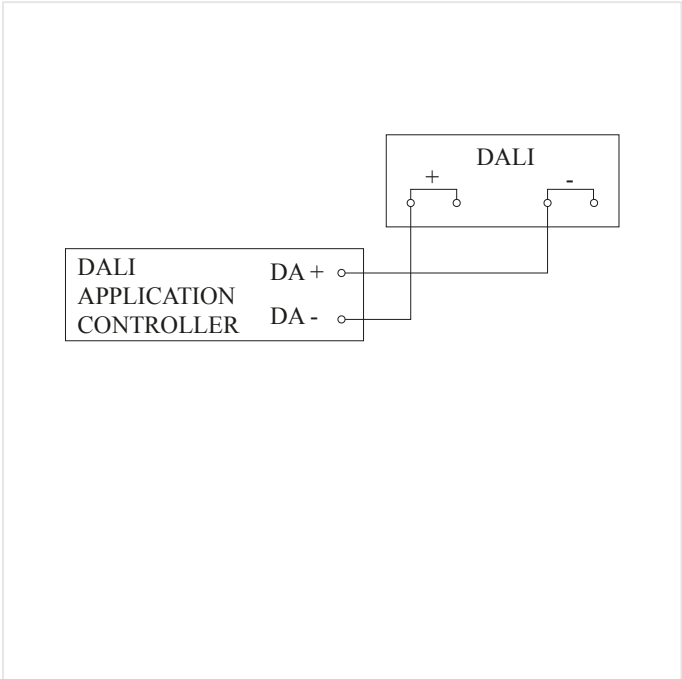

Circuit diagram

WIRING DIAGRAM 2

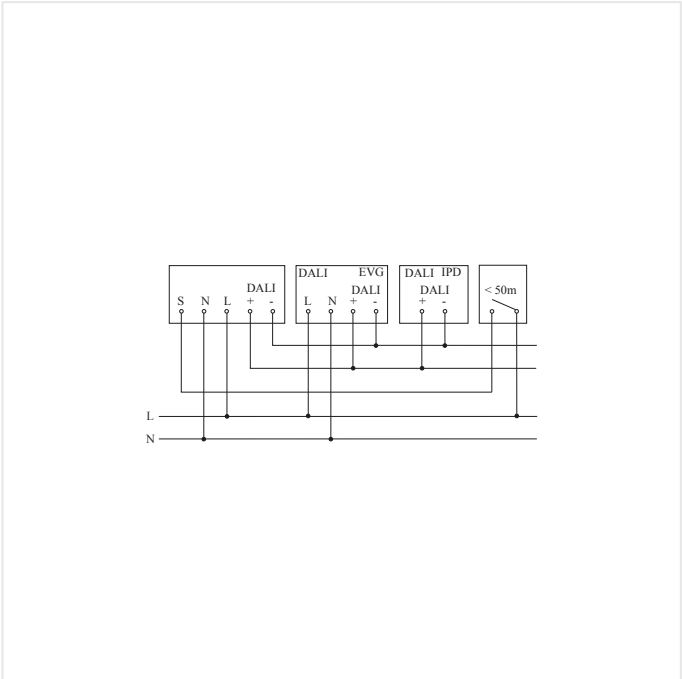

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

PD IR 4360-24 DALI-2 Input Device - Surface wiring black

MOTION AND PRESENCE DETECTOR

EAN 4007841085834

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

085834

EAN

4007841085834

Typ

PD IR 4360-24 DALI-2 Input Device - Surface wiring black

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss