

MD IR 4360-8 COM1 - Concealed wiring

neva
lux

MOTION DETECTOR

EAN 4007841086893

- Our series for the common ranges
- Motion detector with 8 m range for switching light
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Key input and parallel switching of multiple sensors to expand the detection range
- External approval and measurement in accordance with sensNORM

109 x 69 mm



MD IR 4360-8 COM1 - Concealed wiring

MOTION DETECTOR

EAN 4007841086893

Technical Data

IDENTIFICATION		Sensor technology		passive infrared		Main light adjustable		No	
PU1 EAN	4007841086893	With motion detector			Yes	Functions	Motions sensor	Light sensor	Yes
Material number	110093182	Detection angle			360 °		Semi-/fully automatic	Potentiometer	Relay output
SAP designation	BEWEGUNGSMELDER MD IR 4360-8 COM1 UP WS	Sneak-under protection			Yes		Normal / test mode		
Version	Motion detectors	Segment-by-segment masking			Yes	Settings via	Remote control	Smart Remote	Potentiometers
Product name data sheet	MD IR 4360-8 COM1 - Concealed wiring	Electronic scalability			No	With remote control	No		
Product category	Motion detector	Mechanical scalability			No	Twilight setting teach	Yes		
Discount group	B	Radial range			Ø 4.5 m (16 m²)	HOUSING & MATERIAL			
Source	Steinel Excel	Tangential range			Ø 8 m (50 m²)	Protection class (IP)	IP20		
Product status	Normal	Switching zones			492 switching zones	Ambient temperature	from -20 up to 50 °C		
Manufacturer	Steinel	Mounting height			2 – 4 m	Housing material	Plastic		
DIMENSIONS		Optimal mounting height			2,8 m	Cover material	Other		
Dimensions Ø × H	109 x 69 mm	Nevalux sensor technology			On / Off	Cover material (scope of delivery)	shrouds		
PU1 net weight	0.167	CONNECTIVITY				Mounting location	ceiling		
ELECTRICAL		Networking			Yes	Application location	Indoors		
Mains connection	50 – 60 Hz	Type of networking			Master/master	Mounting type	Concealed wiring		
Switching output 1 resistive	2000 W	Networking via			Cable	Material	Plastic		
LED lamps > 8 W	500 W	LIGHTING TECHNOLOGY				Application room	one-person office function room / ancillary room Indoors warehouse		
Capacitive load in µF	176 µF	Soft light start			Yes	Colour	white		
Switching output 1 number of LED/fluorescent lamps	50	Constant light regulation			No	RAL colour	9010		
Maximum inrush current	800 A	SETTINGS				SCOPE OF DELIVERY & WARRANTY			
SENSOR TECHNOLOGY		Twilight switch			Yes	Manufacturer warranty	5 years		
Max. mounting height	4,00 m	Twilight setting			2 – 1000 lx	Corner wall bracket included	No		
		Time setting			5 s – 60 Min.				


MD IR 4360-8 COM1 - Concealed wiring

MOTION DETECTOR

EAN 4007841086893

Illustrations

TECHNICAL DRAWINGS

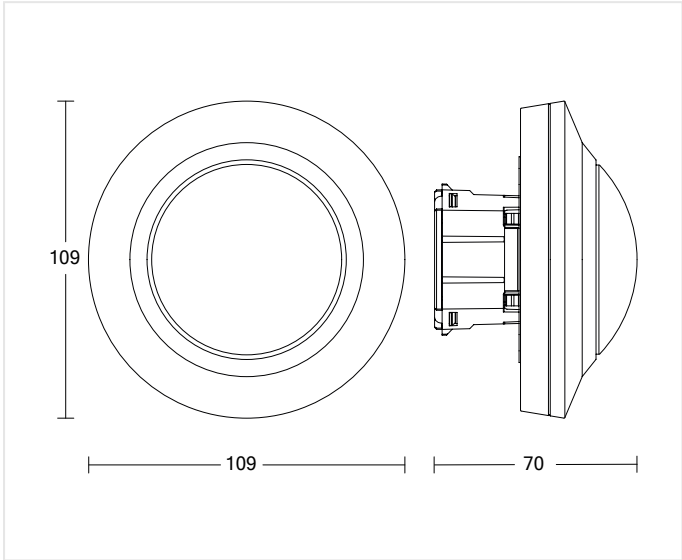

109 x 69 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---------------------------------------	-------------------------------------	----------------------------------


MD IR 4360-8 COM1 - Concealed wiring

EAN 4007841086893

MOTION DETECTOR


Wiring Diagrams

WIRING DIAGRAM 1

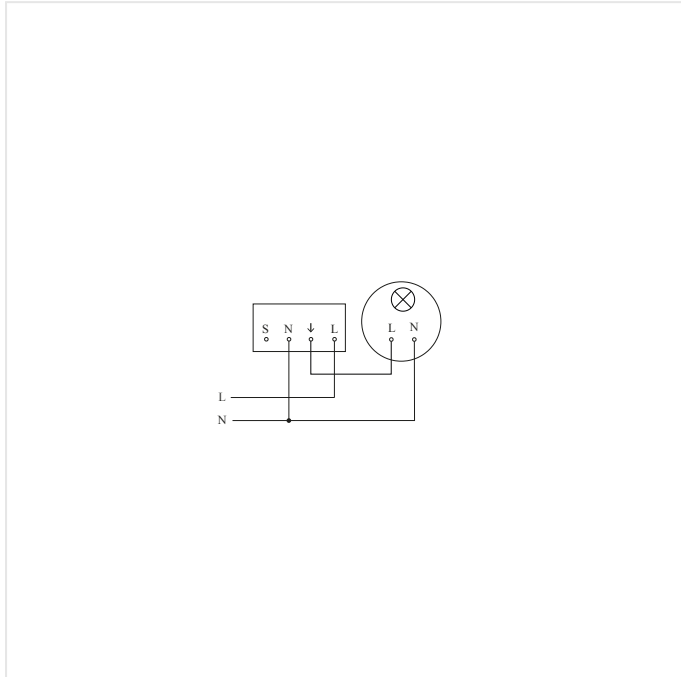

Circuit diagram

WIRING DIAGRAM 2

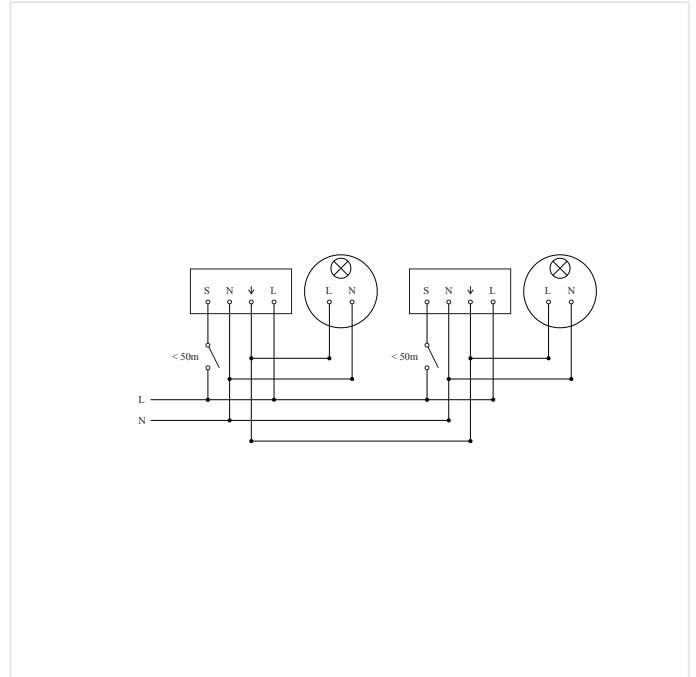

Circuit diagram for interconnecting max. 10 sensors

MD IR 4360-8 COM1 - Concealed wiring

MOTION DETECTOR

EAN 4007841086893

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

086893

EAN

4007841086893

Typ

MD IR 4360-8 COM1 - Concealed wiring

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss