

XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

neva
lux

EAN 4007841068080

161 x 180 x 199 mm



XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841068080

Technical Data

IDENTIFICATION		CONNECTIVITY		HOUSING & MATERIAL	
PU1 EAN	4007841068080	Networking	No	Impact resistance	IK03
Material number	110080869	LIGHTING TECHNOLOGY		Protection class (IP)	IP44
SAP designation	LED STRAHLER XLED PRO 240 ANT	Measured luminous flux 360°	2124 lm	Protection class	II
Product name data sheet	XLED PRO 240 Anthracite	Colour temperature	3000 K	Ambient temperature	from -20 up to 40 °C
Product category	LED floodlight without sensor	LED colour deviation	SDCM3	Housing material	HCMC
Discount group	S	With illuminant	Yes, STEINEL LED system	Cover material	Plastic, opal
Source	Steinel Excel	Illuminant	LED cannot be replaced	Mounting location	wall corner
Product status	Normal	Base	without	Application location	Outdoors
Manufacturer	Steinel	LED cooling system	HCMC (High Conductive Magnesium Composite)	Mounting type	Surface wiring
DIMENSIONS		Soft light start	No	Application room	outdoors all round the building terrace / balcony courtyard & driveway
Dimensions L x W x H	161 x 180 x 199 mm	Photobiological safety per EN 62471	Sonstige	SCOPE OF DELIVERY & WARRANTY	
PU1 net weight	0.64	LIFETIME		Manufacturer warranty	5 years
ELECTRICAL		LED lifetime L70B50 25°C	> 60000 h	Corner wall bracket included	No
Mains connection	220 – 240 V / 50 – 60 Hz	SETTINGS		CERTIFICATES & EPREL	
Power	19,3 W	Base light function	No	EPREL energy efficiency class	E
SENSOR TECHNOLOGY		Main light adjustable	No	EPREL category	Light source
With motion detector	No				
Nevalux sensor technology	On / Off				


XLED PRO 240 Anthracite

EAN 4007841068080

LED FLOODLIGHT WITHOUT SENSOR

Illustrations

TECHNICAL DRAWINGS

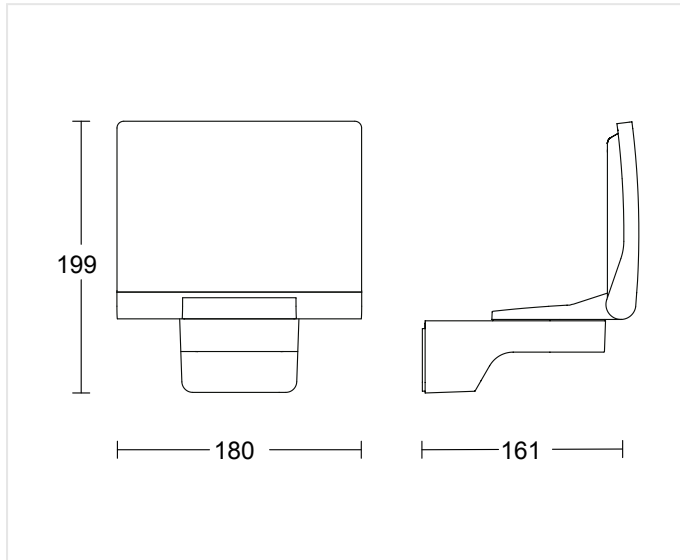

161 x 180 x 199 mm


XLED PRO 240 Anthracite

EAN 4007841068080

LED FLOODLIGHT WITHOUT SENSOR

Wiring Diagrams

WIRING DIAGRAM 1

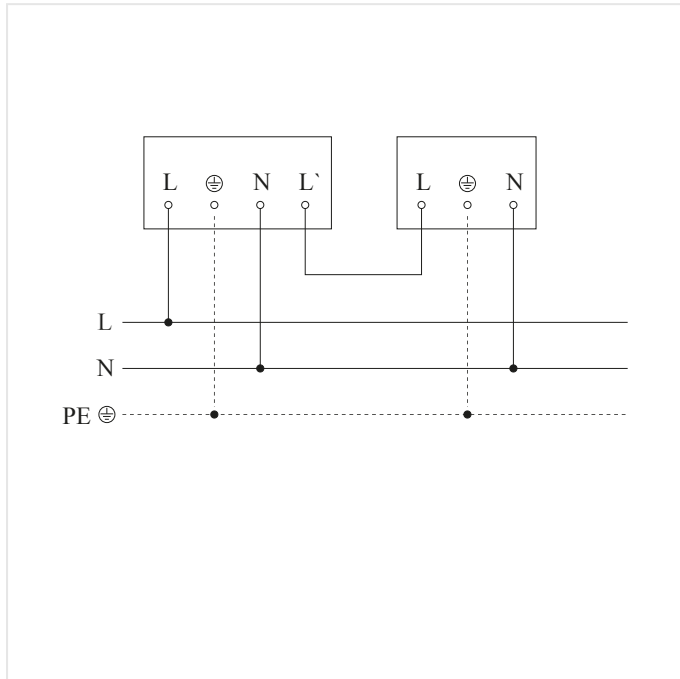


Master/slave interconnection circuit diagram

XLED PRO 240 Anthracite

EAN 4007841068080

LED FLOODLIGHT WITHOUT SENSOR

Highlights

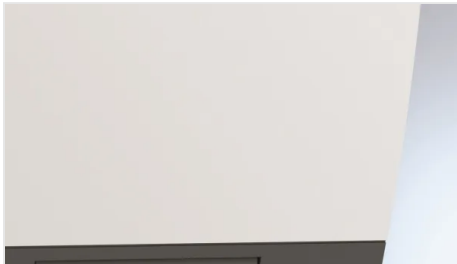


Including STEINEL LED system




HCMC cooling system




UV-resistant plastic

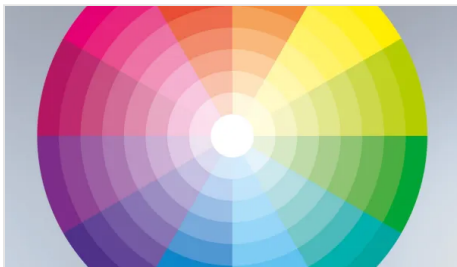

Colour rendering index Ra ≥ 80

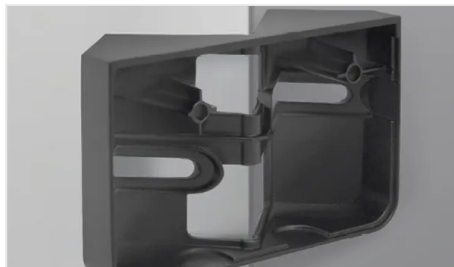

Optional corner wall mount

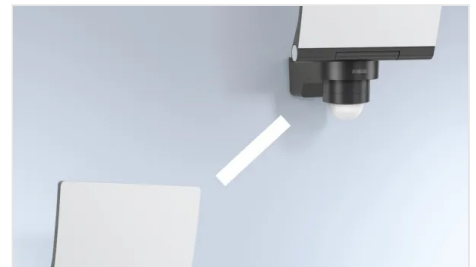

Can be interconnected with slave version

XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841068080

Accessories

ORDERING INFORMATION	
Art.-Nr.	068080
EAN	4007841068080
Typ	XLED PRO 240 Anthracite
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	