

Hallway IP - concealed

PRESENCE DETECTOR



EAN 4007841086435

- Perfect radial detection with a range of up to 25 m, ideal for long corridors and hallways
- Customisable range that can be set individually in both directions
- Control PRO II design for a modern and functional look that enables versatile applications
- Bluetooth technology for simple connection and control via Bluetooth
- Multiple interfaces, compatible with COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD
- External light measurement required for black sensors that can be integrated via Bluetooth or KNX

68 x 103 x 103 mm



Hallway IP - concealed

PRESENCE DETECTOR

EAN 4007841086435

Technical Data

IDENTIFICATION	
PU1 EAN	4007841086435
Material number	110092818
SAP designation	PRAESENZMEL HALLWAY V2 IP UP WS
Version	Presence detector
Product name data sheet	Hallway IP - concealed
Product category	Presence detector
Discount group	TP
Source	Steinel Excel
Product status	Normal
Manufacturer	Steinel
DIMENSIONS	
Dimensions L x W x H	68 x 103 x 103 mm
PU1 net weight	0.165
ELECTRICAL	
Mains connection	18 – 55 V
Supply voltage detail	Passive PoE SELV, standard PoE (IEEE 802.3 af)
SENSOR TECHNOLOGY	
Max. mounting height	4,00 m
Sensor technology	High frequency
Transmission power	< 1 mW

HF technology	5,8 GHz
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	Yes
Mechanical scalability	No
Radial range	25 x 3 m (75 m²)
Tangential range	25 x 3 m (75 m²)
Mounting height	2 – 4 m
Optimal mounting height	2,8 m
Nevalux sensor technology	BT Open Mesh, IP / IT
CONNECTIVITY	
Networking	Yes
Networking via	Bluetooth Mesh
With bus coupler	Yes
LIGHTING TECHNOLOGY	
Soft light start	No
Continuous light	selectable

Constant light regulation	No
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 2000 lx
Base light function	No
Main light adjustable	No
Settings via	Bluetooth Bus
With remote control	No
Twilight setting teach	Yes
HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors corridor / aisle
Colour	white
RAL colour	9003
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No


Hallway IP - concealed

PRESENCE DETECTOR

EAN 4007841086435

Illustrations

TECHNICAL DRAWINGS

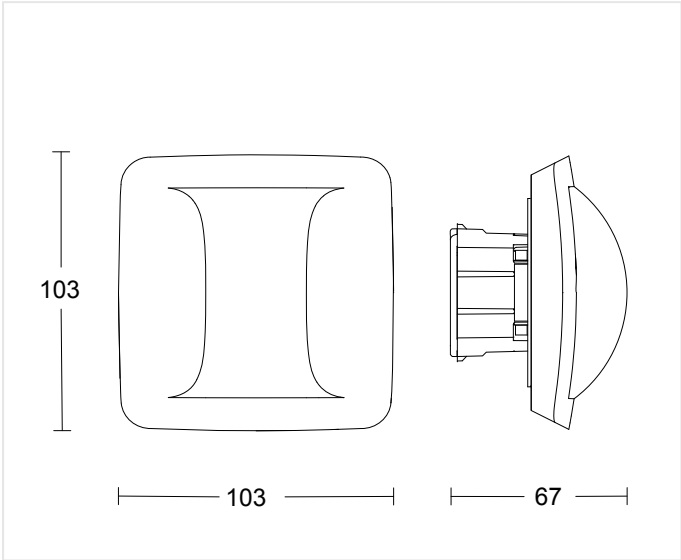

68 x 103 x 103 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------


Hallway IP - concealed

EAN 4007841086435

PRESENCE DETECTOR

Wiring Diagrams

WIRING DIAGRAM 1

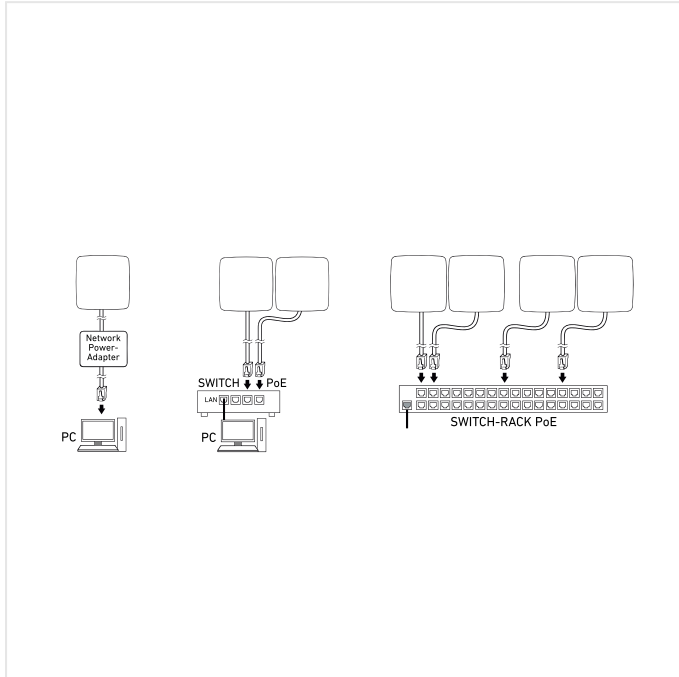

Circuit diagram

Hallway IP - concealed

EAN 4007841086435

PRESENCE DETECTOR

Highlights



UV-resistant plastic

Hallway IP - concealed

PRESENCE DETECTOR

EAN 4007841086435

Accessories

ORDERING INFORMATION

Art.-Nr.	086435
EAN	4007841086435
Typ	Hallway IP - concealed

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss