

L 40 C without motion detector, with Bluetooth

neva
lux

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841085230

- Outdoor light without motion detector, with high-quality, square aluminium housing
- Wireless networking via Bluetooth Mesh and easy setting via STEINEL Connect App
- Functions: adjustable basic and main light (basic light only in combination with a Bluetooth sensor luminaire), scheduling function
- Warm white light (3000 K) and long-life 12,9 W LEDs with 869 lm
- Incl. mounting accessories - plastic-free packaging

105 x 201 x 229 mm



L 40 C without motion detector, with Bluetooth

EAN 4007841085230

LED OUTDOOR LIGHT WITHOUT SENSOR

Technical Data

IDENTIFICATION	
PU1 EAN	4007841085230
Material number	110090344
SAP designation	LED AUSSENLEUCHTE L 40 C ANT
Product name data sheet	L 40 C without motion detector, with Bluetooth
Product category	LED outdoor light without sensor
Discount group	ACH
Source	Steinel Excel
Product status	Normal
Manufacturer	Steinel
DIMENSIONS	
Dimensions L × W × H	105 x 201 x 229 mm
PU1 net weight	1.204
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Power	12,9 W
SENSOR TECHNOLOGY	
With motion detector	No
Nevalux sensor technology	BT SIG Mesh
CONNECTIVITY	
Networking	Yes
Type of networking	Master/master Master/slave
Networking via	Bluetooth Mesh

LIGHTING TECHNOLOGY	
Measured luminous flux 360°	869 lm
Efficiency	67,4 lm/W
Colour temperature	3000 K
Colour rendering index	= 82
With illuminant	Yes, STEINEL LED system
Illuminant	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Continuous light	selectable
LIFETIME	
LED lifetime L70B50 25°C	> 60000 h
Average rated power supply lifetime at 25 °C	> 60000 h
SETTINGS	
Twilight switch	Yes
Base light function	Yes
Base light function detail	only in combination with the SC version
Main light adjustable	5 - 100 %
Settings via	Smartphone Tablet Bluetooth Mesh
With remote control	No
Twilight setting teach	Yes

Base light function in percent	10 – 100 %
Base light function percent from	10
Base light function percent to	100
HOUSING & MATERIAL	
Impact resistance	IK03
Protection class (IP)	IP54
Protection class	I
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mounting location	wall
Application location	Outdoors
Mounting type	Surface wiring
Material	Aluminium
Application room	outdoors front door all round the building terrace / balcony
Colour	Anthracite
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	3 years
House number sheet included	No
CERTIFICATES & EPREL	
EPREL category	Surrounded product with integrated light source


L 40 C without motion detector, with Bluetooth

EAN 4007841085230

LED OUTDOOR LIGHT WITHOUT SENSOR

Illustrations

TECHNICAL DRAWINGS

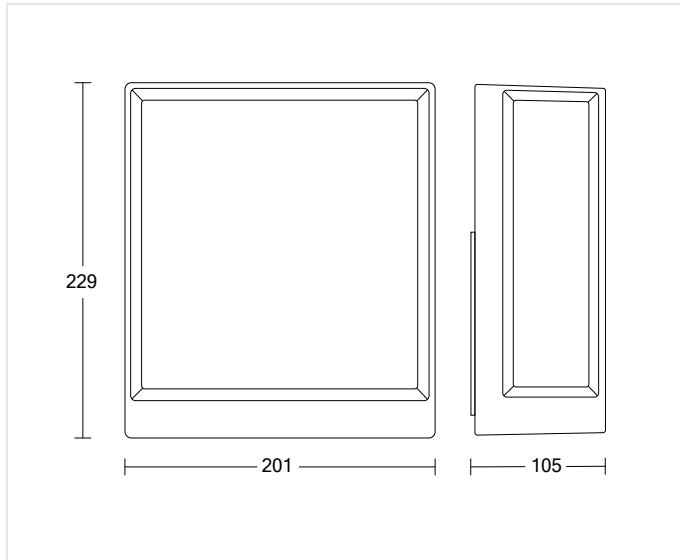

105 x 201 x 229 mm


L 40 C without motion detector, with Bluetooth

EAN 4007841085230

LED OUTDOOR LIGHT WITHOUT SENSOR


Wiring Diagrams

WIRING DIAGRAM 1

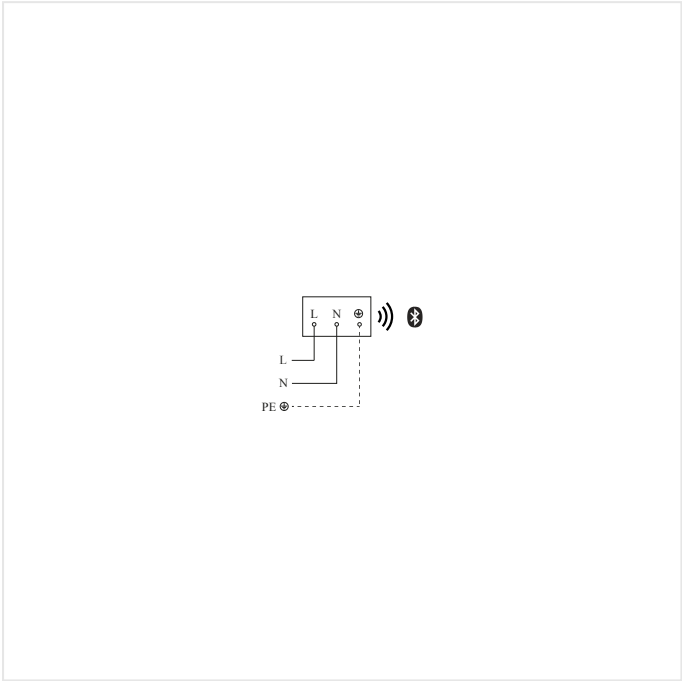

Circuit diagram Bluetooth

WIRING DIAGRAM 2

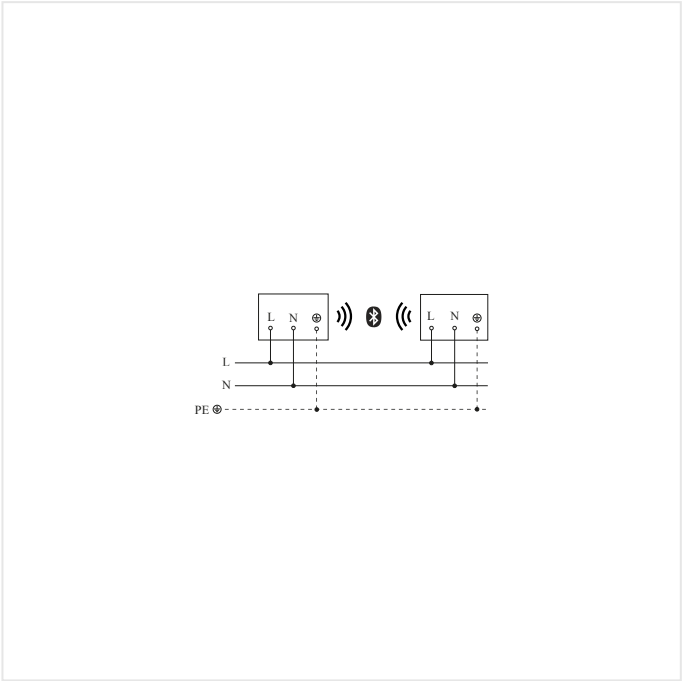

Circuit diagram Bluetooth

L 40 C without motion detector, with Bluetooth

EAN 4007841085230

LED OUTDOOR LIGHT WITHOUT SENSOR


Highlights




Including STEINEL LED system




Intelligent soft light start

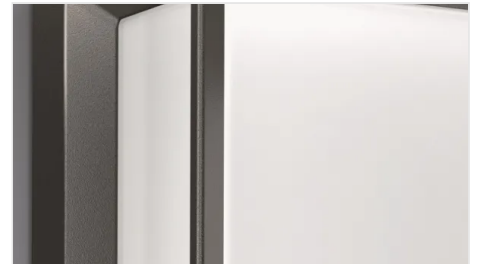


High-quality aluminium

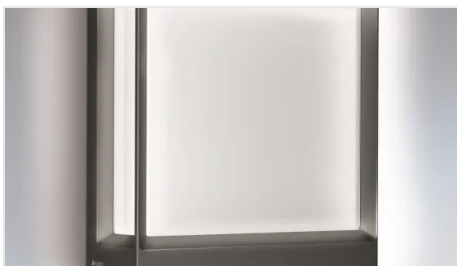


LED ambient light

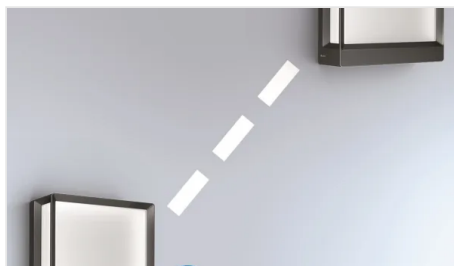

Interconnectable and adjustable via Bluetooth

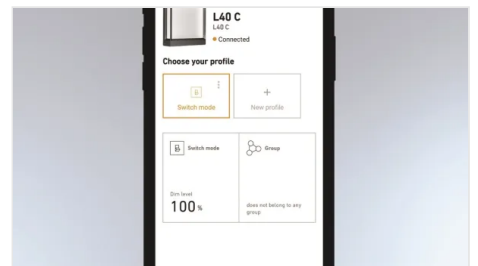

Operatable via app

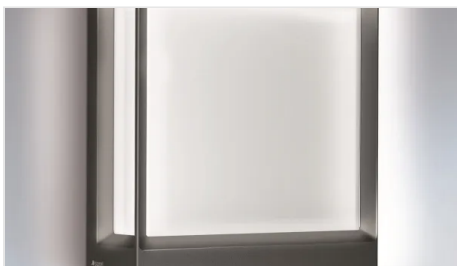

Adjustable main light brightness (5 - 100%)

L 40 C without motion detector, with Bluetooth

EAN 4007841085230

LED OUTDOOR LIGHT WITHOUT SENSOR

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841088620	Funkschalter TapDuo C	System components

ORDERING INFORMATION

Art.-Nr.

085230

EAN

4007841085230

Typ

L 40 C without motion detector, with Bluetooth

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss