

lisha V2 connect PIR C1500 4K

LISHA V2


neva
lux

Product code **221978**

- For universal use for illumination of offices, schools, traffic zones, etc.
- Connect version with IoT lighting control for next generation lighting projects (swarm function, grouping, cleaning light etc.)
- Connect version available with light sensor (LS) or with motion detector and light sensor (PIR)
- Microprismatic diffuser for best possible glare control
- Link technology for seamless extension of the luminaire with continuous wiring
- Variants with 1.2 and 1.5 meter length available
- Housing Aluminium white

neva
lux

1518 x 60 x 80 mm

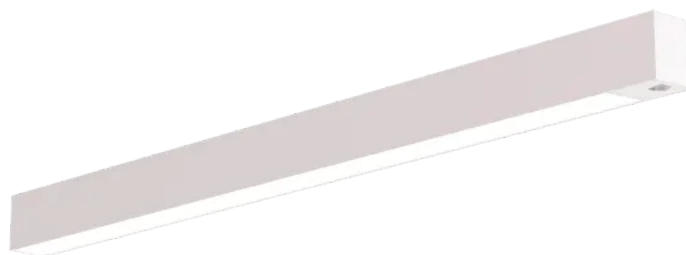

lisha V2 connect PIR C1500 4K

LISHA V2

Product code 221978

Technical Data

DIMENSIONS		With light sensor		Yes	Suitable for light band configuration		Yes
Dimensions L x W x H	1518 x 60 x 80 mm	CONNECTIVITY			With program-controlled lighting control		Yes
ELECTRICAL		With radio network control		Yes	Constant light output control		Yes
Mains connection	200...240 V / 50 – 60 Hz	LIGHTING TECHNOLOGY			HOUSING & MATERIAL		
Power	40 W	Colour temperature		4000 K	Protection class (IP)		IP20
Replaceable driver	Yes	LED colour deviation		SDCM3	Protection class		I
Type of wiring	Through wiring included	Colour rendering index		80-89	Ambient temperature		-20...45 °C
LED rated current	950 mA	Illuminant		LED	Housing material		Aluminum
Maximum number of luminaires per circuit breaker	C10: 35x, C13: 45x, C16: 56x, C20: 70x, B10: 30x, B13: 39x, B16: 48x, B20: 60x	Luminous flux		4800 lm	Cover material		Microprismatic acrylic glass
SENSOR TECHNOLOGY		Beam angle		90°	Mounting type		Ceiling surface-mounted
Sensor technology	passive infrared	Luminaire luminous efficacy		120 lm/W	Colour		white
With motion detector	Yes	Glare value		UGR < 22	SCOPE OF DELIVERY & WARRANTY		
Detection angle	360 °	LIFETIME			Manufacturer warranty		5 years
Radial range	4 x 4 m (16 m²)	LED lifespan (25 °C)		50000 h	CERTIFICATES & EPREL		
Tangential range	6 x 6 m (36 m²)	SETTINGS			EPREL energy efficiency class		E
Presence range	4 x 4 m (16 m²)	DALI dimming		Yes			
		With emergency light		No			

lisha V2 connect PIR C1500 4K

LISHA V2

Product code 221978

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221642	lisha V2 Diffusor 1M	Cover
 221772	lisha V2 Link C	Coupler/connector straight
 221618	Emergency Package 1h (50V/3.5W)	Emergency lighting
 221570	Connect TK2 BLM	Pushbutton interface
 221591	Smartlink T-Board PB4	Wireless push-button
 221970	Bluetooth EDIZIO.liv SNAPFIX Low Energy PB2	Wireless push-button
 221971	Bluetooth EDIZIO.liv SNAPFIX Low Energy PB4	Wireless push-button

ORDERING INFORMATION

Art.-Nr.

221978

Typ

lisha V2 connect PIR C1500 4K

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss