


# zwena connect LS C350 3K

ZWENA CONNECT C

neva  
lux

- For universal use for illumination of offices, schools, traffic zones, etc.
- Optionally as an intelligent Connect version with or without motion sensor, or as a conventional DALI luminaire
- Connect version with IoT lighting control for next generation lighting projects (swarm function, grouping, cleaning light etc.)
- High quality finish
- Direct and indirect light distribution

350 x 82 mm

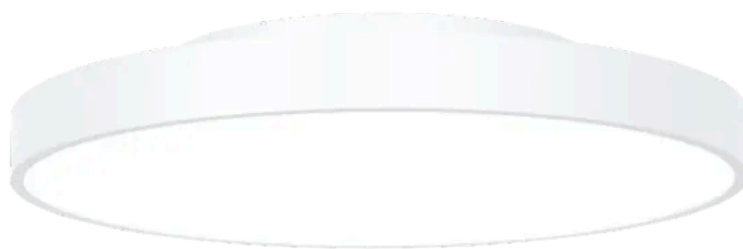

# zwena connect LS C350 3K

ZWENA CONNECT C

## Technical Data

| IDENTIFICATION            |                             | CONNECTIVITY                |                             | Direct/indirect ratio separately controllable |                                |
|---------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------------------------|--------------------------------|
| Source                    | woocommerce                 | With radio network control  | Yes                         |                                               | No                             |
| DIMENSIONS                |                             | LIGHTING TECHNOLOGY         |                             | With program-controlled lighting control      | Yes                            |
| Product status            | Normal                      | Colour temperature          | 3000 K                      | Constant light output control                 | Yes                            |
| Successor                 | 222057                      | LED colour deviation        | SDCM3                       | HOUSING & MATERIAL                            |                                |
| Manufacturer              | Nevalux                     | Colour rendering index      | 80-89                       | Protection class (IP)                         | IP20                           |
| ELECTRICAL                |                             | Illuminant                  | LED                         | Protection class                              | I                              |
| Mains connection          | 200...240 V / 50 – 60 Hz    | Luminous flux               | 1700 lm (Down 1200, Up 500) | Ambient temperature                           | -20...45 °C                    |
| Power                     | 18 W                        | Beam angle                  | Down 95°, Up 100°           | Housing material                              | Aluminum                       |
| Replaceable driver        | Yes                         | Luminaire luminous efficacy | 94 lm/W                     | Cover material                                | Microprismatic acrylic glass   |
| Type of wiring            | Suitable for through wiring | Glare value                 | UGR < 18                    | Mounting type                                 | Ceiling / wall surface-mounted |
| LED rated current         | 450 mA                      | LIFETIME                    |                             | Colour                                        | White                          |
| SENSOR TECHNOLOGY         |                             | LED lifespan (25 °C)        | 50000 h                     | SCOPE OF DELIVERY & WARRANTY                  |                                |
| With motion detector      | No                          | SETTINGS                    |                             | Manufacturer warranty                         | 5 years                        |
| Nevalux sensor technology | Smartlink, BT SIG Mesh      | DALI dimming                | Yes                         | CERTIFICATES & EPREL                          |                                |
| With light sensor         | Yes                         | With emergency light        | No                          | EPREL energy efficiency class                 | F                              |

# zwena connect LS C350 3K

ZWENA CONNECT C

## Accessories

| ARTICLE NUMBER                                                                            | DESCRIPTION                                 | CATEGORY             |
|-------------------------------------------------------------------------------------------|---------------------------------------------|----------------------|
|  221753   | Emergency Package 1h (50V/1.5W/Compact/PS)  | Emergency lighting   |
|  221570  | Connect TK2 BLM                             | Pushbutton interface |
|  221591  | Smartlink T-Board PB4                       | Wireless push-button |
|  221970   | Bluetooth EDIZIO.liv SNAPFIX Low Energy PB2 | Wireless push-button |
|  221971 | Bluetooth EDIZIO.liv SNAPFIX Low Energy PB4 | Wireless push-button |

ORDERING INFORMATION

Art.-Nr.

221546

Typ

zwena connect LS C350 3K

neva  
lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss