

IS 3360 DALI-2 APC - concealed, sq.

PRESENCE DETECTOR

neva
lux

EAN 4007841033514

78 x 94 x 94 mm



IS 3360 DALI-2 APC - concealed, sq.

EAN 4007841033514

PRESENCE DETECTOR

Technical Data

IDENTIFICATION

PU1 EAN	4007841033514
Material number	110046028
SAP designation	BEWEGUNGSMELDER IS 3360-E DALI UP WS
Version	Motion and Presence Detector
Product name data sheet	IS 3360 DALI-2 APC - concealed, sq.
Product category	Presence detector
Discount group	B
Source	Steinel Excel
Product status	Normal
Manufacturer	Steinel

DIMENSIONS

Dimensions L x W x H	78 x 94 x 94 mm
PU1 net weight	0.144

ELECTRICAL

Mains connection	220 – 240 V / 50 – 60 Hz
Control output DALI	Broadcast 1x30 electronic ballasts

SENSOR TECHNOLOGY

Max. mounting height	4,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Opening angle	180 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes

Electronic scalability	No
Mechanical scalability	No
Radial range	Ø 8 m (50 m²)
Tangential range	Ø 40 m (1257 m²)
Switching zones	1416 switching zones
Mounting height	2,50 – 4,00 m
Presence range	Ø 3 m (7 m²)
Optimal mounting height	2,8 m
Nevalux sensor technology	DALI 2

CONNECTIVITY

Networking	Yes
Type of networking	Master/slave
Networking via	Cable

LIGHTING TECHNOLOGY

Soft light start	Yes
Continuous light	selectable, 4h
Constant light regulation	Yes

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Base light function	Yes
Base light function time	1-30 min all night
Main light adjustable	50 - 100 %
Functions	Normal / test mode Manual ON / ON-OFF Constant- lighting control ON-OFF
Settings via	Remote control Potentiometers Smart Remote

With remote control	No
Twilight setting teach	Yes
Base light function in percent	10 – 50 %
Base light function percent from	10
Base light function percent to	50

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	production facilities recreation room changing room function room / ancillary room sports hall reception / lobby stairwell WC / washroom multi-storey / underground car park warehouse Indoors

Colour	white
RAL colour	9003

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

CERTIFICATES & EPREL

Certificates DALI-2


IS 3360 DALI-2 APC - concealed, sq.

PRESENCE DETECTOR

EAN 4007841033514

Illustrations

TECHNICAL DRAWINGS

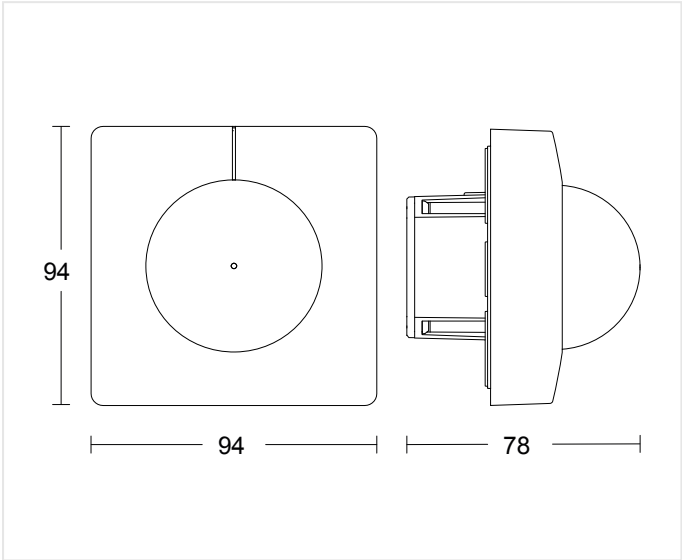

78 x 94 x 94 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


IS 3360 DALI-2 APC - concealed, sq.

PRESENCE DETECTOR

EAN 4007841033514


Wiring Diagrams

WIRING DIAGRAM 1

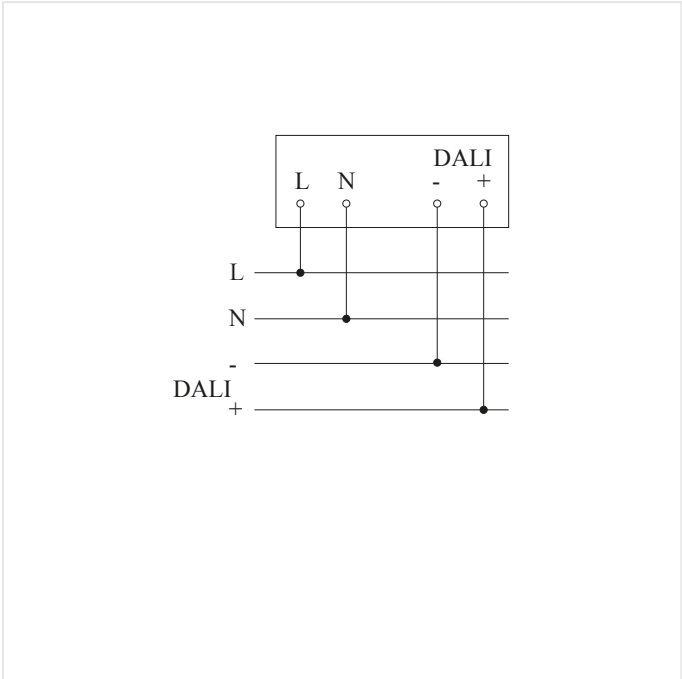

Master circuit diagram

WIRING DIAGRAM 2

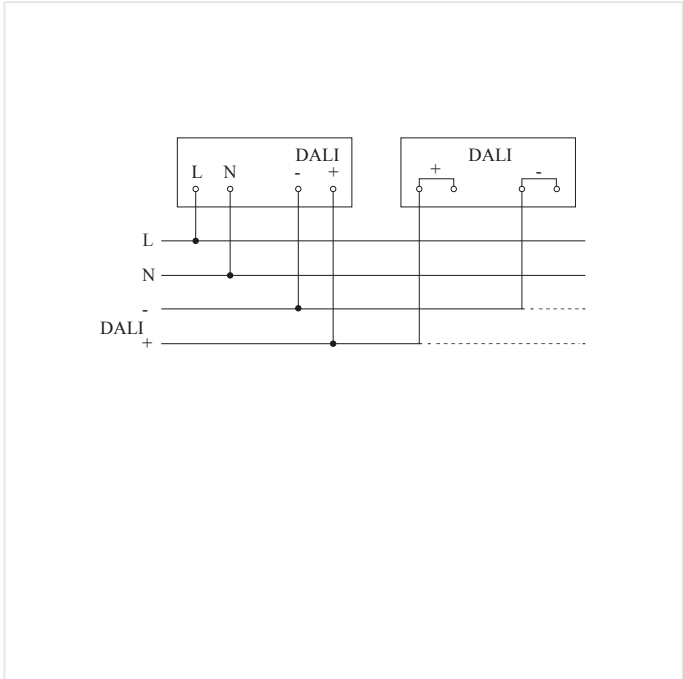

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

IS 3360 DALI-2 APC - concealed, sq.

EAN 4007841033514

PRESENCE DETECTOR

Highlights



UV-resistant plastic



Optional remote controls

IS 3360 DALI-2 APC - concealed, sq.

PRESENCE DETECTOR

EAN 4007841033514

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841056728	Schwarze Blende für IR-Sensoren Unterputz eckig	Accessory
 4007841056742	Schwarze Blende für IR-Sensoren Unterputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

033514

EAN

4007841033514

Typ

IS 3360 DALI-2 APC - concealed, sq.

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss