

IS 345 DALI-2 Input Device - surface, rd.

neva
lux**MOTION DETECTOR**

EAN 4007841057299

126 x 78 mm



IS 345 DALI-2 Input Device - surface, rd.

MOTION DETECTOR

EAN 4007841057299

Technical Data

IDENTIFICATION		SENSOR TECHNOLOGY		SETTINGS	
PU1 EAN	4007841057299	Max. mounting height	5,00 m	Twilight switch	Yes
Material number	110061480	Sensor technology	passive infrared	Twilight setting	2 – 1000 lx
SAP designation	BEWEGUNGSMELDER IS 345-R DALI2 AP WS	With motion detector	Yes	Base light function	No
Version	Motion detectors	Detection angle	360 °	Base light function time	1-30 min, all night
Product name data sheet	IS 345 DALI-2 Input Device - surface, rd.	Opening angle	45 °	Main light adjustable	No
Product category	Motion detector	Sneak-under protection	Yes	Settings via	Bus
Discount group	B	Segment-by-segment masking	Yes	With remote control	No
Source	Steinel Excel	Electronic scalability	No	Twilight setting teach	No
Product status	Normal	Mechanical scalability	No	HOUSING & MATERIAL	
Manufacturer	Steinel	Radial range	12 x 6 m (72 m²)	Protection class (IP)	IP54
DIMENSIONS		Tangential range	23 x 6 m (138 m²)	Ambient temperature	from -20 up to 50 °C
Dimensions L x W x H	78 x 95 x 95 mm	Switching zones	280 switching zones	Mounting location	ceiling
Dimensions Ø x H	126 x 78 mm	Mounting height	2,5 – 5 m	Application location	Outdoors Indoors
PU1 net weight	0.158	Optimal mounting height	2,8 m	Mounting type	Surface wiring
ELECTRICAL		Nevalux sensor technology	DALI 2	Material	Plastic
Mains connection	12 – 22,5 V / 50 – 60 Hz	CONNECTIVITY		Application room	corridor / aisle multi-storey / underground car park outdoors Indoors
Supply voltage detail	DALI bus	Networking	Yes	Colour	white
Control output DALI	Addressable/slave	Type of networking	Master/slave	RAL colour	9003
Max. current consumption per IEC 62386-101	24 mA	Networking via	DALI bus	SCOPE OF DELIVERY & WARRANTY	
Typical current consumption at 16 V input voltage	5 mA	Number of DALI participants	3	Manufacturer warranty	5 years
Max. current consumption at 10 V input voltage in regular operation	7 mA	With bus coupler	Yes	Corner wall bracket included	No
		LIGHTING TECHNOLOGY		CERTIFICATES & EPREL	
		Soft light start	No	Certificates	DALI-2
		Constant light regulation	No		


IS 345 DALI-2 Input Device - surface, rd.

MOTION DETECTOR

EAN 4007841057299

Illustrations

TECHNICAL DRAWINGS

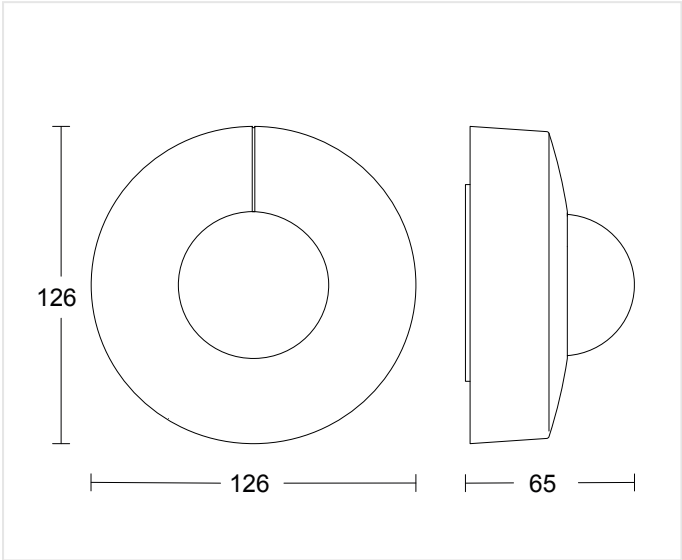

126 x 78 mm

MOUNTING HEIGHT

2,5 – 5 m BEREICH	2,8 m OPTIMAL	5,00 m MAX
----------------------	------------------	---------------

IS 345 DALI-2 Input Device - surface, rd.

MOTION DETECTOR

EAN 4007841057299

Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram

IS 345 DALI-2 Input Device - surface, rd.

EAN 4007841057299

MOTION DETECTOR

Highlights



UV-resistant plastic



Large terminal compartment

IS 345 DALI-2 Input Device - surface, rd.

MOTION DETECTOR

EAN 4007841057299

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

057299

EAN

4007841057299

Typ

IS 345 DALI-2 Input Device - surface, rd.

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss