

sensIQ S black

MOTION DETECTOR

neva
lux

EAN 4007841059606

128 x 114 x 74 mm



sensIQ S black

MOTION DETECTOR

EAN 4007841059606

Technical Data

IDENTIFICATION					
PU1 EAN	4007841059606	Electronic scalability	No	Constant light regulation	Yes
Material number	110108573	Mechanical scalability	Yes	SETTINGS	
SAP designation	BEWEGUNGSMELDER SENSIQ S KNX V3.1 SW V2	Range detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)	Twilight switch	Yes
Version	Motion detectors	Radial range	r = 4 m (42 m²)	Twilight setting	2 – 1000 lx
Product name data sheet	sensIQ S black	Tangential range	r = 20 m (1047 m²)	Time setting	60 s – 15 Min.
Product category	Motion detector	Mounting height	2,00 – 5,00 m	Base light function	Yes
Discount group	BK	Optimal mounting height	2 m	Main light adjustable	0 - 100 %
Source	Steinel Excel	Nevalux sensor technology	KNX	Settings via	ETS software Remote control Bus Smart Remote
Product status	Normal	CONNECTIVITY		With remote control	Yes
Manufacturer	Steinel	Networking	Yes	Twilight setting teach	Yes
DIMENSIONS		Type of networking	Master/master Master/slave	HOUSING & MATERIAL	
Dimensions L x W x H	128 x 114 x 74 mm	Networking via	KNX bus	Protection class (IP)	IP54
PU1 net weight	0.24	KNX functions	Light output 2x Presence output Light level Constant-lighting control Basic light level function Photo-cell controller Close range Individual pyro evaluation Logic gate	Ambient temperature	from -20 up to 50 °C
SENSOR TECHNOLOGY		With bus coupler	Yes	Application location	Outdoors Indoors
Max. mounting height	5,00 m	LIGHTING TECHNOLOGY		Mounting type	Surface wiring
Sensor technology	passive infrared	Soft light start	Yes	Material	Plastic
Detection angle	300 °	Continuous light	selectable	Colour	black
Opening angle	180 °			RAL colour	9005
Sneak-under protection	Yes			SCOPE OF DELIVERY & WARRANTY	
Segment-by-segment masking	Yes			Manufacturer warranty	5 years
				Corner wall bracket included	Yes


sensIQ S black

MOTION DETECTOR

EAN 4007841059606

Illustrations

TECHNICAL DRAWINGS

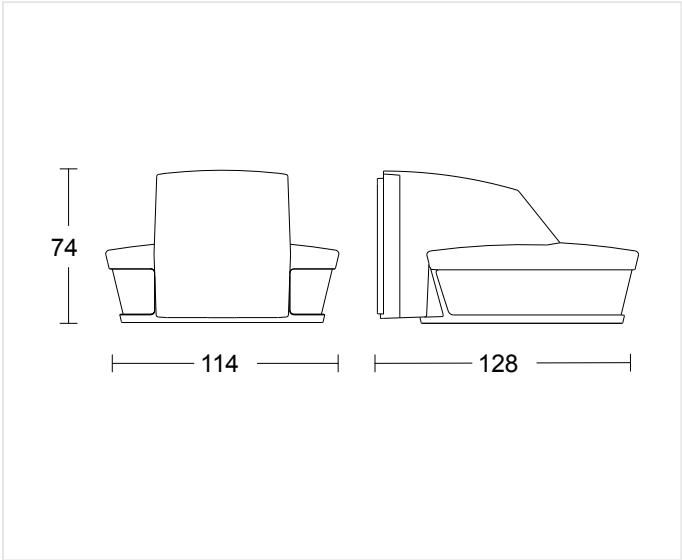

128 x 114 x 74 mm

MOUNTING HEIGHT

2,00 – 5,00 m BEREICH	2 m OPTIMAL	5,00 m MAX
--------------------------	----------------	---------------

sensIQ S black

MOTION DETECTOR

EAN 4007841059606

Highlights

**4x pyro system****UV-resistant plastic****Including corner wall mount****Remote control RC9 included****Smart Remote remote control optional**

sensIQ S black

MOTION DETECTOR

EAN 4007841059606

Accessories

ORDERING INFORMATION

Art.-Nr.	059606
EAN	4007841059606
Typ	sensIQ S black

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss