

IS 345 KNX - concealed, sq. white

MOTION DETECTOR

neva
lux

EAN 4007841058265

78 x 94 x 94 mm



IS 345 KNX - concealed, sq. white

MOTION DETECTOR

EAN 4007841058265

Technical Data

IDENTIFICATION				SETTINGS	
PU1 EAN	4007841058265	Segment-by-segment masking	Yes	Twilight switch	Yes
Material number	110062787	Electronic scalability	No	Twilight setting	2 – 1000 lx
SAP designation	BEWEGUNGSMELDER IS 345-E KNX V3.1 UP WS	Mechanical scalability	No	Time setting	5 s – 15 Min.
Version	Motion detectors	Radial range	12 x 6 m (72 m²)	Base light function	Yes
Product name data sheet	IS 345 KNX - concealed, sq. white	Tangential range	23 x 6 m (138 m²)	Main light adjustable	0 - 100 %
Product category	Motion detector	Switching zones	280 switching zones	Settings via	ETS software Remote control Bus Smart Remote
Discount group	BK	Mounting height	2,50 – 5,00 m	With remote control	No
Source	Steinel Excel	Optimal mounting height	2,5 m	Twilight setting teach	Yes
Product status	Normal	Nevalux sensor technology	KNX	HOUSING & MATERIAL	
Manufacturer	Steinel	CONNECTIVITY		Protection class (IP)	IP20
DIMENSIONS		Networking	Yes	Ambient temperature	from -20 up to 50 °C
Dimensions L x W x H	78 x 94 x 94 mm	Type of networking	Master/slave	Mounting location	ceiling
PU1 net weight	0.133	Networking via	KNX bus	Application location	Indoors
ELECTRICAL		KNX functions	Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 2x Presence output Day / night function Logic gate	Mounting type	Concealed wiring
Supply voltage detail	KNX bus	With bus coupler	Yes	Material	Plastic
SENSOR TECHNOLOGY		LIGHTING TECHNOLOGY		Application room	corridor / aisle multi-storey / underground car park Indoors
Max. mounting height	5,00 m	Soft light start	Yes	Colour	white
Sensor technology	passive infrared	Continuous light	selectable	RAL colour	9003
Detection angle	360 °	Constant light regulation	Yes	SCOPE OF DELIVERY & WARRANTY	
Opening angle	45 °			Manufacturer warranty	5 years
Sneak-under protection	Yes			Corner wall bracket included	No


IS 345 KNX - concealed, sq. white

MOTION DETECTOR

EAN 4007841058265

Illustrations

TECHNICAL DRAWINGS

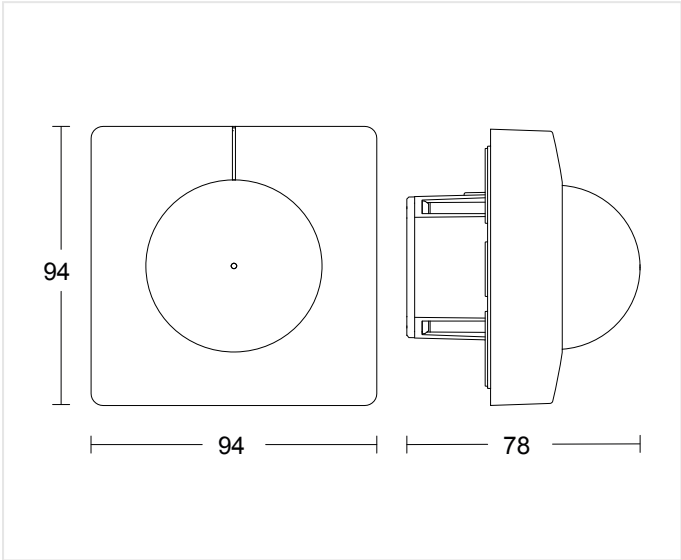

78 x 94 x 94 mm

MOUNTING HEIGHT

2,50 – 5,00 m BEREICH	2,5 m OPTIMAL	5,00 m MAX
--------------------------	------------------	---------------

IS 345 KNX - concealed, sq. white

EAN 4007841058265

MOTION DETECTOR

Highlights



UV-resistant plastic



Optional remote controls



Smart Remote remote control optional

IS 345 KNX - concealed, sq. white

MOTION DETECTOR

EAN 4007841058265

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory
 4007841056728	Schwarze Blende für IR-Sensoren Unterputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

058265

EAN

4007841058265

Typ

IS 345 KNX - concealed, sq. white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss