

lisha V2 connect LS C1500 4K

LISHA V2


neva
lux

Product code 221620

- For universal use for illumination of offices, schools, traffic zones, etc.
- Connect version with IoT lighting control for next generation lighting projects (swarm function, grouping, cleaning light etc.)
- Connect version available with light sensor (LS) or with motion detector and light sensor (PIR)
- Microprismatic diffuser for best possible glare control
- Link technology for seamless extension of the luminaire with continuous wiring
- Variants with 1.2 and 1.5 meter length available
- Housing Aluminium white

neva
lux

1518 x 60 x 80 mm

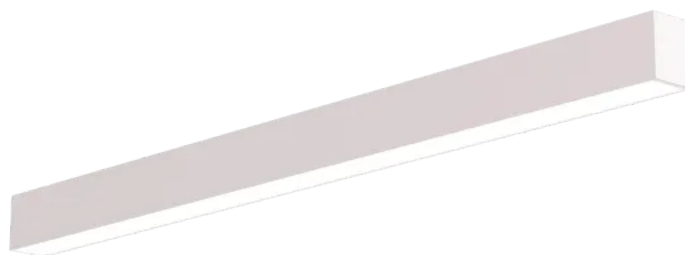

lisha V2 connect LS C1500 4K

LISHA V2

Product code 221620

Technical Data

DIMENSIONS		LIGHTING TECHNOLOGY		With program-controlled lighting control		Yes
Dimensions L × W × H	1518 x 60 x 80 mm	Colour temperature	4000 K	Constant light output control		Yes
ELECTRICAL		LED colour deviation	SDCM3	HOUSING & MATERIAL		
Mains connection	200...240 V / 50 – 60 Hz	Colour rendering index	80-89	Protection class (IP)	IP20	
Power	40 W	Illuminant	LED	Protection class	I	
Replaceable driver	Yes	Luminous flux	4800 lm	Ambient temperature	-20...45 °C	
Type of wiring	Through wiring included	Beam angle	90°	Housing material	Aluminum	
LED rated current	950 mA	Luminaire luminous efficacy	120 lm/W	Cover material	Microprismatic acrylic glass	
Maximum number of luminaires per circuit breaker	C10: 35x, C13: 45x, C16: 56x, C20: 70x, B10: 30x, B13: 39x, B16: 48x, B20: 60x	Glare value	UGR < 22	Mounting type	Ceiling surface-mounted	
SENSOR TECHNOLOGY		LIFETIME		Colour	white	
With motion detector	No	LED lifespan (25 °C)	50000 h	SCOPE OF DELIVERY & WARRANTY		
With light sensor	Yes	SETTINGS		Manufacturer warranty	5 years	
CONNECTIVITY		DALI dimming	Yes	CERTIFICATES & EPREL		
With radio network control	Yes	With emergency light	No	EPREL energy efficiency class	E	
		Suitable for light band configuration	Yes			

lisha V2 connect LS C1500 4K

LISHA V2

Product code 221620

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 221642	lisha V2 Diffusor 1M	Cover
 221772	lisha V2 Link C	Coupler/connector straight
 221618	Emergency Package 1h (50V/3.5W)	Emergency lighting
 221570	Connect TK2 BLM	Pushbutton interface
 221591	Smartlink T-Board PB4	Wireless push-button
 221970	Bluetooth EDIZIO.liv SNAPFIX Low Energy PB2	Wireless push-button
 221971	Bluetooth EDIZIO.liv SNAPFIX Low Energy PB4	Wireless push-button

ORDERING INFORMATION

Art.-Nr.

221620

Typ

lisha V2 connect LS C1500 4K

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss